



Justrite Safety Group

T39 - BRISTOL RIDGE™
PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**




T39 - BRISTOL RIDGE™ features a lighter-weight double rib high/low design that performs the scraping function of the mat. The ribbed surface brushes, channels, and conceals dirt and debris and is the perfect choice for light to medium traffic areas.

Material: Polypropylene Carpet W/Vinyl Backing

Features and Benefits:

- Lighter-weight double rib high/low design that performs the scraping function of the mat (Note: ribs run length of mat)
- Solution dyed to prevent fading
- Low profile to perform in narrow clearance doorways
- 18 ounces of needle-punched yarn per square yard.
- Vinyl backing ensures minimal buckling and mat movement.

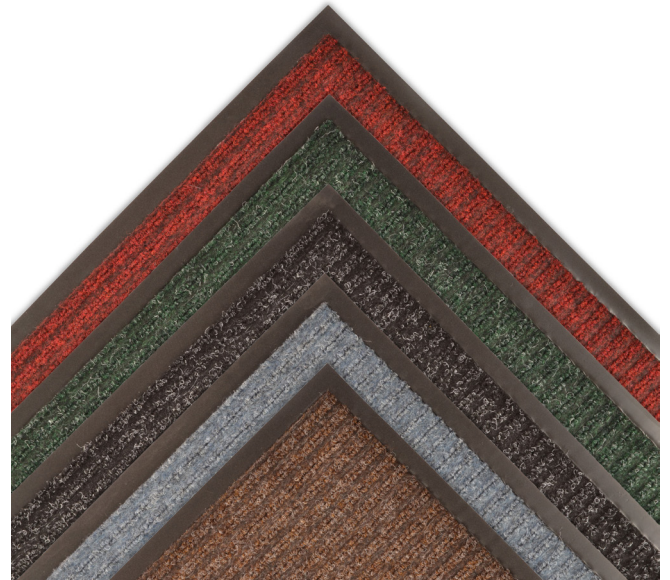

MODEL: T39

SPECIFICATIONS

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'				
Thickness	3/8"				
Colors	 Forest Green	 Coffee	 Slate Blue	 Midnight	 Cardinal

Performance:

	Good	Better	Best	Superior
Water Absorption				
Dirt Scraping				
Wearability				

APPLICATIONS

- Entranceways, lobbies and other indoor light to medium traffic areas



TESTING DATA

Test	Test Description	Results
ASTM D3884-01	Abrasion Resistance	-1.15 grams (4.4%)
ASTM D6540-00	Accelerated Soiling	Based on Visual Inspection 4.0 - Vacuum Rating 4.5 - Rating After Extraction
ASTM D5252-98a	Accelerated Wear	Based on visual inspection @ 4,000 cycles Noticeable change in appearance and color
CPSC FF 1-70 (ASTM D-2859)	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass
-	Water Retention	Weight Gain = 27.4% (0.25 gals./yd2)

*Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.