


# Continental

## Refrigerator

Project Name: \_\_\_\_\_  
 Model Specified: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item No. \_\_\_\_\_ Quantity: \_\_\_\_\_

### Undercounter Refrigerated Back Bar Coolers Shallow Depth

Models:  BBUC50S    BBUC59S    BBUC69S  
 BBUC79S    BBUC90S

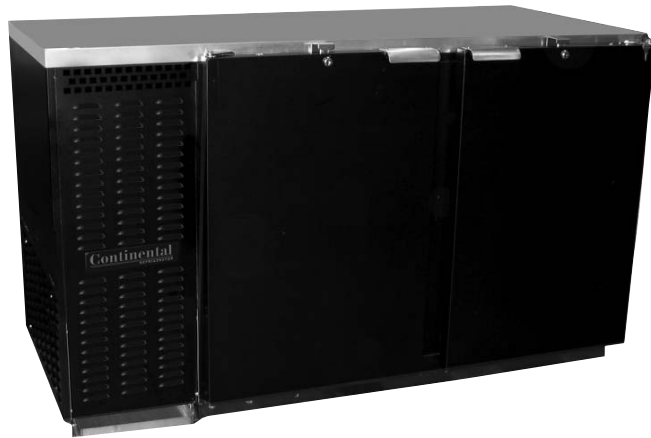

Model BBUC59S

### Options & Accessories

- |  |  |
|--|--|
| <input type="checkbox"/> 6" Adjustable Legs  | <input type="checkbox"/> SS Models - Stainless Steel Exterior, Galvanized Steel Interior |
| <input type="checkbox"/> Remote -R   | <input type="checkbox"/> Electric Condensate   |
| <input type="checkbox"/> Additional Shelves  | <input type="checkbox"/> Heavy Duty Pilasters and Shelf Clips                            |
| <input type="checkbox"/> Stainless Steel Shelves                                     | <input type="checkbox"/> Condensing Unit on the Right                                    |
| <input type="checkbox"/> 4" Locking Casters  |  |
| <input type="checkbox"/> Stainless Steel Interior for NSF 7 - approved for open food |  |
| <input type="checkbox"/> Pass Thru   |  |

### Standard Features

- Available in 50", 59", 69", 79", 90" Widths
- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Front Breathing
- Wear Resistant Black Vinyl Coated Steel Exterior with 304 Series Stainless Steel Countertop
- Heavy-Duty, Long Lasting, Galvanized Steel Interior with Reinforced Stainless Steel Floor
- Stainless Steel Reinforced Threshold Sills for Ease of Loading
- Cylinder Keyed Security Lock and Magnetic Snap-In Gasket on Each Door
- Full Length, Extra Large, Non-Corrosive, Plasticized Fin Evaporator Coil Provides Uniform Air Flow Distribution to Maintain Constant Product Temperature and Quick Uniform Recovery
- Heavy Duty, Adjustable and Epoxy-Coated Steel Shelves
- Easily Accessible and Serviceable Slide-Out Condensing Unit
- Readily Removable Front, Rear and Side Venting Louvered Grills Allow Greater Condenser Air Flow for Tight Fit Installations
- Incandescent Interior Lighting
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- High Density, Non-CFC Polyurethane Foamed-In-Place Insulation



Approval: \_\_\_\_\_



A Division of National Refrigeration & A/C Products, Inc.  
 539 Dunksferry Road Bensalem, PA 19020  
 (800) 523-7138 Fax: (215) 244-9579  
 www.continentalrefrigerator.com

Printed in U.S.A  
 March, 2009


Project Name: \_\_\_\_\_ Model Specified: \_\_\_\_\_  
 Location: \_\_\_\_\_ Item No. \_\_\_\_\_ Quantity: \_\_\_\_\_

**SPECIFICATIONS**


**DIMENSIONAL DATA**

	<b>BBUC50S</b>	<b>BBUC59S</b>	<b>BBUC69S</b>	<b>BBUC79S</b>	<b>BBUC90S</b>
Net Capacity (cu. ft.)	13	15	18	22	25
Barrel Capacity (# of Barrel Type Kegs)	—	2	3	3	4
Straight Wall Capacity (# of Straight Wall Kegs)	2	3	3	3	4
Width, Overall (in.)	50	59	69	79	90
Depth, Overall, (in.) (incl. Hdls. & Bumpers)	24 15/16	24 15/16	24 15/16	24 15/16	24 15/16
Height, Overall (in.)	34 15/16	34 15/16	34 15/16	34 15/16	34 15/16
Number of Doors	2	2	2	3	3
Number of Shelves	4	4	4	6	6
Condensing Unit Size (H.P.)	1/3	1/3	1/3	1/3	1/2
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a
Cabinet Electrical Specs	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Total Amps	9.6	9.6	10.3	10.3	13
Power Supply Cord (10 ft.)	yes	yes	yes	yes	yes
Shipping Weight (lbs.)	355	385	415	455	505
Shipping Height (in.)	46	46	46	46	46
Shipping Length (in.)	58	65	78	88	109
Shipping Depth (in.)	42	42	42	42	42


**\*\*NOTE:** A minimum clearance of 3" on each side, front and rear of cabinet is required for optimum performance.  
 Note: All specifications subject to change without notice.

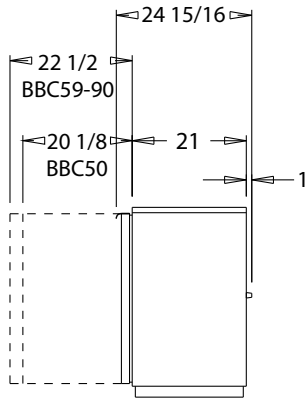


**BBUC50,59,69,79 & 90  
SHALLOW SIDE VIEW**

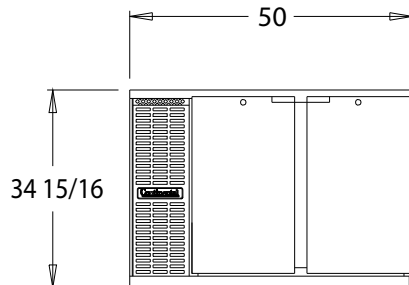


**BBUC50S FRONT VIEW**

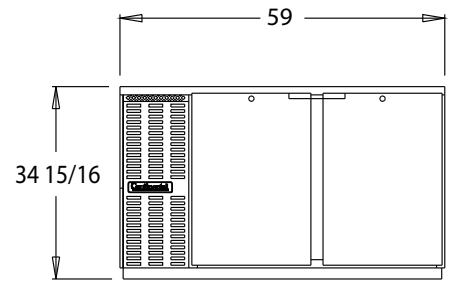


**BBUC59S FRONT VIEW**

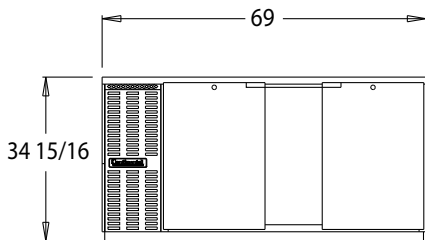

**BBUC69S FRONT VIEW**

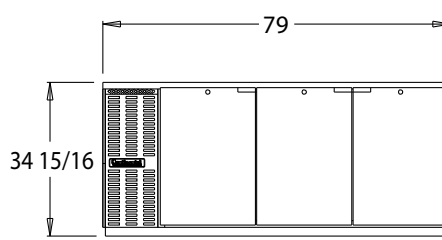

**BBUC79S FRONT VIEW**

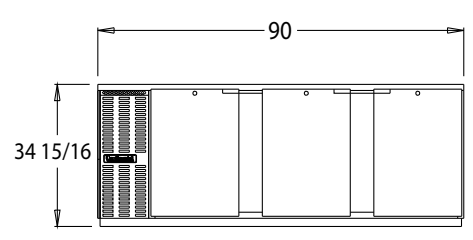

**BBUC90S FRONT VIEW**