

# BOTTLE COOLER (38°F - 41°F)

**Model: CBC64**

## 64" Standard Bottle Cooler

Wear resistant, textured baked enamel finish (black), all stainless steel countertop/slide lids and heavy-duty galvanized interior.



### Options and Accessories

(upcharge and lead times may apply)

Stainless steel exterior (-SS models)	Expansion valve system
Stainless steel interior	Casters
Additional wire bin dividers	Adjustable legs
Lid locks	Remote models
Automatic, electric condensate evaporator	Deep chill (32°F)

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Performance-rated refrigeration system

Automatic, energy-saving, non-electric condensate evaporator

Full length, extra large coil for quick top row product chilling

Easily accessible and serviceable slide-out condensing unit

#### CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Heavy-duty, epoxy-coated, adjustable steel wire bin dividers

Front, rear and side venting grilles

Easily accessible, front-mounted cleanout drainage hose

#### MODEL FEATURES

Heavy-duty bottle cap opener with extra-capacity, removable cap catcher

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

Net Capacity (cu. ft.)	20.3 (575 cu l)
Case Capacity (12 oz. bottles)	25
Case Capacity (12 oz. cans)	37
Width, Overall (in.)	64 (1626 mm)
Depth, Overall (less cap catcher) (in.)	27 1/2 (699 mm)
Height, Overall (in.)	33 1/2 (851 mm)
No. of Slide Lids	2
No. of Bin Dividers	4

### REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2050

### ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	5.4 (4.3)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

### SHIPPING DATA

Weight - (lbs.)	315 (143 kg)
Height - Crated (in.)	39 (991 mm)
Width - Crated (in.)	71 3/4 (1822 mm)
Depth - Crated (in.)	30 1/4 (768 mm)



\* Rating @ +20°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

## Model Plan Views

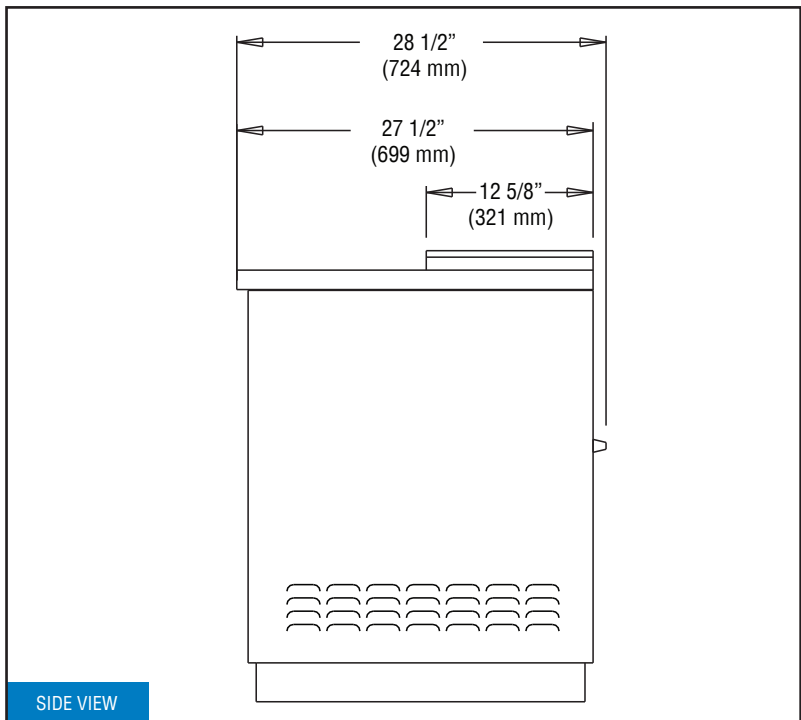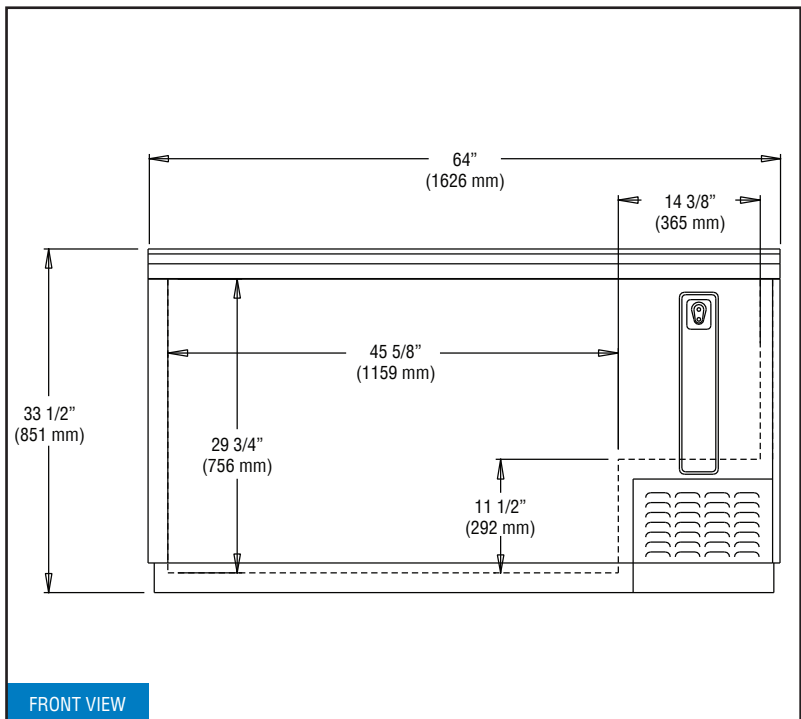

**IMPORTANT NOTE:** A minimum clearance of 3" is required on each side, front and rear of cabinet for optimum performance.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2013. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.