

Continental

Refrigerator

Project Name: _____
 Model Specified: _____
 Location: _____
 Item No. _____ Quantity: _____

Direct Draw Draft Beer Coolers Shallow Depth

- Models: KC50S KC59S KC69S
 KC79S KC90S



Model KC69S

Options & Accessories

- | | |
|--|---|
| <input type="checkbox"/> 6" Adjustable Legs | <input type="checkbox"/> Electric Condensate |
| <input type="checkbox"/> 4" Locking Casters | <input type="checkbox"/> Shelves and Pilasters |
| <input type="checkbox"/> Remote -R | <input type="checkbox"/> Multiple Faucet Beer Columns |
| <input type="checkbox"/> Stainless Steel Interior for NSF 7 - approved for open food | <input type="checkbox"/> Condensing Unit on the Right |
| <input type="checkbox"/> SS Models - Stainless Steel Exterior, Galvanized Steel Interior | |

Standard Features

- Available in 50", 59", 69", 79", 90" Widths
- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- Front Breathing
- Wear Resistant Black Painted Steel Exterior with 304 Series Stainless Steel Countertop
- Heavy-Duty, Long Lasting, Galvanized Steel Interior with Reinforced Stainless Steel Floor
- Stainless Steel Reinforced Threshold Sills for Ease of Loading
- Cylinder Keyed Security Lock and Magnetic Snap-In Gasket on Each Door
- Full Length, Extra Large, Non-Corrosive, Fin Evaporator Coil Provides Uniform Air Flow Distribution To Maintain Constant Keg Temperature and Quick Uniform Recovery
- Continuously Cooled 3" Diameter Beer Column with Dual Stainless Steel Lever Faucets (only for KC50), CO₂ Pressure Relief Distributor and Keg Line Tubing with Clamps
- Easily Removable Stainless Steel Drip Tray with Convenient Front Mounted Cleanout Drainage Hose
- Easily Accessible and Serviceable Slide-Out Condensing Unit
- Incandescent Interior Lighting
- Readily Removable Front, Rear and Side Venting Louvered Grills Allow Greater Condenser Air Flow for Tight Fit Installations
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- High Density, Non-CFC Polyurethane Foamed-in-Place Insulation



Approval: _____



A Division of National Refrigeration & A/C Products, Inc.
 539 Dunksferry Road Bensalem, PA 19020
 (800) 523-7138 Fax: (215) 244-9579
 www.continentalrefrigerator.com

Printed in U.S.A
 March, 2009


Project Name: _____ Model Specified: _____
 Location: _____ Item No. _____ Quantity: _____

SPECIFICATIONS


DIMENSIONAL DATA

	KC50S	KC59S	KC69S	KC79S	KC90S
Net Capacity (cu. ft.)	13	15	18	22	25
Barrel Capacity (# of Barrel Type Kegs)	—	2	3	3	4
Straight Wall Capacity (# of Straight Wall Kegs)	2	3	3	3	4
Width, Overall (in.)	50	59	69	79	90
Depth, Overall, (in.)	23	23	23	23	23
Height, Overall (in.) (Not Incl. 12" Towers)	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄	36 ³ / ₄
Number of Doors	2	2	2	3	3
Number of Beer Columns	1	2	2	2	2
Condensing Unit Size (H.P.)	1/3	1/3	1/3	1/3	1/2
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a
Cabinet Electrical Specs	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Total Amps	9.6	9.6	10.3	10.3	13.0
Power Supply Cord (10 ft.)	yes	yes	yes	yes	yes
Shipping Weight (lbs.)	355	385	415	455	505
Shipping Height (in.)	46	46	46	46	46
Shipping Length (in.)	58	65	78	88	109
Shipping Depth (in.)	42	42	42	42	42


****NOTE:** A minimum clearance of 3" on each side, front and rear of cabinet is required for optimum performance.

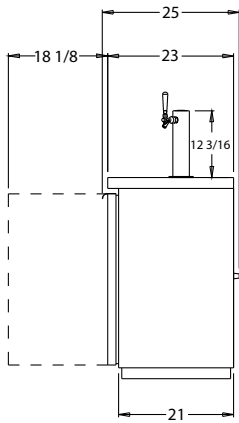


**KC50,59,69,79 & 90
SHALLOW SIDE VIEW**

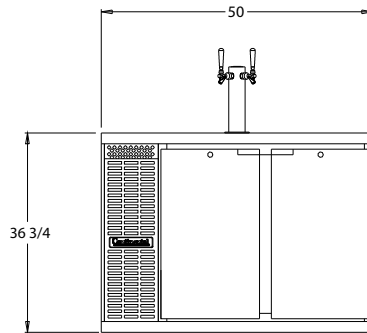


KC50 FRONT VIEW

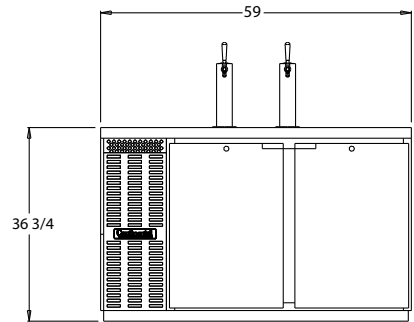


KC59 FRONT VIEW

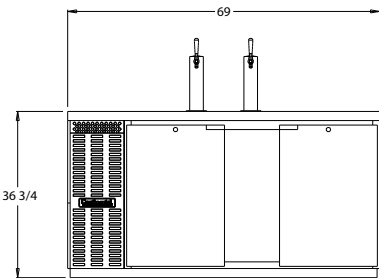

KC69 FRONT VIEW

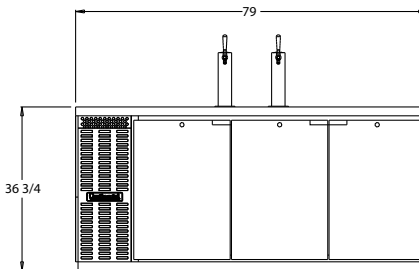

KC79 FRONT VIEW

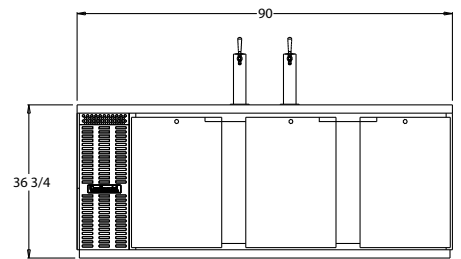

KC90 FRONT VIEW