

# DESIGNER LINE ROLL-THRU WARMER

**Model: DL2WI-RT**

## 2-Section Roll-Thru Warmer with 66 1/4" Cart Capacity

Standard - Stainless steel front, aluminum end panels and interior  
 Suffix SA- Stainless steel exterior, aluminum interior  
 Suffix SS - Stainless steel exterior and interior



### Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Chrome or stainless steel shelves	<b>Correctional Facility Options</b>
Rehinging of doors (consult factory)	<ul style="list-style-type: none"> <li>One way security screws</li> </ul>
Custom laminates	<ul style="list-style-type: none"> <li>Locking hasp (lock not included)</li> </ul>
Half doors	<ul style="list-style-type: none"> <li>Stainless steel mesh cover</li> </ul>
Roll-In	<ul style="list-style-type: none"> <li>Coverless hinges</li> </ul>
Hinged glass doors	

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### HEATING SYSTEM

- Self-contained, performance-rated "plug" warming system
- 90°F - 180°F temperature range
- Humidity relief vent with master on/off control switch
- Unique air flow distribution ducts
- Heating system is accessible on top of cabinet, separate from the food zone

#### CABINET ARCHITECTURE

- Removable stainless steel rack guides
- Removable stainless steel ramps
- Reinforced stainless steel floor
- 3" non-CFC polyurethane foam insulation
- Chrome-plated flow line handles
- Cam action, lift off hinges
- Magnetic snap-in door gaskets
- Cylinder lock in door
- Self-closing doors
- 66 1/2" high door openings (66 1/4"H rack capacity\*)

#### Standard Finish

Stainless steel front, aluminum end panels and interior

#### -SA Finish

Stainless steel exterior, aluminum interior

#### -SS Finish

Stainless steel exterior and interior

#### MODEL FEATURES

- Automatic interior lighting
- External thermostat control
- External digital thermometer

\* Racks not supplied

**IMPORTANT NOTE:** Cabinet upper side panels and heating "plug" system can be easily removed and reinstalled at installation site where space limitations are confining.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

Net Capacity (cu. ft.)	64 (1812 cu l)
Width, Overall (in.)	68 1/2 (1740 mm)
Depth, Overall (incl. handles) (in.)	38 3/4 (984 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	98 (2489 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Door(s)	4
Rack Capacity**	2 ea.

### ELECTRICAL DATA



Voltage (int'l)	115/208-230/60/1 (220/50/1)
Total Wattage @ 208-230 Volts	3000
Feed Wires (incl. ground)	4
Total Amps (int'l)	14.5 (13.8)
10 ft. Cord/Plug [attached] (int'l)	No (No)

### SHIPPING DATA

Height - Crated (in.)	90 (2286 mm)
Width - Crated (in.)	77 (1956 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	168 (4757 cu l)
Weight Std - Crated (lbs.)	780 (354 kg)
Weight SS - Crated (lbs.)	825 (374 kg)
Weight Std - Uncrated (lbs.)	625 (283 kg)
Weight SS - Uncrated (lbs.)	660 (299 kg)

\*\* Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H  
Figures in parentheses reflect metric equivalents rounded to the nearest whole millimeter.

## Model Plan Views

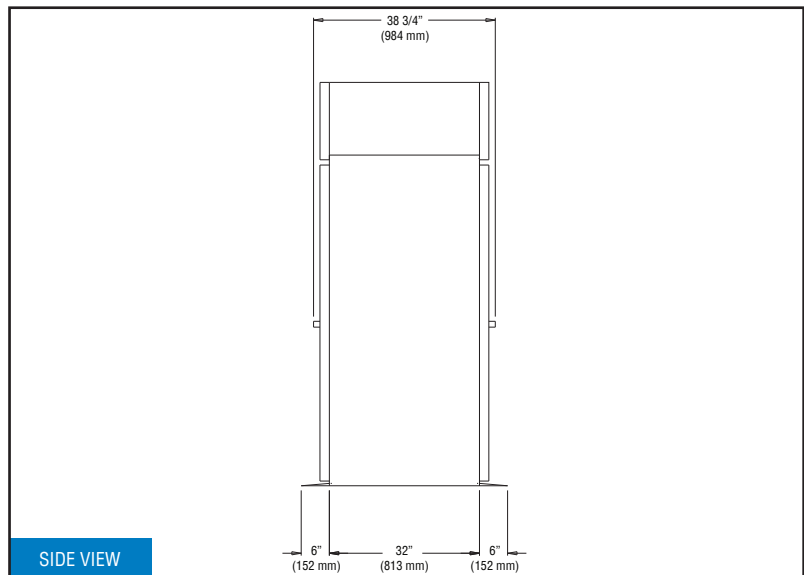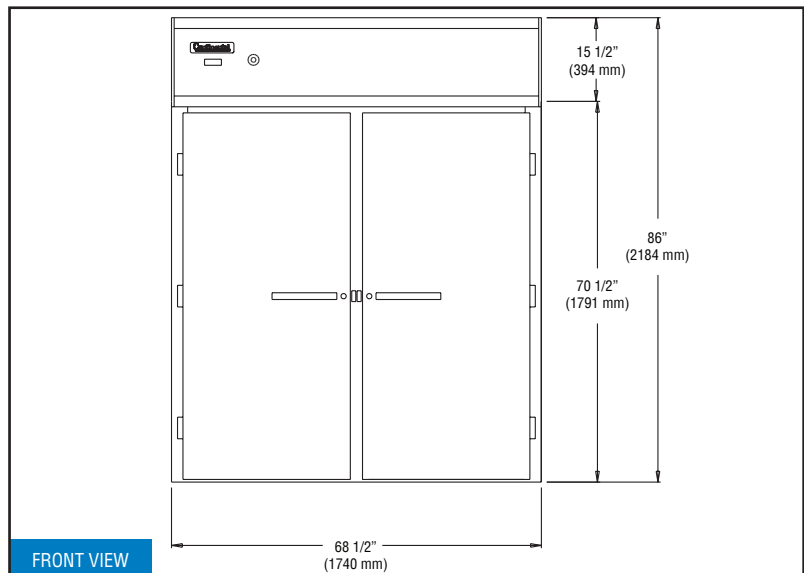

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

### HEATING SYSTEM (Range 90°F - 180°F)

Electrically operated heating system is controlled by means of a highly sensitive calibrated thermostat mounted on the cabinet front. Fin strip heating elements are located at the base of the interior. Air circulating blower located in a top mounted, concealed "plug" housing distributes heat throughout product zone, assuring uniform cabinet temperatures. Cabinet top has a built-in humidity relief vent. The entire "plug" system is mounted on a sturdy steel, rail-type base which can be easily removed if refrigerator or freezer conversion is desired. A strict quality assurance team inspects all material and components to certify that each model conforms to the most exacting standards. All models are factory performance tested for a minimum of 16 hours prior to crating.

### INSULATION

All cabinet walls, top and bottom have high density, foamed-in-place, non-CFC polyurethane insulation.

### CABINET CONSTRUCTION

All materials are of top quality, assembled to conform with strict quality-assurance requirements.

The cabinet front is constructed of heavy-gauge polished stainless steel for durability. All cabinet joints and seams are sealed vapor-tight. Case is of all metal, welded construction and internally supported and braced for a rigid unit construction. Cabinet design eliminated overlapping panels with raw edges. Cabinet body is insulated with non-CFC, foamed-in-place polyurethane foam with an average thickness of 3 inches to ensure increased energy efficiency. Automatic interior lighting is controlled by door openings. Cabinets are equipped with an easily removable, stainless steel ramp and interior rack guides.

### DOOR CONSTRUCTION

Solid hinged door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are welded construction and polished. Replaceable snap-in door gaskets are self-adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Doors are provided with built-in cylinder locks which are keyed alike. Hinges are cam action, lift-off type featuring positive safety stop at 120 degrees.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2013. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

DL2WI-RT (8/14/13)