UNDERCOUNTER REFRIGERATOR

Model: SW48-U-SGD

48" Undercounter Refrigerator with Sliding Glass Doors

Stainless steel front, top and end panels, aluminum back and interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Drawers in lieu of sliding glass doors
Stainless steel back	Automatic electric condensate evaporator
Stainless steel shelves	Expansion valve system
Additonal epoxy-coated steel shelves	Door locks
Hinged glass doors in lieu of sliding glass doors	Special electrical requirements (consult factory)
Solid doors in lieu of sliding glass doors	

Consult factory for other model configurations, options and accessories



Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system Environmentally-safe R-134a refrigerant

Automatic, energy-saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil Easily serviceable back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation Double pane, low-e tempered, self closing sliding glass doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelf

Completely enclosed, vented and removable case back

1 3/8" diameter plate casters (factory installed)

MODEL FEATURES

Electronic controller w/ digital display
2" high, bottom mounted front breather air divider
LED interior lighting



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

DIMENSIONAL DATA

13.4 (379 cu I)
48 (1219 mm)
31 (787 mm)
31 13/16 (808 mm)
6.8 (.6 sq m)
2
2
See Drawing
26 1/4 (667 mm)
44 (1118 mm)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4	
Capacity (BTU/Hr)*	1940	

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	7.2 (3.9)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	265 (120 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	55 (1397 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2017. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

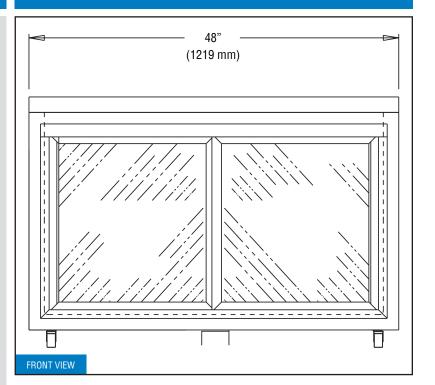

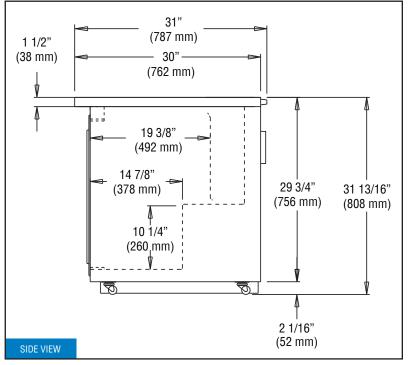

NOTE: For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.