

REACH-IN FREEZER (0°F)

Model: 1FXS

1-Section Extra-Wide Reach-In Freezer Shallow Depth

1FXS - Stainless steel front, aluminum end panels and interior
 1FXS-SA - Stainless steel exterior, aluminum interior
 1FXS-SS - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|---|
| Stainless steel case back | Pass-Thru |
| Additional epoxy-coated steel shelves | Standard depth |
| Chrome or stainless steel shelves | Hinged glass door |
| Rehinging of door (consult factory) | Increased refrigeration systems |
| Expansion valve system | Special electrical req. (consult factory) |
| Adjustable legs | Correctional Facility Options |
| Digital thermometer | • One way security screws |
| Remote models | • Locking hasp (lock not included) |
| Custom laminates | • Stainless steel mesh cover |
| Half doors | • Coverless hinges |

Consult factory for other model configurations, options and accessories.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Self-closing door

Magnetic snap-in door gasket

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

External dial thermometer

Energy saving switch for door heater

Automatic electric defrost

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|------------------|
| Net Capacity (cu. ft.) | 26 (736 cu l) |
| Width, Overall (in.) | 36 1/4 (921 mm) |
| Depth, Overall (in.) (incl. handle) | 29 1/4 (743 mm) |
| Depth [less door] (in.) | 25 7/8 (657 mm) |
| Depth [door open 90°] (in.) | 60 3/4 (1543 mm) |
| Clear Door Width (in.) | 29 5/8 (752 mm) |
| Clear Door Height (in.) | 58 5/8 (1489 mm) |
| Height, Overall (in.) (incl. 5" casters) | 82 1/4 (2089 mm) |
| No. of Doors | 1 |
| No. of Shelves | 3 |
| Shelf Area (sq. ft.) | 24.4 (2.3 sq m) |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/2 |
| Capacity (BTU/Hr)* | 1840 |

ELECTRICAL DATA

| | |
|-------------------------------------|---------------------|
| Voltage (int'l) | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground) | 3 |
| Total Amps (int'l) | 9.7 (4.5) |
| Defrost Amps (int'l) | 6.5 (3.3) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA

| | |
|------------------------------|------------------|
| Height - Crated (in.) | 85 1/2 (2172 mm) |
| Width - Crated (in.) | 42 (1067 mm) |
| Depth - Crated (in.) | 42 (1067 mm) |
| Volume - Crated (cu. ft.) | 87 (2464 cu l) |
| Weight Std - Crated (lbs.) | 445 (202 kg) |
| Weight SS - Crated (lbs.) | 505 (229 kg) |
| Weight Std - Uncrated (lbs.) | 345 (156 kg) |
| Weight SS - Uncrated (lbs.) | 405 (184 kg) |



* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

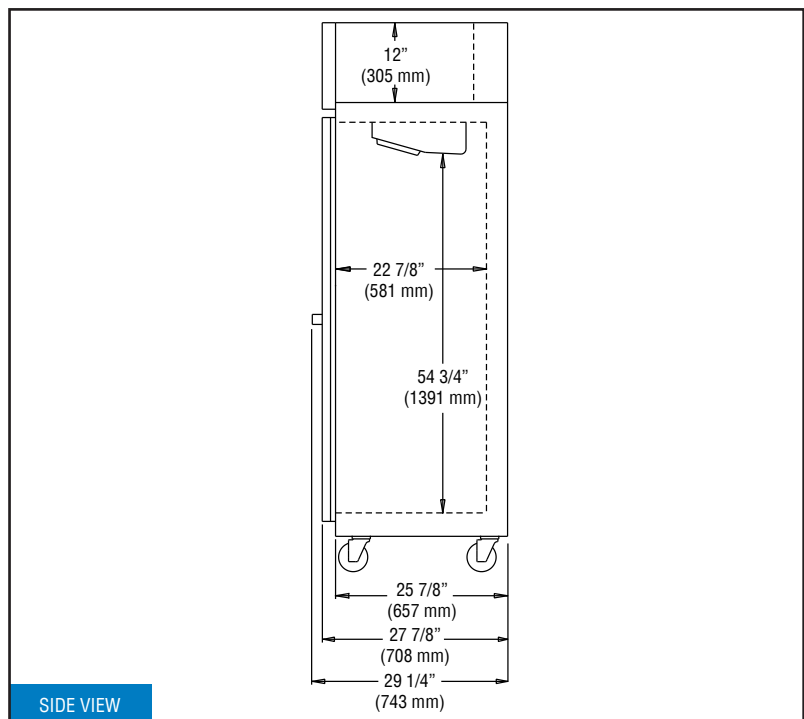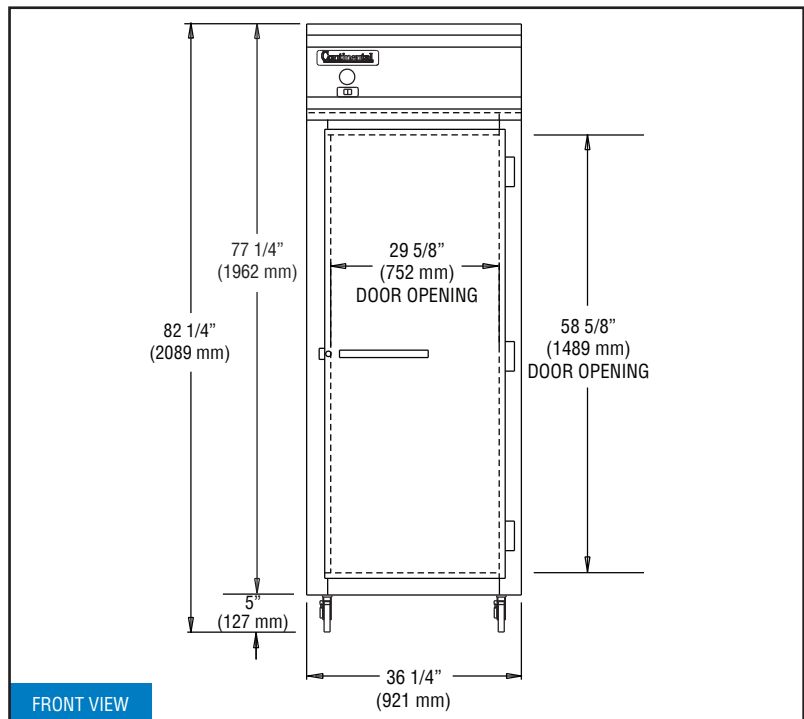

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2015. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.