BACK BAR EQUIPMENT

Model: **BBUC69**

69" Undercounter Back Bar Cooler

Textured baked enamel finish (black) exterior with aluminum subtop, heavy-duty galvanized interior with reinforced stainless steel floor.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel exterior (-SS models)	Condensing unit on right	
Stainless steel subtop	Wine rack	
Food storage rated stainless steel interior (NSF-7)	Remote models	
Glass doors in lieu of solid doors	Expansion valve system	
Add'l epoxy-coated shelves with clips	Casters or legs	
Stainless steel shelves with clips	Shallow depth	
Automatic, electric condensate evaporator	Pass-thru	



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated **front breathing** refrigeration system Environmentally-safe R-134a refrigerant Full length, extra large coil Automatic, energy-saving, non-electric condensate evaporator

CABINET ARCHITECTURE

High density, non-CFC polyurethane
foamed-in-place insulationHeavy-duty, epoxy-coated steel shelvesMagnetic snap-in gasket (each door)Cylinder-keyed security lock (each door)Stainless steel reinforced threshold

MODEL FEATURES

Easily accessible and serviceable slide-out condensing unit Removable front, rear and side venting louvered grills Interior lighting

APPROVAL:

Model Specifications

Model Plan Views

DIMENSIONAL DATA

Net Capacity (cu. ft.)	26 (736 cu l)
Width, Overall (in.)	69 3/16 (1757 mm)
Depth, Overall (in.) (incl. handles & bumpers)	29 1/4 (743 mm)
Depth, Body Only (in.) (less doors)	25 (533 mm)
Height, Overall (in.)	34 15/16 (887 mm)
Barrel Capacity (# barrel type kegs)	3
Straight Wall Capacity (# straight wall kegs)	3
No. of Doors	2
No. of Shelves	4

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2250

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	6.7 (5.0)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	425 (193 kg)
Height - Crated (in.)	46 (1168 mm)
Width - Crated (in.)	78 (1981 mm)
Depth - Crated (in.)	42 (1067 mm)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2015. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.



Intertek



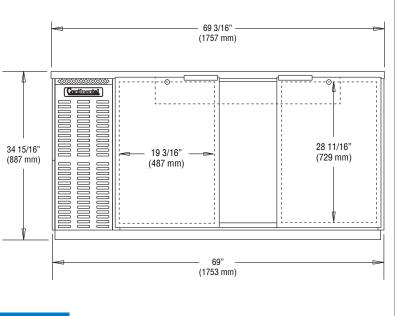

FRONT VIEW

