

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



Models Available BBUC50 BBUC59 BBUC69 BBUC79 BBUC90

Standard Features

- Modern, State-of-the-Art Styling
- Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- · Wear Resistant Black Vinyl Coated Steel Exterior
- Heavy-Duty, Long Lasting, Galvanized Steel Interior with Reinforced Stainless Steel Floor
- Stainless Steel Reinforced Threshold Sills for Ease of Loading
- Cylinder Keyed Security Lock and Magnetic Snap-In Gasket on Each Door
- Full Length, Extra Large, Coil Provides Uniform Air Flow Distribution to Maintain Constant Product Temperature and Quick Uniform Recovery
- Easily Accessible and Serviceable Slide-Out Condensing Unit
- Readily Removable Front, Rear, and Side Venting Louvered Grills Allow Greater Condenser Air Flow for Tight Fit Installations
- Incandescent Interior Lighting
- Automatic, Energy Saving, Non-Electric Condensate Disposal
- High Density, Non-CFC Polyurethane Foamed-In-Place Insulation

Optional Features & Accessories


- SS Models -Stainless Steel Exterior, Galvanized Steel Interior
- Shelf and PilastersElectric Condensate
- Remote Models -R



SPECIFICATIONS	BBUC50	BBUC59	BBUC69	BBUC79	BBUC90
DIMENSIONAL DATA					
Net Capacity (cu. ft.)	16	22	26	28	35
Barrel Capacity — (# of Barrel Type Kegs)		2	3	4	4
Straight Wall Capacity — (# of Straight Wall Kegs)	2	3	3	4	5
Width, Overall (in.)	50	59	69	79	90
Depth, Overall, (in.)	27	27	27	27	27
Height, Overall (in.)	34 ¹⁵ / ₁₆	3415/16	34 ¹⁵ / ₁₆	34 ¹⁵ / ₁₆	34 ¹⁵ / ₁₆
Number of Doors	2	2	2	3	3
Number of Shelves	4	4	4	6	6
Condensing Unit Size (H.P.)	¹ / ₃	¹ / ₃	¹ / ₃	¹ / ₃	¹ / ₃
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a
Cabinet Electrical Specs	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Total Amps	8.6	8.6	9.3	9.3	10.0
Power Supply Cord (10 ft.)	YES	YES	YES	YES	YES
Shipping Weight (lbs.)	355	385	415	455	505
Shipping Height (in.)	46	46	46	46	46
Shipping Length (in.)	58	65	78	88	109
Shipping Depth (in.)	42	42	42	42	42

**NOTE: A minimum clearance of 3" on each side, front and rear of cabinet is required for optimum performance.

Note: All specifications subject to change without notice.

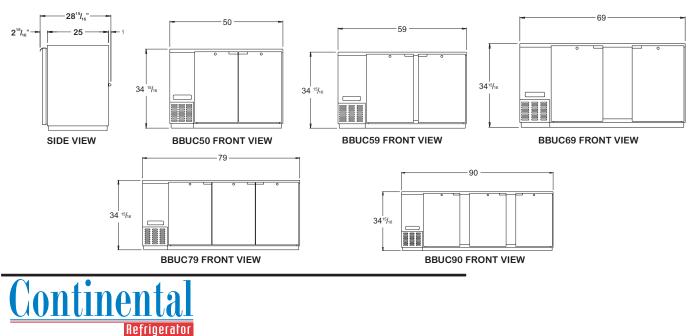

A Division of National Refrigeration & A/C Products, Inc. 539 Dunksferry Road Bensalem, PA 19020 (800) 523-7138 Fax: (215) 244-9579 www.continentalrefrigerator.com