

PRODUCT:

QUANTITY:

ITEM #:

Designed Smart

Maximum Overhead Heat for Warming Areas

- Delivers over 22% more heat to your prepared food than competitive models.
- Unique heating system provides the highest wattage in the category. High watt version has 15% more power than competition.
- Polished "mirror finished" stainless steel reflectors behind heating elements radiate more heat toward food.

Easy to Install & Customize to Current Systems

- All units come standard with sturdy stainless steel mounting brackets.
- A wide option of lengths and mounting accessories let you customize the overhead warming system that is perfect for your operation. (Stands to hold up to 24").
 - T leg stands
 - Tubular post mount stand
 - Chain suspension
- Extra electrical conduit knockout locations allow flexibility in installations.
- Available with either an infinite or toggle control that can be supplied within the unit or in a "remote" control box. (remote is recommended). Installer provides wiring between "remote" control box and unit. (remote is recommended).

Easy to Use

- Pilot lights are standard features that keep your employees aware of the unit's operations.

Built Solid

Most Durable Overhead Warmer in the Industry!

- Stainless steel construction resists corrosion, is easy to clean, and presents an attractive appearance.
- Control components are insulated in a ventilated box construction for increases reliability and longevity.
- APW Wyott overhead warming equipment is backed by a 2-year warranty on heating elements and a 1-year parts and labor warranty.

- Certified by the following agencies:


FD SERIES OVERHEAD WARMERS

Overhead Warmer Accessories

| | | |
|-----------------------------------|---------------------------------------------------------------------------------|-----------------|
| Remote control Box (shown below)* | Pilot light switch box, control and cover with single, dual, or triple controls | 1 lb. (.5 kg) |
| Tubular Stand Kit (#76180) | 1 pr. legs for permanent mounting | 5 lbs. (2.3 kg) |
| Portable Leg Kit (#76200) | 1 pr. legs and accessories for freestanding operation | 5 lbs. (2.3 kg) |
| Cord & Plug Set (#75906) | For portability, includes adapter bushing. For 120V units, 48" and less. | 7 lbs. (3 kg) |
| Chain Supports (#75901) | For overhead suspension without flush mount | 1 lb. (.5 kg) |

Remote Control Box




See reverse side for product specifications.

PRODUCT:

QUANTITY:

ITEM #:

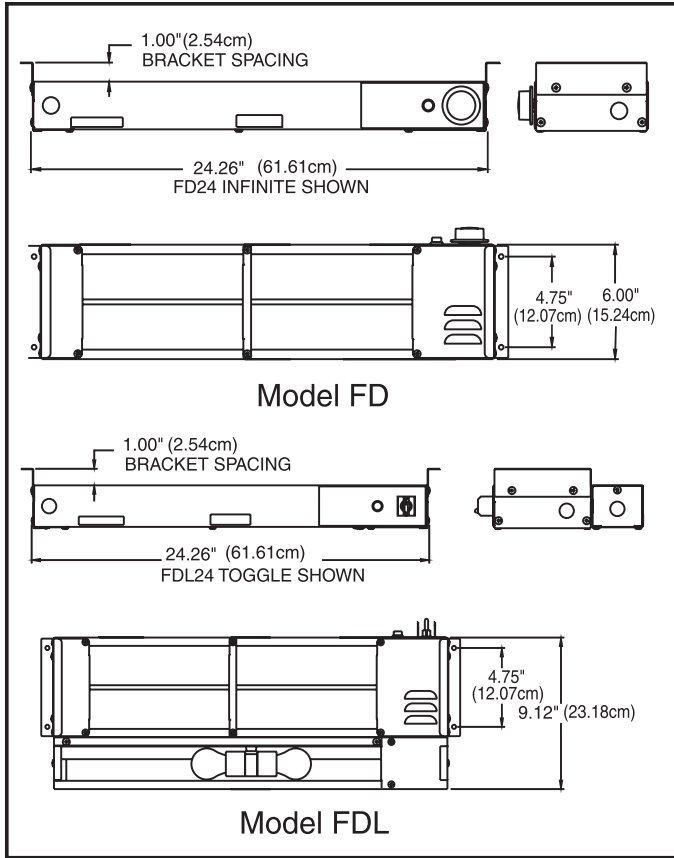

PRODUCT SPECIFICATIONS

Construction:

Stainless steel housing and radiant reflector, metal-sheathed heating element and angle brackets. "L" indicated built-on illumination box, which uses incandescent safety lights.

Electrical Information:

Specify voltage and wattage; also, infinite control or toggle switch (or remote control units that are operated by optional remote control kits). Remote control units use separate/ optional remote control kits to allow for maximum installation flexibility. Up to 3 remote units can be controlled by a single triple remote control kit. Sizes above 60" are only available in 208/240V versions.

Shipping:

FOB: Dallas, TX 75226

| | Size | Single | | | Single Lighted | | |
|--------------|------|-----------------|-----|------|-----------------|-----|------|
| | | Watts | lbs | kg | Watts | lbs | kg |
| High Wattage | 18" | 400 | 7 | 3.2 | 480 | 7 | 3.2 |
| | 24" | 575 | 7 | 3.2 | 655 | 8 | 3.6 |
| | 30" | 760 | 8 | 3.6 | 840 | 9 | 4.1 |
| | 36" | 920 | 9 | 4.1 | 1080 | 11 | 5.0 |
| | 42" | 1100 | 12 | 5.4 | 1260 | 12 | 5.4 |
| | 48" | 1265 | 12 | 5.4 | 1425 | 12 | 5.4 |
| | 54" | 1425 | 13 | 5.9 | 1585 | 14 | 6.4 |
| | 60" | 1610 | 14 | 6.4 | 1850 | 15 | 6.8 |
| | 66" | 1800 (208/240V) | 16 | 7.3 | 2040 (208/240V) | 17 | 7.7 |
| | 72" | 1980 (208/240V) | 17 | 7.7 | 2220 (208/240V) | 18 | 8.2 |
| Low Wattage | 18" | 250 | 5 | 2.3 | 330 | 6 | 2.7 |
| | 24" | 350 | 7 | 3.2 | 430 | 8 | 3.6 |
| | 30" | 450 | 8 | 3.6 | 530 | 9 | 4.1 |
| | 36" | 575 | 9 | 4.1 | 735 | 11 | 5.0 |
| | 42" | 675 | 11 | 5.0 | 835 | 12 | 5.4 |
| | 48" | 800 | 12 | 5.4 | 960 | 12 | 5.4 |
| | 54" | 925 | 13 | 5.9 | 1085 | 14 | 6.4 |
| | 60" | 1050 | 14 | 6.4 | 1290 | 15 | 6.8 |
| | 66" | 1160 (208/240V) | 16 | 7.3 | 1400 (208/240V) | 17 | 7.7 |
| | 72" | 1275 (208/240V) | 17 | 7.7 | 1515 (208/240V) | 18 | 8.2 |
| | 84" | 2050 (208/240V) | 20 | 9.5 | 2370 (208/240V) | 21 | 9.5 |
| | 96" | 2400 (208/240V) | 23 | 10.4 | 2720 (208/240V) | 24 | 10.9 |

Overall Dimensions:

FDD and FDDL models are 15" wide

- FD-18 & FDL-18: 18.26" (46.3 cm)
- FD-24 & FDL-24: 24.26" (61.6 cm)
- FD-30 & FDL-30: 30.26" (76.8 cm)
- FD-36 & FDL-36: 36.26" (92.0 cm)
- FD-42 & FDL-42: 42.26" (107.3 cm)
- FD-48 & FDL-48: 48.26" (122.5 cm)
- FD-54 & FL-54: 54.26" (137.8 cm)
- FD-60 & FDL-60: 60.26" (153.0 cm)
- FD-66 & FDL-66: 66.26" (168.2 cm)
- FD-72 & FDL-72: 72.26" (183.5 cm)
- FD-84 & FDL-84: 84.26" (214.0 cm)
- FD-96 & FDL-96: 96.26" (244.4 cm)



*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.