

# UNDERCOUNTER DISHWASHER

Model:  226-071

This undercounter dishwasher is ideal for bars, pubs, restaurants and hotels. Features a wide loading capacity granting the highest performance at a reasonable price. Beautifully designed machines with a newly re-designed control panel.

## FEATURES

- 30 racks per hour / 2 minute cycle
- 20 racks per hour/ 3 minute cycle
- Built-in detergent and rinse-aid pumps
- 185 degree sanitizing rinse every cycle
- Built-in 6530 watt booster heater for 185 degree final rinse water (40-50 degree rise)
- 2940 watt wash tank heater
- Low 0.74 gal water usage per rack
- Removable wash and rinse arms (upper and lower)
- Triple filtering system to capture soil and debris
- Top mounted controls easy to read and simple to operate
- Double skin with deep formed rack supports
- Double skin stainless steel door with security micro-switch
- Built-in drain pump

## CONSTRUCTION

- Heavy duty stainless steel construction. Internal cavity as well as exterior panels are in 304 series stainless steel

## NOISE

- 59.3 dB(A)

## DRAIN PUMP

43W hMAX 31 1/2"(10,56 gal(US)/min\*\*\*)

\*\*\*Maximum Flow Rate

## ELECTRIC

Voltage:

220V-240V/1ph/60Hz; 29.5-32.2A

220V-240V/3ph/60Hz; 17.1-18.6A

Power Required 7090W



Intertek



Intertek

## WARRANTY (USA / CANADA)

One (1) year parts

One (1) year on-site labor


Administered by The Legacy Companies, 877.368.2797

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, Each product will deliver years of trouble free, reliable, low maintenance, efficient operation.

021517W

## UNDERCOUNTER DISHWASHER

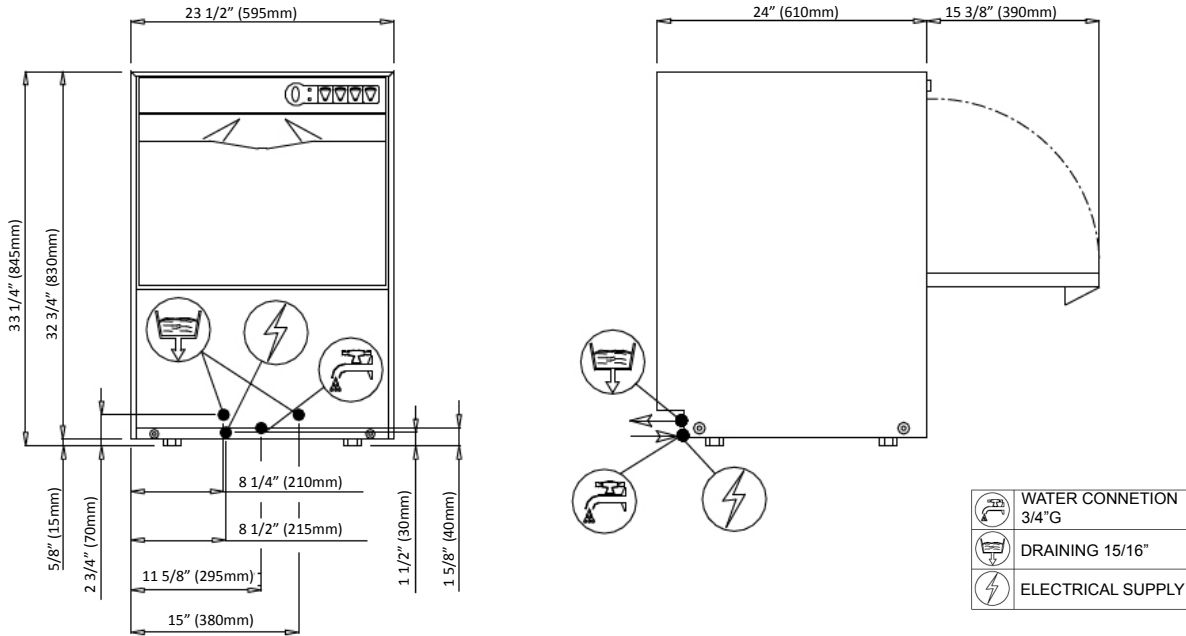

<b>Inches: External Dimensions W x D x H</b>	23 1/2" x 24" x 33 1/4"
<b>mm: External Dimensions W x D x H</b>	596 x 610 x 845 mm
<b>Weight</b>	134 lbs (60.78 kg)
<b>Inlet Water Pressure/Flow Pressure</b>	25 – 60 PSI / 15-25 PSI
<b>Plates Diameter</b>	12 3/4" (323.85mm)
<b>Dishes Max Height</b>	12 1/4" (311.15mm)
<b>Rack Dimension</b>	20" x 20" (508mm x 508mm)
<b>Washing Cycles</b>	1 (120seconds) 2 (180seconds)
<b>Racks / h</b>	30 / 20
<b>Water Inlet Temperature</b>	140°F (60°C)
<b>Water Consumption</b>	0.74 gallon (2.80 L) 15 psi Rinse Pressure
<b>Booster Capacity</b>	1.5 gallons (5.68 L)
<b>Booster Heating Element</b>	6530W
<b>Rinsing Temperature (set)</b>	185°F (85°C)
<b>Tank Capacity</b>	7.1 gallons (26.88 L)
<b>Tank Heating Element</b>	2940W
<b>Wash Temperature (set)</b>	160°F (71.1°C)
<b>Pump Power</b>	0.75HP/560 W (89.8 gal(US)/min***)

\*\*\* Maximum Flow Rate

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.