

HOOD TYPE HIGH TEMPERATURE DISHWASHER

Model: 226-072

The hood-type dishwasher is designed with state of the art electronics developed from our experience and our customers' insights to fulfill customer's criteria. The aim is to reduce consumptions in terms of energy, water and chemical products, therefore granting the final user a global savings, but also less pollution and waste of natural resources.

FEATURES

- 30 racks per hour / 2 minute cycle
- 20 racks per hour/ 3 minute cycle
- Built-in detergent and rinse-aid pumps
- 185 degree sanitizing rinse every cycle
- Built-in 9800 watt booster heater for 185 degree final rinse water (40-50 degree rise)
- 2940 watt wash tank heater
- Low 0.79 gal water usage per rack
- Removable wash and rinse arms (upper and lower) for ease of cleaning
- Triple filtering system to capture soil and debris
- Straight or corner installation with easy removable rack
- Hood operated start/stop functions
- Deep formed tank
- Built-in drain pump
- Easy to access for maintenance

CONSTRUCTION

- Heavy duty stainless steel construction. Internal cavity as well as exterior panels are in 304 series stainless steel

NOISE

- 63,6±0.7 dB(A)

DRAIN PUMP

43W hMAX 31 1/2"(10,56 gal(US)/min***)

***Maximum Flow Rate

ELECTRIC

Voltage:
230V/3ph/60Hz; 27.4A

Power Required 10920W



Intertek



Intertek

WARRANTY (USA / CANADA)

One (1) year parts

One (1) year on-site labor

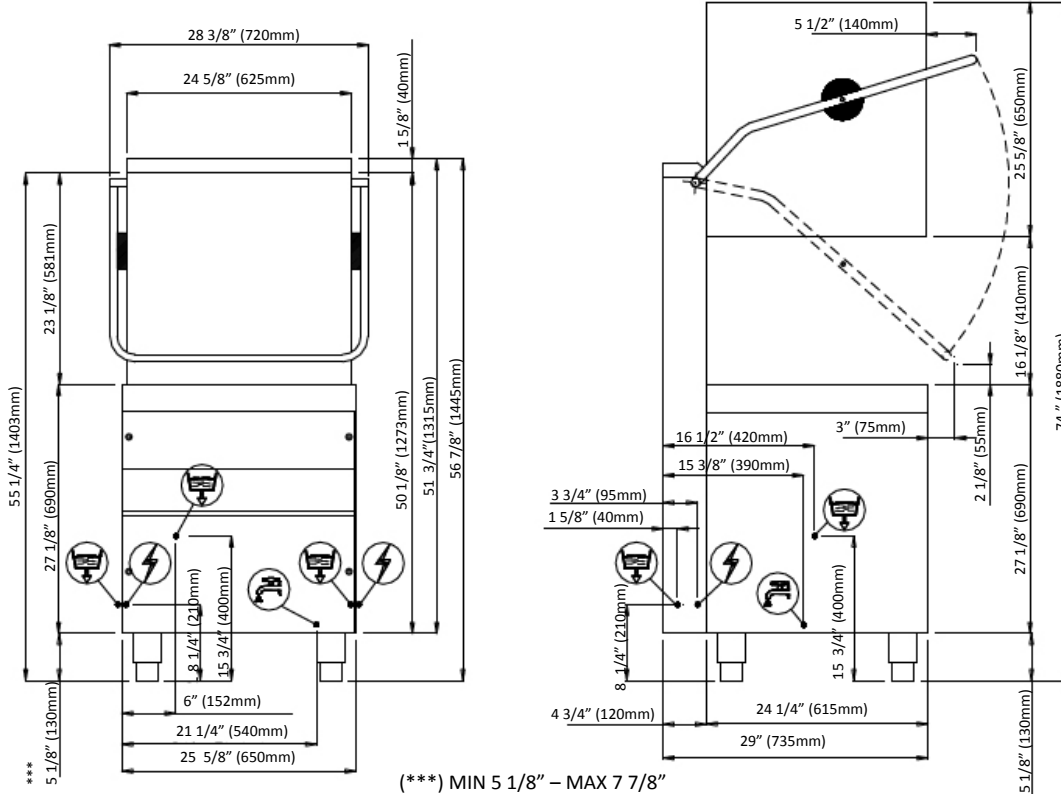
Administered by The Legacy Companies, 877.368.2797

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.




The built in performance enhancing functions ensure that given proper attention and preventative maintenance, Each product will deliver years of trouble free, reliable, low maintenance, efficient operation.

021517W

HOOD TYPE HIGH TEMPERATURE DISHWASHER



(***) MIN 5 1/8" – MAX 7 7/8"

-  WATER CONNECTION
3/4" G
-  DRAINING 15/16"
-  ELECTRICAL SUPPLY

Inches: External Dimensions W x D x H	28 3/8" x 29" x 56 7/8" 28 3/8" x 29" x 74" Open Hood
mm: External Dimensions W x D x H	720 x 735 x 1445 mm 720 x 735 x 1880 mm Open Hood
Weight	231 lbs (104.8 kg)
Inlet Water Pressure/Flow Pressure	25 – 60 PSI / 15-25 PSI
Plates Diameter	16 1/4" (412.75mm)
Rack Dimension	20" x 20" (508mm x 508mm)
Washing Cycles	1 (120 seconds) 2 (180 seconds)
Racks / h	30 / 20
Water Inlet Temperature	140°F (60°C)
Booster Capacity	2.65 gallons (10.03 L)
Booster Heating Element	9800W
Rinsing Temperature (set)	185°F (85°C)
Tank Capacity	7.9 gallons (29.90 L)
Tank Heating Element	2940W
Wash Temperature (set)	160°F (71.7°C)
Pump Power	1.5HP/1120 W (166 gal(US)/min***)

*** Maximum Flow Rate

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.