Ш



Project:	AIA#
Item:	
Location:	SIS#
Approved:	

# SCHOOL MILK COLD WALL COOLER

SM58HC Single Access Cooler **Hydrocarbon Series** 

MODEL: SM58HC-W-02

3 Year Parts/Labor Warranty **Additional 4 Year Compressor Warranty** 



#### **CABINET CONSTRUCTION**

- · White coated steel exterior
- Stainless steel interior
- Stainless steel lids, hinged door and door latches
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter
- · Flexible compression door gaskets, ensures a tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 4" Heavy-duty plate casters (2 with locks)
- Cold wall milk coolers are designed to hold product temperature during service. Product should be removed at the end of service and moved to long-term, refrigerated storage

### **OPTIONS & ACCESSORIES**

- Corner bumpers
- Cafeteria tray slides
- Graphics

### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Maintains product temperature between 36°F to 40°F


















MODEL	SM58HC-W-02	
EXTERNAL DIMENSIONAL DATA		
Width Overall (in)	58"	
Depth Overall (in)	30 %"	
Height Overall with Casters (in)	41 ½"	
Number of Lids/Doors	Single Access	
Depth with Door Open 90° (in)	45 ½"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	22.63	
Internal Width Overall (in)	55"	
Internal Depth Overall (in)	27"	
Internal Height Overall (in)	25 ¾"	
CASE CAPACITY		
13" X 13" X 11"	16	
19" X 13" X 11"	10	
ELECTRICAL DATA		
Full Load Amperes	2.2	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	1434	
Heat Rejection (BTU/Hr)	2151	
Charge (lbs/grams)	0.165/75	
SHIPPING DATA		
Gross Weight	376 lbs	
Height - Crated	48"	
Width - Crated	61"	
Depth - Crated	34"	

**School Milk Cooler - Single Access** 

Model: SM58HC-W-02

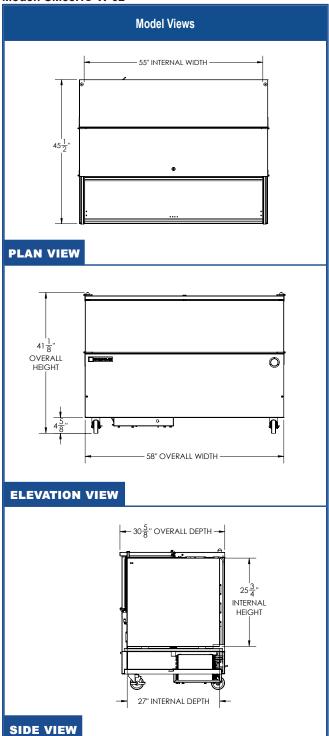

## **ELECTRICAL CONNECTION**



115/60/1 **NEMA 5-15P** 

Units pre-wired at factory and include 8' long cord and plug set.

