Project:	AIA#
Item:	
Location:	SIS#
Approved:	

SCHOOL MILK FORCED AIR COOLER

STF49HC Dual Access Cooler Hydrocarbon Series

MODELS: STF49HC-1-S STF49HC-1-W





OPTIONS & ACCESSORIES

- Stainless steel interior on white models -02
- Corner bumpers
- Graphics

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- · SS units: Stainless steel exterior and interior
- White units: White coated steel exterior. Interior features galvanized walls with stainless steel floor for maximum milk crate support
- Stainless steel lids, hinges doors and door latches
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 5" Heavy-duty plate casters (2 with locks)
- · Balanced, forced-air refrigeration system provides rapid chilling of product
- Maintains continuous milk temperature between 36° 38°F

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Epoxy coated evaporator coil




















MODEL	STF49HC (white & stainless steel models)		
EXTERNAL DIMENSIONAL DA			
Width Overall	49"		
Depth Overall	34"		
Height Overall with Casters	47 ³ ⁄ ₄ "		
Number of Lids/Doors	Dual Access		
Both Lids Extended	64"		
INTERNAL DIMENSIONAL DAT	NTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	20.55		
Internal Width Overall (in)	46"		
Internal Depth Overall (in)	30"		
Internal Height Usable (in)	24 5/8"		
CASE CAPACITY			
13" X 13" 11"	12		
19" X 13" 11"	8		
ELECTRICAL DATA			
Full Load Amperes	3.3		
REFRIGERATION DATA			
Horsepower	1/3		
Capacity (BTU/Hr)	2052		
SHIPPING DATA			
Gross Weight - Crated	334 lbs		
Height - Crated	54"		
Width - Crated	38"		
Depth - Crated	54"		

School Milk Cooler Model: STF49HC

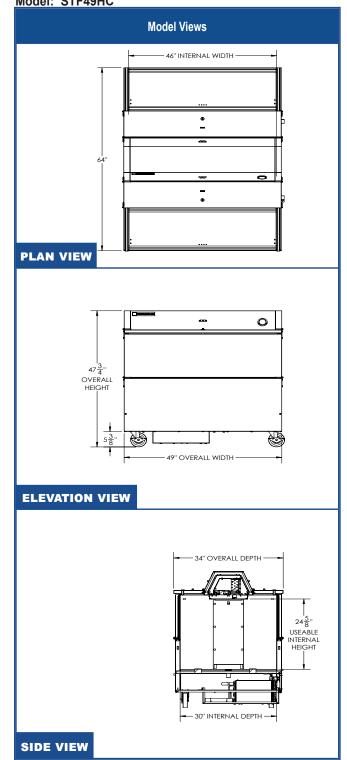

*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.



Project:	AIA#
Item:	
Location:	SIS#
Approved:	

SCHOOL MILK FORCED AIR COOLER

STF49HC Dual Access Cooler Hydrocarbon Series

MODELS: STF49HC-1-W-02

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- · White coated steel exterior
- Stainless steel interior
- · Stainless steel lids, hinges doors and door latches
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 5" Heavy-duty plate casters (2 with locks)
- · Balanced, forced-air refrigeration system provides rapid chilling of product
- Maintains continuous milk temperature between 36° 38°F

OPTIONS & ACCESSORIES

- Corner bumpers
- Graphics

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- · Epoxy coated evaporator coil




















MODEL	STF49HC-1-W-02	
EXTERNAL DIMENSIONAL DA	TA	
Width Overall	49"	
Depth Overall	34"	
Height Overall with Casters	47 ³ ⁄ ₄ "	
Number of Lids/Doors	Dual Access	
Both Lids Extended	64"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	20.55	
Internal Width Overall (in)	46"	
Internal Depth Overall (in)	30"	
Internal Height Usable (in)	25 %"	
CASE CAPACITY		
13" X 13" 11"	12	
19" X 13" 11"	8	
ELECTRICAL DATA		
Full Load Amperes	3.3	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2052	
SHIPPING DATA		
Gross Weight - Crated	334 lbs	
Height - Crated	54"	
Width - Crated	38"	
Depth - Crated	54"	

School Milk Cooler Model: STF49HC-1-W-02

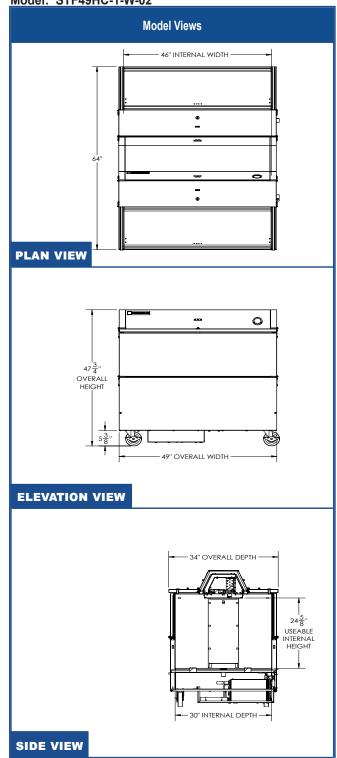

*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com