# **8000 Series Cartridges**

## **Application**

• CUNO Systems



#### **Product Features**

- SQC™ Sanitary Quick Change encapsulated design reduces contamination during changeouts and are disposable and incinerable.
- ◆ 1.3 gpm (4.9 lpm), 1.5 gpm (5.7 lpm) and 1.67 gpm (6.3 lpm) flow rates specifically designed to exceed water consumption on single application equipment.
- FDA CFR-21 and/or NSF compliant materials provides peace of mind that this product is suitable for potable applications.

CUNO's line of 8000 Series cartridges provide the continuing benefits of CUNO filtration in a user-friendly design. A choice of medias such as graded density carbon and granular activated carbon with micron ratings from 0.5 to 5, as well as optional integrated scale inhibition provide solutions for varying water conditions. The 8000 Series cartridges do not require activation for functionality, allowing an operator to change the cartridge in seconds.


## **Product Specifications**

Model Number	Part Number	Micron Rating	Chlorine Reduction Capacity	Additional Claims	Flow Rate
CFS8110	55720-01	5	N/A	Sediment Reduction	1.5 gpm (5.7 lpm)
CFS8112	55817-05	1	10,000 gal. (37,854 lit.)	Sediment Reduction	
CFS8812X	56011-01	0.5	9,000 gal. (34,069 lit.)	Cyst Reduction	
CFS8720	55893-03	5	4,800 gal. (18,170 lit.)	Sediment Reduction	
CFS8110-S	55720-03	5	N/A	Sediment Reduction, Scale Inhibition	
CFS8112-S	55817-08	1	10,000 gal. (37,854 lit.)	Scale Inhibition	
CFS8812X-S	56011-03	0.5	9,000 gal. (34,069 lit.)	Cyst Reduction, Scale Inhibition	
CFS8720-S	55893-01	5	4,800 gal. (18,170 lit.)	Sediment Reduction, Scale Inhibition	
CFS517LS	55584-01	5	3,500 gal. (13,249 lit.)	Sediment Reduction	1.3 gpm (4.9 lpm)
CFS8110EL	55720-05	5	N/A	Sediment Reduction	1.67 gpm (6.3 lpm)
CFS8112EL	55817-25	1	12,600 gal. (47,696 lit.)	Sediment Reduction	
CFS8812ELX	56011-05	0.5	14,000 gal. (52,996 lit.)	Cyst Reduction	
CFS8720EL	55893-06	5	5,500 gal. (20,820 lit.)	Sediment Reduction	
CFS8110-ELS	55720-07	5	N/A	Sediment Reduction, Scale Inhibition	
CFS8112-ELS	55817-27	1	12,600 gal. (47,696 lit.)	Sediment Reduction	
CFS8812ELX-S	56011-07	0.5	14,000 gal. (52,996 lit.)	Cyst Reduction, Scale Inhibition	
CFS8720-ELS	55893-08	5	5,500 gal. (20,820 lit.)	Sediment Reduction, Scale Inhibition	
CFS517	55600-01	5	3,500 gal. (13,249 lit.)	Scale Inhibition	1.3 gpm (4.9 lpm)
CFS8000-S	55854-01	N/A	N/A	Scale Inhibition	N/A
CFS8000-SK	55854-06	N/A	N/A	Scale Inhibition (Keyed Cartridge)	N/A



## **8000 Series Replacements**

Quantity	
Model Number	
Part Number	

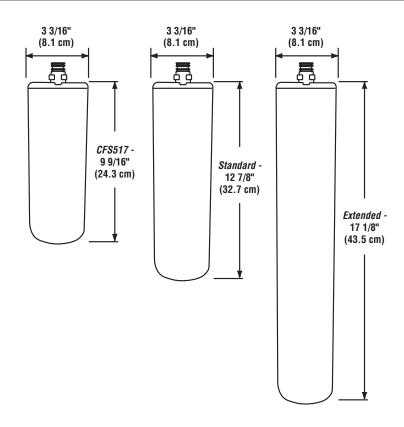

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. EPA Establishment Number 070595-CT-001.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold.

#### Service Worldwide

China

CUNO Filtration Shanghai Co. Ltd. No. 2 Plant East Side Xin Miao San Road XinQiao Town SongJiang District Shanghai, China 201612 Australia

CUNO Pacific Pty Ltd. 140 Sunnyholt Road Blacktown, N.S.W. 2148 Australia Europe

CUNO Limited 21 Woking Business Park Albert Drive Woking, Surrey GU21 5JY, England



Japan CUNO K.K.

Hodogaya Station Building 6F 1-7, Iwai-Cho, Hodogaya-Ku Yokohama 240-0023, Japan Brazil

CUNO Latina Ltda Rua AMF do Brazil - 251 18120 Mairingue-SP, Brazil Singapore

CUNO Filtration Asia Pte Ltd 18 Tuas Link 1 3rd Floor Singapore 638599 400 Research Parkway Meriden, CT 06450, USA

Toll Free: 1-888-218-CUNO Worldwide: 203-237-5541 Fax: 203-238-8701 www.cunofoodservice.com • www.cuno.com

© 2003 CUNO Incorporated

LITFS243 0603