

# 3 Door Stainless Reach-In Cooler



**BRR-71**

## Features

**Stainless Steel Interior and Exterior**  
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

**Bottom Mounted Compressor**  
Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

**Self Closing Locking Door(s)**  
Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

**Digital Temperature Controls**  
The LCD display allows for temperature control and easy visual read out.

**9 Adjustable Interior Shelves**  
The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

**6 Casters**  
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Models	Doors	#of Shelves	Compressor (H/P)	Voltage (V/Hz/Ph)	Gross Weight	Exterior Dims (Ins)
BRR-71	3	9	1/2	115/60/1	617lbs	82" x 31.75" x 83.25"



# Technical Data Plan View

## Dimensions

Exterior Dimensions (Inches)	82" x 31.75" x 83.25"
Interior Dimensions (Inches)	77" x 27" x 58"
Packaging Dimensions (Inches)	83.7" x 33.1" x 86.5"
Capacity (cu. ft.)	71 cu. ft.
Gross Weight (lbs)	617 lbs

## Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	3
# of Shelves	9
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

## Cooling


Temperature Range	33° - 40° F
Refrigerant	R290
Refrigerant Amount (oz)	19.7
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1/2

## Electrical


Voltage (v/Hz)	115/60
Power (W)	650
Power Consumption (kw/24hr)	3.4
Phase	1

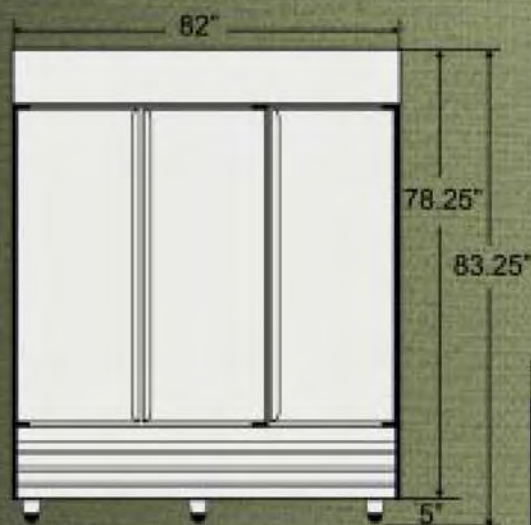

Front View

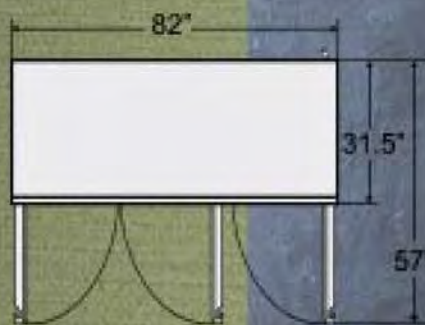

Top View

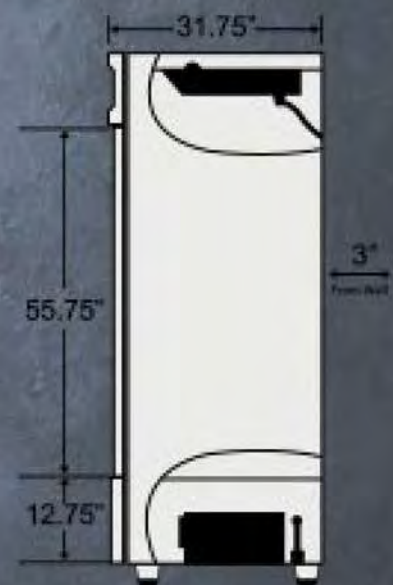

Side View



NEMA 5-15P

