

## S-Series Dunnage Racks

### Solid Top

Models DRS30, DRS36, DRS48, DRS60

### Slotted Top

Models DRS300, DRS360, DRS480, DRS600

#### Features & Benefits



- Conveniently and safely store heavy bulk foods, liquids, dairy products, dry goods, paper products, or clean equipment 12" (30 cm) off the floor.
- Storage height is double the required 6" (15 cm) enforced by most regional food safety and/or HACCP programs.
- Use in receiving dock area to keep clean food storage boxes safely off the ground while transferring bulk produce and other food products out of cartons and into storage boxes.
- New Speckled Gray (480) color matches perfectly with Camshelving™ for a clean, consistent look from the freezer to the cooler to dry storage area.
- Load capacity:
  - Models DRS30, DRS36, DRS300, DRS360 - 1500 lbs. (680 kg.)
  - Models DRS48, DRS60, DRS480, DRS600 - 3000 lbs. (1,360 kg.)
- One piece, seamless, heavy-duty polypropylene ensures long lasting durability and superior equipment performance. Single wall structure provides added strength and stability.
- Smooth surface is easy to clean and will not rust, chip, dent or corrode. Open ends and sides provide easy access for cleaning floor areas underneath.
- Available with solid ribbed tops or slotted tops.
- Slotted tops recommended for use in coolers and freezers to ensure extra cold air circulation around perishable products for optimum freshness and quality.
- One Camlink® connector is included to securely lock racks together for a more stable storage system.
- No assembly required.
- Available in 2 colors.

Item No. \_\_\_\_\_


Specifier Identification No. \_\_\_\_\_

Model No. \_\_\_\_\_

Quantity \_\_\_\_\_



S-Series Solid Top Dunnage Racks

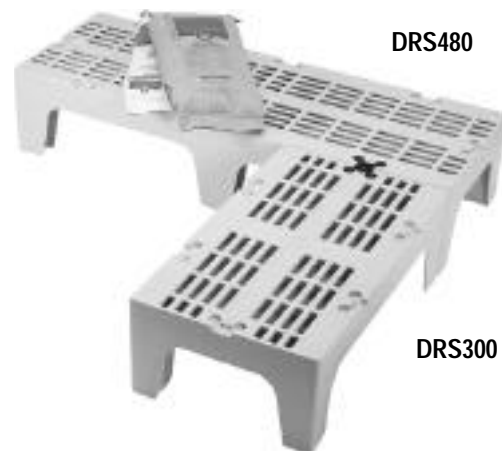

S-Series Slotted Top Dunnage Racks



**Camlink®**  
Securely connects S-Series  
Dunnage Racks together.

#### Approvals



# S-Series Dunnage Racks

Item No. \_\_\_\_\_

## Solid Top

Models DRS30, DRS36, DRS48, DRS60


Specifier Identification No. \_\_\_\_\_

## Slotted Top

Models DRS300, DRS360, DRS480, DRS600

Model No. \_\_\_\_\_

Quantity \_\_\_\_\_

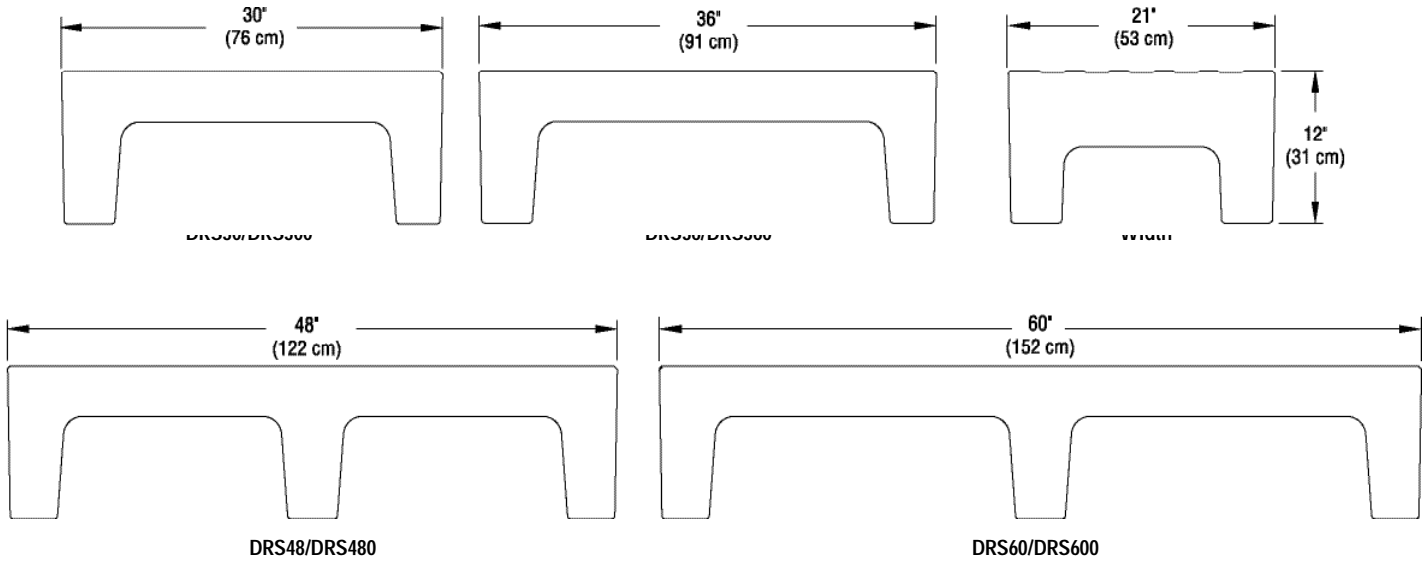

## Specifications

Dimension Tolerance: +/- 1/4" (0,64 cm)

| Code             | Load Capacity         | Dimensions L x W x H               | Case lbs./cube Kg/m <sup>3</sup> | Code               | Load Capacity         | Dimensions L x W x H               | Case lbs./cube Kg/m <sup>3</sup> |
|------------------|-----------------------|------------------------------------|----------------------------------|--------------------|-----------------------|------------------------------------|----------------------------------|
| <b>Solid Top</b> |                       |                                    |                                  | <b>Slotted Top</b> |                       |                                    |                                  |
| DRS30            | 1500 lbs. (680 Kg.)   | 30" x 21" x 12" (76 x 53 x 31 cm)  | 19 (4.78)<br>9 (0,13)            | DRS300             | 1500 lbs. (680 Kg.)   | 30" x 21" x 12" (76 x 53 x 31 cm)  | 19 (4.78)<br>9 (0,13)            |
| DRS36            | 1500 lbs. (680 Kg.)   | 36" x 21" x 12" (91 x 53 x 31 cm)  | 21 (5.72)<br>9,5 (0,16)          | DRS360             | 1500 lbs. (680 Kg.)   | 36" x 21" x 12" (91 x 53 x 31 cm)  | 20 (5.72)<br>9 (0,16)            |
| DRS48            | 3000 lbs. (1,360 Kg.) | 48" x 21" x 12" (122 x 53 x 31 cm) | 28 (7.77)<br>13 (0,22)           | DRS480             | 3000 lbs. (1,360 Kg.) | 48" x 21" x 12" (122 x 53 x 31 cm) | 26.5 (7.77)<br>12 (0,22)         |
| DRS60            | 3000 lbs. (1,360 Kg.) | 60" x 21" x 12" (152 x 53 x 31 cm) | 35 (9.72)<br>16 (0,27)           | DRS600             | 3000 lbs. (1,360 Kg.) | 60" x 21" x 12" (152 x 53 x 31 cm) | 34 (9.72)<br>15,5 (0,27)         |

## Optional Accessories

Camlink® Connector  DRLNK Black (110)  
(1 included with each S-Series Dunnage Rack)

## Standard Colors

Dark Brown (131)  Speckled Gray (480)

## Architect Specs

The S-Series Dunnage Racks shall be Cambro Models..., manufactured by Cambro Mfg. Co., Huntington Beach, CA 92648 U.S.A. Each unit shall be constructed of one-piece, seamless, heavy-duty molded polypropylene and shall be available with solid ribbed tops or slotted tops. Unit load capacity shall range from 1500 - 3000 lbs. (680 -1,360 Kg.). The top of each unit shall be 12" (30 cm) from the floor. Units will not rust or corrode. Each unit shall come with one Camlink® connector to securely lock racks together. It shall require no assembly and shall be available in 2 colors.

## Approvals



© 2002 Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056-U.S.A.  
Telephone (1)714 848 1555 Toll Free 800 854 7631 Customer Service Hot Line 800 833 3003

Printed in USA