

CAMBRO®

Ultra Pan Carrier® and Ultra Camcart® H-Series

Front Loading

Ultra Pan Carrier Models

UPCH400, UPCH4002, UPCHW400, UPCHW4002, UPCHD400, UPCHD4002

Ultra Camcart Models

UPCH800, UPCH8002, UPCHT800, UPCHT8002, UPCHTD800, UPCHTD8002, UPCHBD800, UPCHBD8002



Features & Benefits

- Perfect for frequent opening and closing, extreme cold ambient temperatures and longer events, Hot Holding Ultra Pan Carriers and Ultra Camcarts extend hot food holding time and ensure food safety—an economical alternative to large warming cabinets.
- Versatile transporters hold a wide variety of food types and textures.
- Perfect for transporting hot food to off-premise events, corporate parties or delivering food from central kitchens to satellite locations.
- With durable construction and reliable holding performance, they provide an exact fit for a wide variety of GN full, ½ and ⅓-size food pans and ½-size sheet pans.
- Gentle, 150°–165°F (65,6°–73,9°C) heat provides the ideal temperature range for keeping food safe and hot while maintaining moisture and preventing further, unintended cooking.
- For best holding results, preheat for 45 minutes from room temperature.
- Enables HACCP compliance by maintaining safe, hot food temperatures.
- Recovers temperature in 3 minutes after the door is opened and closed.
- Tough, polyethylene exterior stays cool to the touch.
- Foamed-in polyurethane insulation will hold temperature above 148°F (65°C) for over 4 hours when used unplugged.
- Vent cap equalizes pressure and releases steam.
- 9" (23 cm) nylon latch opens and closes easily, secures tightly and will not bend.
- Ergonomically placed, molded-in handles won't break off.
- UPCH400 is stackable with both UPCS400 and UPC400 for convenient transportation and space-saving storage.
- Twelve, evenly-spaced, molded-in rail sets per compartment (1 compartment in UPCH400 and 2 in UPCH800) accommodate varying pan depths and maximize capacity.
- Transport UPCH400 on casters or CD400 Camdolly®.
- Hot Holding Ultra Camcart UPCH800 comes equipped with casters.
- Removable, 9' (2,7 m) power cord can also be wrapped and secured for transport with vinyl cord strap on left side of unit.
- Indicator light shows when power is on.
- Thermometer located inside door may be removed easily for cleaning.
- Dishwasher safe (without heating element or thermometer).
- Electrical.
- Uses less energy than three 100 watt light bulbs.
- UPCH400 and UPCH800 require no assembly. Non-electric UPC400 and UPC800 models may be retrofitted with heated door with minimal assembly.
- Available in 5 colors.
- Available in 110 volt and 220 volt models.

Item No. _____

Specifier Identification No. _____

Model No. _____

Quantity _____



UPCH800



UPCH400



Cord Storage



Heating Unit

Approvals



CAMBRO®
TRUSTED FOR GENERATIONS™
www.cambro.com

© 2010 Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, CA 92647-2056, U.S.A.

Telephone 714 848 1555

Toll Free 800 854 7631

Customer Service Department 800 833 3003

Printed in USA

Central Restaurant Products

Ultra Pan Carrier® and Ultra Camcart® H-Series


Front Loading

Ultra Pan Carrier Models

UPCH400, UPCH4002, UPCHW400, UPCHW4002, UPCHD400, UPCHD4002

Ultra Camcart Models

UPCH800, UPCH8002, UPCHT800, UPCHT8002, UPCHTD800, UPCHTD8002, UPCHBD800, UPCHBD8002

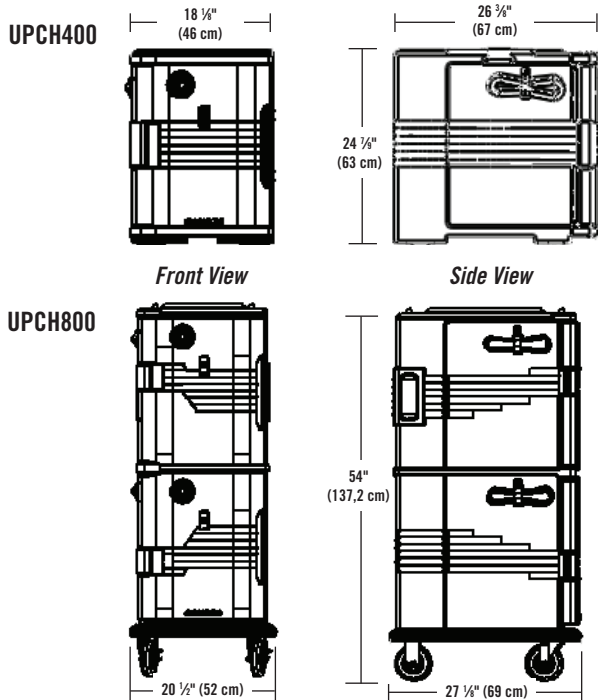

Item No. _____

Specifier Identification No. _____

Model No. _____

Quantity _____

HOT HOLDING	150°–165°F (65°–74°C)
WARM UP TIME (from ambient to temperature)	45 minutes
RECOVERY TIME* (time to recover to temperature after door is held open for 30 seconds)	3 minutes
TRANSPORT TIME* (after reaching temperature, amount of time unit can be held passively/ unplugged until contents reach 148°F (65°C).)	4 hours+

* Based on test with 4 full-sized, 4" (10 cm) deep H-Pans™ filled with 190°F (87,7°C) hot water.

Model	UPCH400 / UPCH800 (110 VAC models)	UPCH400 / UPCH800 (220 VAC models)
Electrical Specifications		
Required Voltage	110 - 120 VAC	200 - 230 VAC
Maximum Amp.	2.0a	1.2a
Watts	230w	265w
Hertz	50/60	50/60
Plug Type	Nema 5-15P	Euro plug, CEE7
Cord Connector / Inlet	C15 / C16	C15 / C16
Power Cord Length	9 feet	2,7 m
Capacity	UPCH400	UPCH800
2 1/2" (6,5 cm) Deep Food Pan	6	12
4" (10 cm) Deep Food Pan	4	8
6" (15 cm) Deep Food Pan	3	6
8" (20 cm) Deep Food Pan	2	4

PRODUCT CODE	DESCRIPTION	EXTERIOR DIMENSIONS W x D x H	COMPARTMENT DIMENSIONS W x D x H	CASE LB (CUBE) CASE KG (M³)
1-Compartment Hot Holding Ultra Pan Carriers				
UPCH400	Heated Ultra Pan Carrier, 110V	18 1/8" x 26 3/8" x 24 7/8"	13 1/8" x 21" x 19 1/8"	45 (7.96)
UPCH4002	Heated Ultra Pan Carrier, 220V	46 x 67 x 63 cm	33,5 x 53,3 x 48,6 cm	20,45 (0,225)
UPCHW400	Heated Ultra Pan Carrier w/Casters, 110V	18 1/8" x 26 3/8" x 31 1/4"	13 1/8" x 21" x 19 1/8"	54 (9.98)
UPCHW4002	Heated Ultra Pan Carrier w/Casters, 220V	46 x 67 x 79,4 cm	33,5 x 53,3 x 48,6 cm	24,55 (0,283)
UPCHD400*	Heated UPCH400 Replacement/UPC400 Retrofit Door, 110V	18 1/8" x 3 1/2" x 21"	–	13 (0.93)
UPCHD4002*	Heated UPCH400 Replacement/UPC400Retrofit Door, 220V	46 x 9 x 53,3 cm	–	5,91 (0,026)
CD400	Camdolly®	20 3/4" x 27 3/8" x 9"	–	16 (3.21)
		53 x 70 x 23 cm	–	7,3 (0,09)
400STP	Strap	200" long	–	1/2 (–)
		5 m long	–	0,5 (–)
2-Compartment Hot Holding Ultra Camcarts				
UPCH800	Heated Ultra Camcart, 110V	20 1/2" x 27 1/8" x 54"	13" x 21 1/2" x 19 1/8"	102 (19.89)
UPCH8002	Heated Ultra Camcart, 220V	52 x 69 x 137,2 cm	33 x 54,5 x 48,5 cm	43,36 (0,563)
UPCHT800	Ultra Camcart with Heated Top Door Only, 110V	20 1/2" x 27 1/8" x 54"	13" x 21 1/2" x 19 1/8"	96 (19.89)
UPCHT8002	Ultra Camcart with Heated Top Door Only, 220V	52 x 69 x 137,2 cm	33 x 54,5 x 48,5 cm	43,64 (0,563)
UPCHTD800*	Heated UPCH800 Replacement/UPC800 Retrofit Top Door, 110V	18 1/8" x 3 1/2" x 21"	–	13 (0.93)
UPCHTD8002*	Heated UPCH800 Replacement/UPC800 Retrofit Top Door, 220V	46 x 9 x 53,3 cm	–	5,91 (0,026)
UPCHBD800*	Heated UPCH800 Replacement/UPC800 Retrofit Bottom Door, 110V	18 1/8" x 3 1/2" x 21"	–	13 (0.93)
UPCHBD8002*	Heated UPCH800 Replacement/UPC800 Retrofit Bottom Door, 220V	46 x 9 x 53,3 cm	–	5,91 (0,026)

UPCH Case Pack: 1. CD400 Colors: Coffee Beige (157), Dark Brown (131), Black (110), Slate Blue (401), Gray (180). **CD400 Case Pack:** 1

Casters: 5" (12,7 cm) – 2 fixed, 2 swivel, 1 with brake. * **NOTE:** UPCH400, UPCH800 top and UPCH800 bottom replacement/retrofit doors are not interchangeable.

Architect Specs

The electrical food service and transport front loading insulated transporter shall be an Ultra Pan Carrier, Model UPCH400... or Ultra Camcart UPCH800... manufactured by Cambro Mfg. Co., Huntington Beach, CA 92647 USA. It shall be made of polyethylene and foam-injected polyurethane. It shall have a non-corrosive heating unit built into its door and a 9' (2,7 m) removable power cord. It shall have a power indicator light on the front and maintain temperature of 150°–165°F (65°–74°C). It shall have a vinyl cord-storage strap on its left side. It shall have a black pop-up vent to help equalize pressure and release steam. It shall have a removable gasket. It shall have 12 sets of evenly-spaced, molded-in rails per compartment and transport GN full size, 1/2 and 1/3-size food pans and 1/2-size sheet pans. It shall have a durable nylon door latch and the compartment door shall swing open 240° to the side. It shall have ergonomic molded-in handles located on each of the sides. It shall be available in 5 colors.

UPCH Colors

Granite Gray (191)	Granite Green (192)	Slate Blue (401)
Dark Brown (131)	Black (110)	

Approvals



CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

© 2010 Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, CA 92647-2056, U.S.A.
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service Department 800 833 3003

Printed in USA

Central Restaurant Products

D021002 UPCH400 800 CS.indd