

CAMBRO®

Camshelving® High Density Mobile Units

Mobile - Starter Units with High Density Casters with Camguard™ antimicrobial

4 Shelf Units - Solid or Vented Plates

2 Post Heights

67" (170,2 cm) and 75" (190,5 cm)

1 Shelf Width

24" (61 cm)

3 Shelf Lengths


36" (91,4 cm), 42" (106,7 cm), 48" (121,9 cm)

High Density Mobile Unit Includes:

- Two Post Kits for Mobile Units
- Four Shelf Kits
- Four High Density Casters



High Density Caster

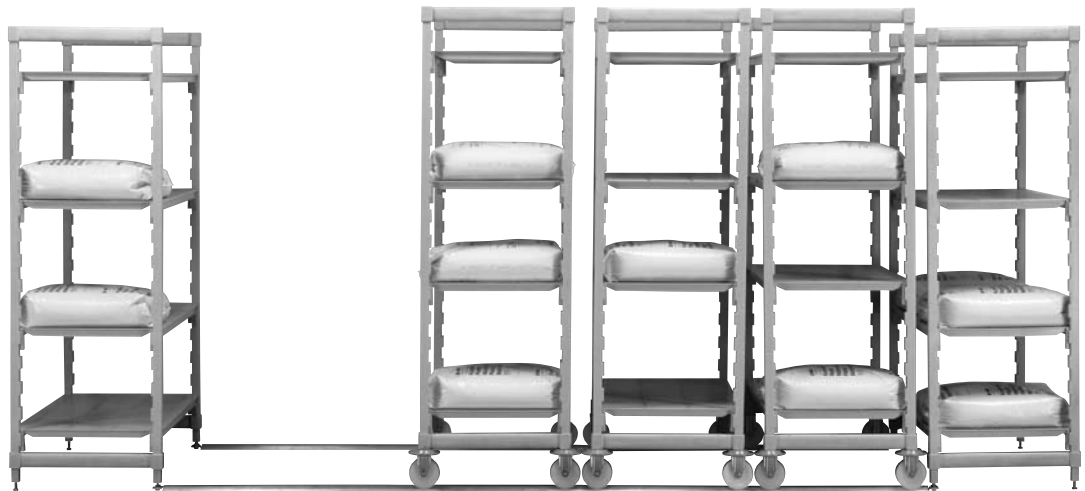

Features & Benefits

Increases Storage Capacity

Maximize storage capacity by eliminating aisles and utilizing all available space. Ideal for operations with limited space or that need to use their space more efficiently. Floor track system provides safe and easy access to stored product. Heavy weight loads roll securely on raised floor track.

Easy to Clean

Camshelving shelf plates contain Camguard antimicrobial, a silver-ion technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation. Camguard is incorporated throughout the shelf plate material so that it will never wash off or wear out. The shelf plates remove easily and can be placed in an open end Camrack® (OETR314) for washing. The traverses and post kits are smooth polypropylene so they can be wiped or steam cleaned. The traverses can be easily removed and washed in a conveyor dishwasher.

Easy to Assemble

Assembles in minutes with the use of a rubber mallet. Requires no bolts or nuts, clips or stainless steel connectors. Molded in dovetails on posts ensure that traverses set easily into place.

Strong as Steel

Posts and traverses are made of a steel core coated with polypropylene. Uniquely engineered post connectors offer exceptional cross stabilization. Casters are made of reinforced nylon. Maximum weight-bearing capacity of 750 pounds (340 Kg) per mobile unit

Item No. _____

Specifier Identification No. _____

Model No. _____

Quantity _____

Easy to Adjust

Requires use of rubber mallet. Shelves can be adjusted at 4" (10,2 cm) increments. Add a shelf to an existing unit by simply ordering the appropriate Shelf Kit.

Optional Accessories

Place the High Density Donut Bumper over the top of the High Density Caster before placing the caster in the post. Protects the casters and posts of adjacent High Density Mobile Units.

Approvals



Components

CAMBRO®
www.cambro.com

© 2009 Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, CA 92647-2056, U.S.A.
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003

Camshelving® High Density Mobile Units

Mobile - Starter Units with High Density Casters with Camguard™ antimicrobial


4 Shelf Units - Solid or Vented Plates

High Density Mobile Unit Includes:

- Two Post Kits for Mobile Units
- Four Shelf Kits
- Four High Density Casters

FOUR SHELF MOBILE UNIT

for High Density Storage System includes two post kits for mobile units, four vented or solid shelf kits, and four high density casters.

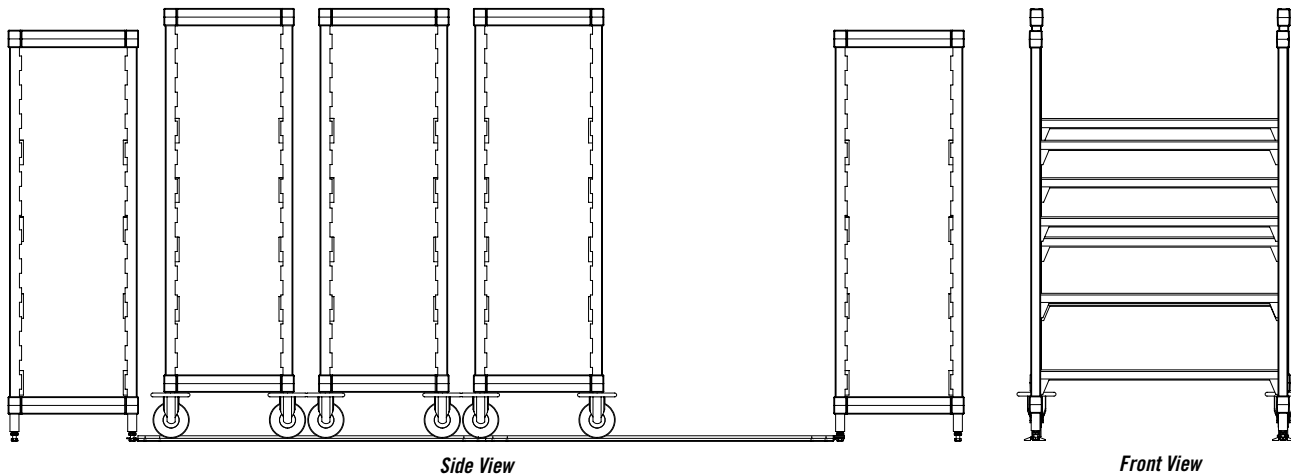

SPECIFICATIONS

Code	Description	Size (W X L X H Inch) Size (W X L X H cm)	Case lbs./cube Kg./m ³
High Density Mobile Starter Units with Vented Shelves			
CSUHD44486	Mobile Unit 4 Vented Shelves	24" x 48" x 67" 60,96 x 121,92 x 170,18 cm	113.00 (8.27) 51,36 (0,234)
CSUHD44487	Mobile Unit 4 Vented Shelves	24" x 48" x 75" 60,96 x 121,92 x 190,5 cm	108.00 (8.27) 49,09 (0,234)
CSUHD44427	Mobile Unit 4 Vented Shelves	24" x 42" x 75" 60,96 x 106,68 x 190,5 cm	107.74 (8.27) 48,97 (0,234)
CSUHD44367	Mobile Unit 4 Vented Shelves	24" x 36" x 75" 60,96 x 91,44 x 190,5 cm	98.94 (8.27) 44,97 (0,234)

High Density Mobile Starter Units with Solid Shelves

CSUHD44486S	Mobile Unit 4 Solid Shelves	24" x 48" x 67" 60,96 x 121,92 x 170,18 cm	116.04 (8.27) 52,63 (0,234)
CSUHD44487S	Mobile Unit 4 Solid Shelves	24" x 48" x 75" 60,96 x 121,92 x 190,5 cm	111.04 (8.27) 50,37 (0,234)
CSUHD44427S	Mobile Unit 4 Solid Shelves	24" x 42" x 75" 60,96 x 106,68 x 190,5 cm	114.82 (8.27) 52,08 (0,234)
CSUHD44367S	Mobile Unit 4 Solid Shelves	24" x 36" x 75" 60,96 x 91,44 x 170,18 cm	105.62 (8.27) 47,91 (0,234)

Architect Specs

Posts:	Internal steel core, reinforced polypropylene exterior.
Post Connectors:	Reinforced polypropylene.
Traverses:	Internal steel core, reinforced polypropylene exterior.
Vented/Solid Shelf Plates:	Reinforced polypropylene with Camguard™ antimicrobial.
High Density Caster:	Polyolefin resin with zinc plated post.

Code	Description	Case Pack	Case lbs./cube Kg./m ³
Accessories			
CSHDDB	High Density Donut Bumper	4	2.01 (0.05) 0,91 (0,001)
CSHDC	High Density Caster	2	1.92 (0.174) 0,873 (0,005)

Standard Color: Speckled Gray (480)

Approvals



Components

CAMBRO
www.cambro.com

© 2009 Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, CA 92647-2056, U.S.A.
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003