

Project #:			
Item #:			



Model RCS10TS shown

Medium Volume This category of microwave is ideal for...

Applications:

- Pizza restaurants
- Casual dining
- Clubs
- Deli

Defrost:

- Defrosts most frozen food products

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

Medium Volume

Amana Commercial Microwave Model RCS10TS

Power Output

- 1000 watts of power.
- Five power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.

Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option for easy one-touch cooking.
- Multiple quantity pad calculates the proper cooking times for multiple portions.
- User friendly touch controls are easy to use.
- Time entry option for added flexibility.
- Digital display with countdown timer for simple operation and "at-a-glance" monitoring.
- Braille touch pads are ADA compliant.
- See-through door and lighted interior for monitoring without opening the door.
- 1.2 cubic ft. (.034m³) capacity accommodates a 14" (356 mm) platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

Easy to Maintain


- Stainless steel exterior and interior for easy cleaning and a professional look.
- Non-removable air filter protects oven components.
- Constructed to withstand the foodservice environment.
- Limited 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- UL and ETL Listed.







Amana Commercial Microwave Model RCS10TS | Medium Volume

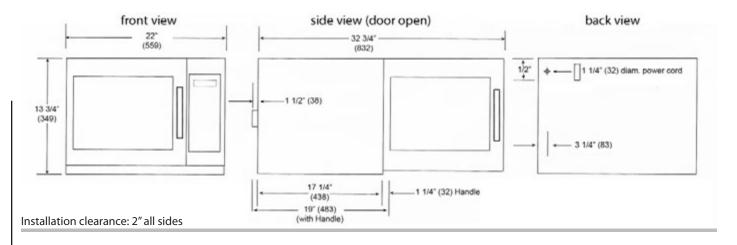

Specifications			
Model	RCS10TS UPC Code 72802802072	24	
Configuration	Countertop		
Control System	Touch		
Programmable Control	10		
Settings Programmable	100		
Max. Cooking Time	60:00		
Power Levels	5		
Defrost	Yes		
Time Entry Option	Yes		
Microwave Distribution	Rotating antenna, top		
Magnetron(s)	1		
Display	LED		
Stackable	Yes		
Stage Cooking	Yes, 4		
Interior Light	Yes		
Door Handle	Grab & Go		
Signal	End of cycle, adjustable		
Air Filter	Non-removable with cleaning reminder		
Multiple Portion Setting	Yes, X2		
Exterior Dimensions	H 13¾" (349.25) W 22" (558.8) D*19" (4		
Cavity Dimensions	H 8½" (216) W 14½" (368.3) D 15" (38	31)	
Door Depth	34" (864 mm), 90°+ door open		
Usable Cavity Space	1.2 cubic ft. (.034 m³)		
Exterior Finish	Stainless steel		
Interior Finish	Stainless steel		
D C .:	Stall liess steel		
Power Consumption	1550 W, 13 A		
Power Consumption Power Output**	1550 W, 13 A 1000 W** Microwave		
	1550 W, 13 A		
Power Output**	1550 W, 13 A 1000 W** Microwave)	
Power Output** Power Source	1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase)	
Power Output** Power Source Plug Configuration / Cord	1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase NEMA 5-15 5 ft. (1.5m))	
Power Output** Power Source Plug Configuration / Cord Frequency Product Weight Ship weight (approx.)	1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase NEMA 5-15 5 ft. (1.5m))	
Power Output** Power Source Plug Configuration / Cord Frequency Product Weight Ship weight (approx.) UPS Shippable	1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase NEMA 5-15 5 ft. (1.5m) (11) 2450 MHz 41 lbs. (18.6 kg.) 48 lbs. (21.8 kg.) Yes		
Power Output** Power Source Plug Configuration / Cord Frequency Product Weight Ship weight (approx.)	1550 W, 13 A 1000 W** Microwave 120V, 60 Hz, 15 A single phase NEMA 5-15 5 ft. (1.5m) (11) 2450 MHz 41 lbs. (18.6 kg.) 48 lbs. (21.8 kg.)		

Measurements in () are millimeters

- * Includes handle
- ** IEC 705 Tested

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items with two multiple portions. Touch pad shall include Braille for ADA compliance. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 5 power levels, including defrost and 4 cooking stages. Microwave output shall be 1000 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.2 cubic ft. (.034 m³) cavity shall accommodate a 14" (356 mm) platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Front air filter shall be permanently affixed to the front off the oven and have a clean filter reminder. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, UL for safety and ETL for sanitation.



Warranty

Limited 3 year warranty:

Year 1 - parts, labor, and travel are covered.

Years 2 - 3 - magnetron tube (part only) is covered.

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.





Product of the U.S.A.

Printed in the U.S.A.