



GLO-RAY® HEATED SHELVES

Models GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

The Hatco Glo-Ray® Heated Shelf has an extruded aluminum base with non-slip rubber feet, stainless steel top, and blanket-type element for uniform heat distribution. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature.

FLEXIBILITY

Ideal for pass-through areas, buffet lines, or as a heated work shelf.

Model GRS features a rocker switch with indicator light and an adjustable thermostat ranging from 80° to 200°F (27° to 93°C). Surface-mounted blanket-type elements distribute heat under the entire stainless steel surface. All models are shipped factory assembled and include a 6' (1829 mm) cord and plug attached, ready to use.

QUALITY

The following features assure the finest performance for years to come:


- Models feature a thermostatically-controlled heated base to extend the holding times of most food.
- Available in widths from 18" to 72" (457-1829 mm) and depths from 6" to 25.5" (152-648 mm).
- Extruded aluminum base with stainless steel top – hardcoated aluminum surface is optional for the 19.5" (495 mm), 15.5" (394 mm), 21.5" (546 mm), and 23.5" (597mm) deep models
- Optional *Designer* colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper



Model GRS-60-I



Model GRS-36-I with accessory pan rail and food pans

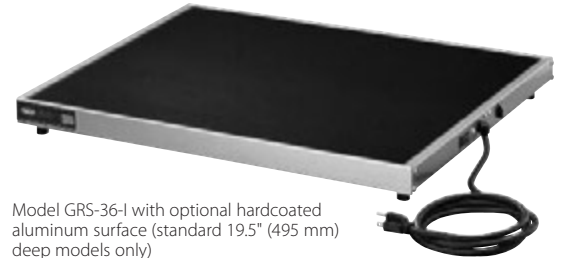

Model GRS-36-I with optional hardcoated aluminum surface (standard 19.5" (495 mm) deep models only)



Model GRS-30-I with optional *Designer* color and accessory food pans

Find this product at:

Central
RESTAURANT PRODUCTS

1-866-285-1252

BLANKET ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR ONE YEAR.



HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com


Form No. GRS Spec Sheet

Printed in U.S.A.
January 2012



GLO-RAY® HEATED SHELVES

Models GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

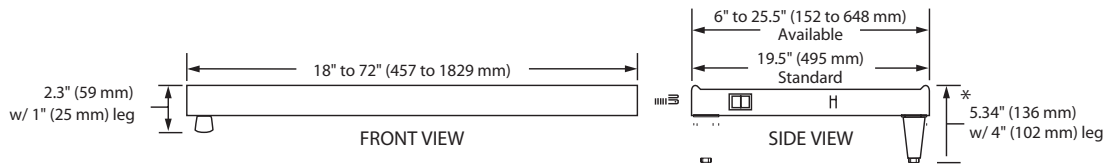

SPECIFICATIONS FOR STANDARD 19.5 (495 mm) DEPTH

| Model | Watts | Width | Shipping Weight |
|-----------|-------|---------------|-----------------|
| GRS-18-I | 250 | 18" (457 mm) | 16 lbs. (7 kg) |
| GRS-24-I | 350 | 24" (610 mm) | 20 lbs. (9 kg) |
| GRS-30-I* | 450 | 30" (762 mm) | 25 lbs. (11 kg) |
| GRS-36-I | 550 | 36" (914 mm) | 28 lbs. (13 kg) |
| GRS-42-I† | 600 | 42" (1067 mm) | 32 lbs. (15 kg) |
| GRS-48-I† | 700 | 48" (1219 mm) | 36 lbs. (16 kg) |
| GRS-54-I† | 800 | 54" (1372 mm) | 42 lbs. (19 kg) |
| GRS-60-I† | 900 | 60" (1524 mm) | 44 lbs. (20 kg) |
| GRS-66-I† | 1000 | 66" (1676 mm) | 50 lbs. (23 kg) |
| GRS-72-I† | 1100 | 72" (1829 mm) | 56 lbs. (25 kg) |

* Indicates models that accommodate multiple food pans: 30" (762 mm) = 2 pans, 42" (1067 mm) = 3 pans, 54" (1372 mm) = 4 pans, and 66" (1676 mm) = 5 pans.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

DIMENSIONS

GRS (Standard Depth): Model shown is 18"-72"W x 19.5"D x 2.3"H* (457-1829 x 495 x 59 mm).

* Add 3" (76 mm) to height when using 4" (102 mm) legs.

VOLTAGE

120 volts, single phase only, (uses NEMA 5-15P).
Export voltages available.

CORD LOCATION

Is on the same end as the switch

PLUG CONFIGURATIONS



GRS Models are available in depths of:

| Model | Depths | Model | Depths |
|-------|-----------------|-------|-----------------|
| A | 6" (152 mm) | G | 15.75" (400 mm) |
| B | 7.75" (197 mm) | H | 17.5" (445 mm) |
| C | 9.75" (248 mm) | I | 19.5" (495 mm) |
| D | 12" (305 mm) | J | 21.5" (546 mm) |
| E | 13.75" (349 mm) | K | 23.5" (597 mm) |
| F | 15.5" (394 mm) | L | 25.5" (648 mm) |

WATTS

| Model | A | B | C | D | E | F | G | H | I | J | K | L |
|------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| GRS-18-(X) | 100 | 100 | 125 | 200 | 200 | 200 | 225 | 225 | 250 | 300 | 325 | 350 |
| GRS-24-(X) | 125 | 125 | 175 | 250 | 250 | 250 | 300 | 300 | 350 | 375 | 425 | 475 |
| GRS-30-(X) | 150 | 150 | 225 | 300 | 300 | 300 | 375 | 375 | 450 | 450 | 525 | 600 |
| GRS-36-(X) | 175 | 175 | 275 | 350 | 350 | 350 | 450 | 450 | 550 | 525 | 625 | 725 |
| GRS-42-(X) | 225 | 225 | 300 | 450 | 450 | 450 | 525 | 525 | 600 | 675 | 750 | 825 |
| GRS-48-(X) | 250 | 250 | 350 | 500 | 500 | 500 | 600 | 600 | 700 | 750 | 850 | 950 |
| GRS-54-(X) | 275 | 275 | 400 | 550 | 550 | 550 | 675 | 675 | 800 | 825 | 950 | 1075 |
| GRS-60-(X) | 300 | 300 | 450 | 600 | 600 | 600 | 750 | 750 | 900 | 900 | 1050 | 1200 |
| GRS-66-(X) | 325 | 325 | 500 | 650 | 650 | 650 | 825 | 825 | 1000 | 975 | 1150 | 1325 |
| GRS-72-(X) | 350 | 350 | 550 | 700 | 700 | 700 | 900 | 900 | 1100 | 1050 | 1250 | 1450 |

OPTIONS (NOT FOR RETROFIT)

- Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, and Antique Copper
- Hardcoated Surface for 15.5" (394 mm), 19.5" (495 mm), 21.5" (546 mm), or 23.5" (597mm) depth models only

ACCESSORIES

- 4" (102 mm) Adjustable Legs (Standard on units over 36" (914 mm) in width)
- Slant Leg Kit (Models 12" (305 mm) deep or deeper)
- Pan Rail (19.5" (495 mm) deep models only)

PRODUCT SPECS

Heated Shelf

The Heated Shelf shall be a Glo-Ray® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (U.S. and Canada only), the Shelf shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall

width. It shall consist of a thermostatically-controlled heated base and a cord with plug attached.

Accessories shall include 4" (102 mm) adjustable legs, slant leg kit, and pan rail.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com