

AMERICAN RANGE

Chef Inspired, Professional Cooking Equipment

Culinary Series

AF50/25 HEAVY DUTY FRYER

STANDARD FEATURES

- All stainless steel high quality construction.
- S/S durable double layer access door.
- 304 S/S frypots for long life.
- Millivolt control system, no electrical hook up required.
- Thermostatic control adjusts from 200°F to 400°F.
- 100% gas shut off valve when temperature reaches the hi-limit.
- 3/4" NPT gas inlet
- Chrome plated catch rack under the fry baskets.
- Twin chrome plated fryer baskets with cool grip plastic coated handles for safety & ease.
- 6" high chrome plated adjustable legs.
- Regulator with built-in gas valve.
- Deflector/baffles absorb and diffuse heat to tube walls.
- High efficiency cast iron burners, highest **Power-Plus** BTU in the industry, for fast recovery time. 5 Burners, **Power-Plus** 40,000 BTU each/**Power-Plus** 200,000 BTU total
- Combination gas valve includes built in pressure regulator, and pilot ignition system, hermetically sealed for operating stability.
- High-Limit Safety Switch Standard
- Two year limited warranty, parts and labor.

GAS TYPE: NATURAL LP



Model Shown AF-50/25
Comes with optional casters

Power-Plus
5 each 40,000 BTU's/hr
Burners (total 200,000 BTU's)

You get a faster and better fryer The **Culinary Series** by American Range, with the latest technology incorporated into its design, and tons of features and benefits to suit the everyday demanding needs especially during extreme operating periods. Bringing added value and assured performance, by offering the highest **Power-Plus** BTU rating for superior recovery. The ample "cool zone" prevents food particles from carbonization while extending oil life. Our unique vessel tank design features a deeper oil level, for larger food products, and a sloping vessel bottom for quick and complete draining of oil and debris.


Its special design tube shields provide a uniform heating pattern for positive, more consistent frying results. Equipped with a Millivolt Control System, and a 100% safety shut off valve. No electrical power is required. Conveniently located controls for easy access for operators, maintenance and service. All stainless steel heavy duty exterior construction, with a durable double panel door, rugged base and removable stainless steel basket guide. Equipped with two nickel plated baskets having cool grip plastic coated handles, to provide maximum operator comfort.

Quality, dependability and customer satisfaction make American Range the **brand of choice among professional chefs and restaurateurs worldwide.**



Culinary Series

AF50/25 HEAVY DUTY FRYER

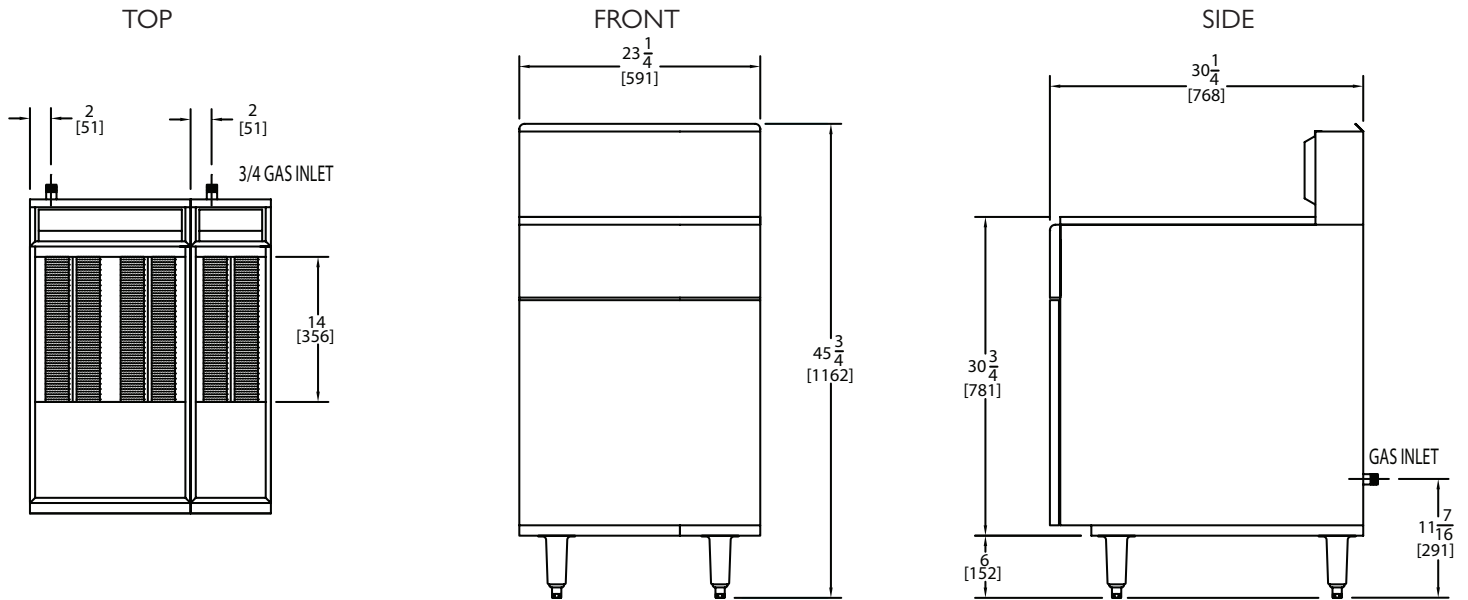

Model	Total BTU	KW	Width	Depth	Cooking area	No. of Burners	Shipping Weight	Lbs.	Kg.
AF50/25 (1) 20 lbs. - 30 lbs.					(1) 8 3/4" x 14"				
(11-15)	200,000	47	22 3/4"	30 1/2"	(171 x 356)	5		225	102
(1) 35 lbs. - 50 lbs.			(563)	(788)	(1) 18" x 18"				
(19-27) Per Pot					(457 x 457)				

STANDARD FEATURES

- 30 Lb. tank oil capacity
- Fryer vessel tank: All stainless steel high quality construction, 16 ga. #304 material
- Exterior: All Stainless Steel front, sides, door and basket hanger/flue riser.
- S/S Door: Durable double layer access door
- Basket Hanger: Removable basket hanger accommodates a large fryer basket.
- Fryer Baskets: Nickel plated fryer basket with cool grip plastic coated handle for operator safety and ease.
- Millivolt control system: No electrical hook up required.
- Thermostatic Control: Thermostat adjusts from 200°F to 400° F.
- Safety shut off System: 100% gas shut off when temperature reaches the hi-limit.
- Combination Gas Valve: Includes pressure regulator and pilot ignition system, hermetically sealed for operating stability. 3/4" N.P.T gas inlet in rear.
- Crumb Screen: Large removable tight mesh nickel plated screen under fryer basket.
- Drain Valve: 1 1/4" (32) diameter opening for easy draining of oil.
- Plastic coated handle for safety.
- Legs: 6" (157) high chrome plated adjustable legs.
- 5 Burners, **Power-Plus** 40,000 BTU each/**Power-Plus** 200,000 BTU total

OPTIONAL FEATURES

- Casters: 6" (152) high casters front two with locking brakes.
- Tank Cover: stainless steel cover to fit over fryer vessels.
- Joiner Strip: To connect two fryers and prevent oil seepage between the fryers or drain station.
- Quick Disconnect: Gas Hose with restraining device for added safety.
- Dump Station: stainless steel dump station with door and convenient cabinet below.
- Stainless steel side tray for working surface or dump station, can be used with optional heat lamp.
- Stainless steel Splash Guard (removable and tool-less).

GAS SUPPLY: 3/4" NPT Gas inlet. Manifold pressure is 5.0" W.C. for natural gas or 10.0" W.C. for propane gas. Specify type of gas and altitude if over 2000 feet.

CLEARANCES: For use only on non-combustible floors. Legs or casters are required, or 2" (51 mm) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305 mm) on sides, and 4" (102 mm) from rear. Radiant broilers for non-combustible locations only.

American Range is a quality manufacturer of commercial cooking equipment. Due to continuing product improvements, these specifications are subject to change without prior notice.



A70163
05042021



Chef Inspired, Professional Cooking Equipment

13592 Desmond St. Pacoima CA 91331
T. 818.897.0808 F. 818.897.1670
Toll Free: 888.753.9898
www.americanrange.com