



We put space to work.

Item # _____

Job _____

Super Erecta® Shelf Wire Shelving



- **Unique Design:** The open wire design of these shelves minimizes dust accumulation and allows free circulation of air, greater visibility of stored items and greater light penetration.
- **Durable Construction:** Super Erecta shelves and posts are constructed of heavy-gauge carbon steel or Type 304 stainless steel.
- **Choice of Finishes:** Super Erecta Brite™ and chrome-plated for dry storage; Metroseal™ Epoxy (green or gray), and Type 304 stainless steel for corrosive environments; and attractive epoxy color options for merchandising applications.
- **Metroseal:** Proprietary rust-resistant finish is a durable epoxy coating over a protective zinc substrate. Metroseal contains Microban® antimicrobial product protection which continuously fights the growth of bacteria, mold, and mildew that cause stains and odors. 12-year limited warranty against rust and corrosion.
- **Versatile:** Super Erecta® Shelf wire shelving can adapt to your changing needs. By using various accessories, hundreds of shelving configurations become possible.
- **Fast, Secure Assembly:** SiteSelect® Posts have a double groove visual guide feature every 8" (203mm), circular grooves at 1" (25mm) increments, and are numbered at 2" (50mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows maximum use of storage cube.
- **Adjustable Feet:** Bolt levelers compensate for surface irregularities.

Note: Stainless stationary posts are equipped with stainless steel leveling feet.



Super Erecta Chrome Wire



Super Erecta with Metroseal



Gray Metroseal Epoxy Finish with Microban



Green Metroseal Epoxy Finish with Microban



InterMetro Industries Corporation
 North Washington Street, Wilkes-Barre, PA 18705
 Product Information. U.S. and Canada: 1.800.992.1776
 Outside U.S. and Canada: www.metro.com/contactus

L02-006e
Printed in U.S.A. 6/20

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2020 InterMetro Industries Corp.




Super Erecta® Shelf Wire Shelving

10.01



Super Erecta® Shelf Wire Shelving

Wire Shelves

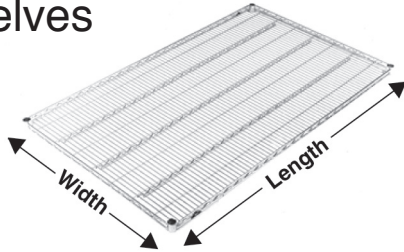

- See spec sheet 10.14 for epoxy color options.
- Plastic split sleeves are included with each shelf
Replacements are available: Cat. No. **9985** (bag of 4)
- Aluminum split sleeves are recommended for abusive mobile applications. Sleeves with stainless C-rings must be used for cart wash applications (exceeding 200°F/93°C) and for all autoclave applications.
Cat. No. **9986Z** (bag of 4 with zinc C-rings)
Cat. No. **9986S** (bag of 4 with stainless steel C-rings)
- Weight capacity (evenly distributed) per shelf
800 lbs. (363kg) for lengths of 18" to 48" (457 to 1219mm)
600 lbs. (272kg) for lengths of 54" (1370mm) or longer
- Weight capacity (evenly distributed) per unit.
Stationary shelving units have a maximum load capacity (evenly distributed) of 2,000 lbs. (907kg). Mobile units have a maximum capacity of three times the caster load rating up to but not exceeding 1,000 lbs. (453kg) total. Consult the Metro catalog for caster load ratings.

| Cat. No. Super Erecta Brite | Cat. No. Chrome | Cat. No. Metroseal Green (K3) with Microban | Cat. No. Metroseal Gray (K4) with Microban | Cat. No. Stainless | Nominal Width/Length | | Approx. Pkd. Wt. | |
|--------------------------------|--------------------|---|--|-----------------------|----------------------|----------|------------------|------|
| | | | | | (in.) | (mm) | (lbs.) | (kg) |
| 1424BR | 1424NC | 1424NK3 | 1424NK4 | 1424NS | 14x24 | 355x610 | 5.3 | 2.4 |
| 1430BR | 1430NC | 1430NK3 | 1430NK4 | 1430NS | 14x30 | 355x760 | 6.3 | 2.8 |
| 1436BR | 1436NC | 1436NK3 | 1436NK4 | 1436NS | 14x36 | 355x914 | 7.5 | 3.4 |
| 1442BR | 1442NC | 1442NK3 | 1442NK4 | 1442NS | 14x42 | 355x1066 | 8.3 | 3.8 |
| 1448BR | 1448NC | 1448NK3 | 1448NK4 | 1448NS | 14x48 | 355x1219 | 9.4 | 4.3 |
| 1460BR | 1460NC | 1460NK3 | 1460NK4 | 1460NS | 14x60 | 355x1524 | 11.8 | 5.4 |
| 1472BR | 1472NC | 1472NK3 | 1472NK4 | 1472NS | 14x72 | 355x1829 | 14.4 | 6.5 |
| - | 1818NC | 1818NK3 | 1818NK4 | - | 18x18 | 457x457 | 5.3 | 2.4 |
| 1824BR | 1824NC | 1824NK3 | 1824NK4 | 1824NS | 18x24 | 457x610 | 6.1 | 2.7 |
| 1830BR | 1830NC | 1830NK3 | 1830NK4 | 1830NS | 18x30 | 457x760 | 7.1 | 3.2 |
| 1836BR | 1836NC | 1836NK3 | 1836NK4 | 1836NS | 18x36 | 457x914 | 8.2 | 3.7 |
| 1842BR | 1842NC | 1842NK3 | 1842NK4 | 1842NS | 18x42 | 457x1066 | 9.3 | 4.2 |
| 1848BR | 1848NC | 1848NK3 | 1848NK4 | 1848NS | 18x48 | 457x1219 | 10.7 | 4.9 |
| 1854BR | 1854NC | 1854NK3 | 1854NK4 | 1854NS | 18x54 | 457x1370 | 11.9 | 5.4 |
| 1860BR | 1860NC | 1860NK3 | 1860NK4 | 1860NS | 18x60 | 457x1524 | 13.4 | 6.1 |
| 1872BR | 1872NC | 1872NK3 | 1872NK4 | 1872NS | 18x72 | 457x1829 | 14.6 | 6.6 |
| 2124BR | 2124NC | 2124NK3 | 2124NK4 | 2124NS | 21x24 | 530x610 | 10.1 | 4.6 |
| 2130BR | 2130NC | 2130NK3 | 2130NK4 | 2130NS | 21x30 | 530x760 | 10.5 | 4.8 |
| 2136BR | 2136NC | 2136NK3 | 2136NK4 | 2136NS | 21x36 | 530x914 | 10.7 | 4.9 |
| 2142BR | 2142NC | 2142NK3 | 2142NK4 | 2142NS | 21x42 | 530x1066 | 11.5 | 5.2 |
| 2148BR | 2148NC | 2148NK3 | 2148NK4 | 2148NS | 21x48 | 530x1219 | 11.9 | 5.4 |
| 2154BR | 2154NC | 2154NK3 | 2154NK4 | 2154NS | 21x54 | 530x1370 | 12.9 | 5.8 |
| 2160BR | 2160NC | 2160NK3 | 2160NK4 | 2160NS | 21x60 | 530x1524 | 13.4 | 6.1 |
| 2172BR | 2172NC | 2172NK3 | 2172NK4 | 2172NS | 21x72 | 530x1829 | 14.4 | 6.5 |
| 2424BR | 2424NC | 2424NK3 | 2424NK4 | 2424NS | 24x24 | 610x610 | 6.5 | 3.0 |
| 2430BR | 2430NC | 2430NK3 | 2430NK4 | 2430NS | 24x30 | 610x760 | 8.3 | 3.8 |
| 2436BR | 2436NC | 2436NK3 | 2436NK4 | 2436NS | 24x36 | 610x914 | 10.1 | 4.6 |
| 2442BR | 2442NC | 2442NK3 | 2442NK4 | 2442NS | 24x42 | 610x1066 | 11.9 | 5.4 |
| 2448BR | 2448NC | 2448NK3 | 2448NK4 | 2448NS | 24x48 | 610x1219 | 14.2 | 6.4 |
| 2454BR | 2454NC | 2454NK3 | 2454NK4 | 2454NS | 24x54 | 610x1370 | 16.1 | 7.3 |
| 2460BR | 2460NC | 2460NK3 | 2460NK4 | 2460NS | 24x60 | 610x1524 | 18.0 | 8.2 |
| 2472BR | 2472NC | 2472NK3 | 2472NK4 | 2472NS | 24x72 | 610x1829 | 21.4 | 9.7 |

Note: The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown. The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.

Note: The following restrictions apply to shelving units that utilize 14" (355mm) wide shelves:
Free-standing units: Units taller than 63" (1600mm) must be properly fastened to the floor or wall using Metro foot plates or wall brackets.
Mobile units: maximum allowable post height is 54" (1370mm).

Super Erecta® Shelf Wire Shelving

SiteSelect® Posts

Stationary Posts - Equipped with a leveling bolt to account for uneven floors.

- Height includes leveling bolt (completely tightened) and post cap. Leveling bolt can be adjusted 0.5" (13mm).
- Foot plates may be ordered separately and installed in place of leveling foot.
- Replacement leveling bolts: Zinc Cat. No. **RPF04-004**, Stainless Steel Cat. No. **RPF04-004C**
- Replacement post cap for standard posts: Black Cat. No. **RPC06-035**



SiteSelect Posts feature double grooves every 8" (203mm) to aid assembly.

| Cat. No. Chrome | Cat. No. Metroseal Green (K3) with Microban | Cat. No.. Metroseal Gray (K4) with Microban | Cat. No. Stainless Steel | Actual Height | | Approx. Pkd. Wt. | |
|--------------------|---|---|-----------------------------|---------------|------|------------------|------|
| | | | | (in.) | (mm) | (lbs.) | (kg) |
| 7P | 7PK3 | 7PK4 | - | 7.375 | 187 | 0.5 | 0.3 |
| 13P | 13PK3 | 13PK4 | 13PS | 14.375 | 365 | 1 | 0.5 |
| 27P | 27PK3 | 27PK4 | 27PS | 28.375 | 720 | 1.75 | 0.75 |
| 33P | 33PK3 | 33PK4 | 33PS | 34.375 | 873 | 2 | 0.9 |
| 54P | 54PK3 | 54PK4 | 54PS | 54.4375 | 1382 | 3 | 1.4 |
| 63P | 63PK3 | 63PK4 | 63PS | 62.4375 | 1585 | 3.5 | 1.6 |
| 74P | 74PK3 | 74PK4 | 74PS | 74.5 | 1892 | 4 | 1.8 |
| 86P | 86PK3 | 86PK4 | 86PS | 86.5 | 2197 | 5 | 2.3 |
| *96P | - | - | - | 96.5 | 2450 | 5.5 | 2.5 |

*96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.



Stationary Post



Post for Stem Caster

Mobile Posts (For use with Stem Casters)

- Height includes post cap.

| Cat. No. Chrome | Cat. No. Metroseal Green (K3) with Microban | Cat. No. Metroseal Gray (K4) with Microban | Cat. No. Stainless Steel | Actual Height | | Approx. Pkd. Wt. | |
|--------------------|---|--|-----------------------------|---------------|------|------------------|------|
| | | | | (in.) | (mm) | (lbs.) | (kg) |
| 13UP | 13UPK3 | 13UPK4 | 13UPS | 13.75 | 349 | 1 | 0.5 |
| 27UP | 27UPK3 | 27UPK4 | 27UPS | 27.75 | 704 | 1.75 | 0.75 |
| 33UP | 33UPK3 | 33UPK4 | 33UPS | 33.75 | 857 | 2 | 0.9 |
| 54UP | 54UPK3 | 54UPK4 | 54UPS | 53.8125 | 1366 | 3 | 1.4 |
| 63UP | 63UPK3 | 63UPK4 | 63UPS | 61.8125 | 1570 | 3.5 | 1.6 |
| - | 70UPK3 | 70UPK4 | - | 69.75 | 1771 | 3.75 | 1.7 |
| 74UP | 74UPK3 | 74UPK4 | 74UPS | 73.875 | 1876 | 4 | 1.8 |
| 86UP | 86UPK3 | 86UPK4 | 86UPS | 85.875 | 2181 | 4.5 | 2.0 |

Special Length Posts

Cut posts are available. Consult your Metro representative for more information.

Staked Posts (For use with Truck Dollies)

- Each post connects to the truck dolly through the stem receptacle. The stem receptacle is staked into the bottom of the post to ensure a durable connection in abusive mobile applications. Each includes a leveling/connecting bolt.

| Cat. No. Chrome | Cat. No. Stainless Steel | Actual Height | | Approx. Pkd. Wt. | |
|--------------------|-----------------------------|---------------|------|------------------|------|
| | | (in.) | (mm) | (lbs.) | (kg) |
| 54P-STKD | 54PS-STKD | 54.4375 | 1382 | 3 | 1.4 |
| 63P-STKD | 63PS-STKD | 62.4375 | 1585 | 3.5 | 1.6 |
| 74P-STKD | 74PS-STKD | 74.5 | 1892 | 4 | 1.8 |



Staked Post



Swaged Post

Swaged Posts (For use with Stem Casters in Cart Wash Applications)

- Each post has an aluminum cap swaged into the top of the post.

| Cat. No. Stainless Steel | Actual Height | | Approx. Pkd. Wt. | |
|-----------------------------|---------------|------|------------------|------|
| | (in.) | (mm) | (lbs.) | (kg) |
| 33UPS-SW | 33.75 | 857 | 2 | .9 |
| 54UPS-SW | 53.8125 | 1366 | 3 | 1.4 |
| 63UPS-SW | 61.8125 | 1570 | 3.5 | 1.6 |

Super Erecta Shelf®

Wire Shelving



We put space to work.

Super Wide Shelving

- **High-density Storage:** Super Wide shelves have a greater storage area for holding large quantities of supplies, especially large, bulky objects, providing maximum storage in minimum space.

- **Load Capacity (evenly distributed) per shelf:**

Depths: 30" and 36" (760 and 914mm)

800 lbs. (363kg) for lengths 48" (1219mm) or shorter.

600 lbs. (272kg) for lengths 54" (1370mm) or longer.

| Cat. No. Chrome | Cat. No. Metroseal Green (K3) with Microban | Cat. No.. Metroseal Gray (K4) with Microban | Cat. No. Stainless Steel | Nominal Width/Length | | Approx. Pkd. Wt. | |
|--------------------|--|--|-----------------------------|-------------------------|----------|---------------------|------|
| | | | | (in.) | (mm) | (lbs.) | (kg) |
| 3036NC | 3036NK3 | 3036NK4 | 3036NS | 30x36 | 760x914 | 14.2 | 6.4 |
| 3048NC | 3048NK3 | 3048NK4 | 3048NS | 30x48 | 760x1219 | 17.7 | 8.0 |
| 3060NC | 3060NK3 | 3060NK4 | 3060NS | 30x60 | 760x1524 | 20.2 | 9.2 |
| 3072NC | 3072NK3 | 3072NK4 | 3072NS | 30x72 | 760x1829 | 22.7 | 10.3 |
| 3636NC | 3636NK3 | - | 3636NS | 36x36 | 910x914 | 16.7 | 7.6 |
| 3648NC | 3648NK3 | - | 3648NS | 36x48 | 910x1219 | 21.6 | 9.8 |
| 3660NC | 3660NK3 | - | 3660NS | 36x60 | 910x1524 | 26.4 | 12.0 |
| 3672NC | 3672NK3 | - | 3672NS | 36x72 | 910x1829 | 31.6 | 14.3 |

Note: The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown. The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.



Foot Plates

- Use to bolt units to the floor, or when a broader, more stable foot is desired. Foot plates also help to protect floors by distributing the point load of the shelving unit across a larger contact point.
- Foot plates (completely tightened) add .125" (3mm) to the specified heights of each stationary post on the table.

Zinc Cat. No. **9993Z**

Stainless Steel Cat. No. **9993S**



"S" Hook

- Used to add on shelving units with only two posts required. Order two per shelf level.

Cat. No. **9995Z**

