Spec.

Universal Ledge Racks

Welded Aluminum



Ideal transport and storage for a wide variety of pans, trays and containers.

- Durable, lightweight welded aluminum constuction.
- Rugged square tubing frame provides durability and long life.
- Accommodates a variety of pans, trays, or storage boxes.
- Ledges are 6-1/4" wide and are welded on 4½" centers.
- All seams are fully welded and sealed to provide a smooth, easy-to-clean surface.
 No cracks or crevices to trap dirt!
- Welded corner gussets maintain square unit integrity.
- Casters are 5" swivel plate type with No-Mark[®] polyurethane tread.
- NSF listed.





Specifications:

Shall be constructed of hi-tensile, corrosion resistant, rust proof, primary extruded aluminum, Type 6063-T5 alloy. All seams shall be heli-arc welded with all welded and sealed (no rivets). Vertical uprights shall be extruded tube, $1\frac{1}{4}$ " x $1\frac{1}{2}$ " x .070 wall. Top and bottom frames shall be extruded tube, $1\frac{1}{4}$ " x $1\frac{1}{2}$ " x .070 wall, welded and shall be welded to uprights. Bottom frame has caster plates (pre-tapped), 3/8" thick, welded to frame so that casters are inset. Gussets of $1\frac{1}{2}$ " x $1\frac{1}{2}$ " x 5/8" thick angle are welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights with a $4-\frac{1}{2}$ " continuous weld. Two each tie rods of 1" x 1" x .070 wall extruded tube shall be welded to uprights. Extruded angle ledges are a stepped type, 2" x $6\frac{1}{4}$ " x .100 thick, with all corners chamfered and deburred. Ledges are welded to uprights on $4-\frac{1}{2}$ " centers. Casters shall be all swivel with 5" diameter, non-markeing polyurethane tire, $1-\frac{1}{4}$ " wide, with an operating temperature range of -25°F to +190°F. Wheel bearings shall be sealed and permanently lubricated.



Lakeside Manufacturing, Inc. 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A. 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

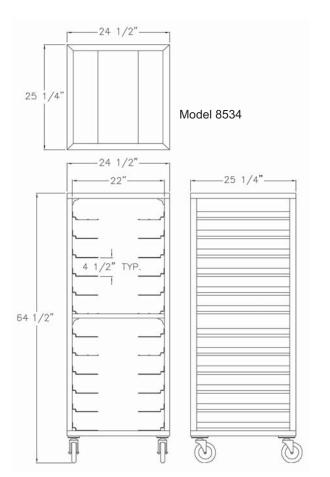

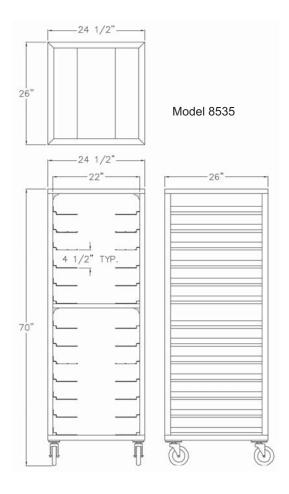

Dimensions:

	Number Of	Ledge		Overall Size			Case Wt.
Model	Ledges (Pair)	Туре	Spacing	W	D	Н	Lbs.
8534	12	Universal	41/2"	24½"	251/4"	641/2"	90
		61/4" Wide	(114)	(622	641	1638)	(40.5 kg)
8535	13	Universal	4½"	24½"	26"	70"	92
		61⁄4" Wide	(114)	(622	660	1778)	(41.4 kg)

Options:

- Break casters (set of 2)
- Pan stop
- Perimeter bumper
- Bottom corner bumpers (set of 4)
- Vertical leg bumpers (set of 4)
- Solid sheet base

Pan, Tray, or Rack Capacity:

Pan/Tray/Rack	Model 8534	Model 8535	
18" x 26"	12	13	
16" x 22"	12	13	
15" x 20"	12	13	
14" x 18"	24	26	
12" x 20" (4" High)	24	26	
20" x 20" (4" High)	12	13	



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A. 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com