



NEMCO®

FOOD EQUIPMENT



6055A



6055A-43

Item No. _____

Quantity _____

Model No.
6055A, 6055A-CW,
6055A-220, 6055A-43
Counter Top
Warmers

Add side dishes and entrees to existing lines or create entirely new temporary buffet lines quickly and easily with NEMCO's full-size countertop warmers. You'll enjoy greater menu flexibility and the ability to respond efficiently to changing menu requirements. Plus the reliable adjustable thermostat helps to ensure that food held in serving lines is always within your food safety temperature guidelines. Unique heating system design provides even heat distribution to prevent "hot spots". This design provides exceptional heat transfer, even heat distribution, and lower preheat time. NEMCO's warmers also have lower surface temperatures and longer life components than our competitors. Heavy-duty stainless steel well.

Standard Features:

- Heavy duty stainless steel construction
- Adjustable thermostat 120°F to 212°F
- Heating system design allows for fast preheat and extended life of unit
- Accepts a 12"x20" full size pan or fractional sizes
- Adapter bars and plates available for additional sizes
- Cycling indicator pilot light
- Temperature indicator settings: High, Medium, Low
- cETLus and NSF listing
- CE listing on model 6055A-220




NEMCO Food Equipment, LTD.
 301 Meuse Argonne
 P.O. Box 305
 Hicksville, OH 43526
 Phone (419) 542-7751
 FAX (419) 542-6690
www.nemcofoodequip.com

\\vrumpoedusa\job_v0121135\page 11 to Rip\21135va.pdf Last Modified: D:20110915:63230-05:00* Creation Date: D:20110915:63230-05:00*
 2469.D.dpi (Screened Data File POS, Right-Reading, Mono, Std-Over Simulated Spot Colors) [ABO:1100 Sealing Percent: RT:100 WD:100] (vml:1,uct: 0:175945] bleed: 0.125 margin size: 0.375
 95 Verifier 3015.10x PDI Version 8.3 Revision 1.88T, Ripped on Thursday, September 15, 2011 4:32:27 PM
 121 Lommi



Model No.
6055A, 6055A-CW,
6055A-43, 6055A-220

AIA File No.

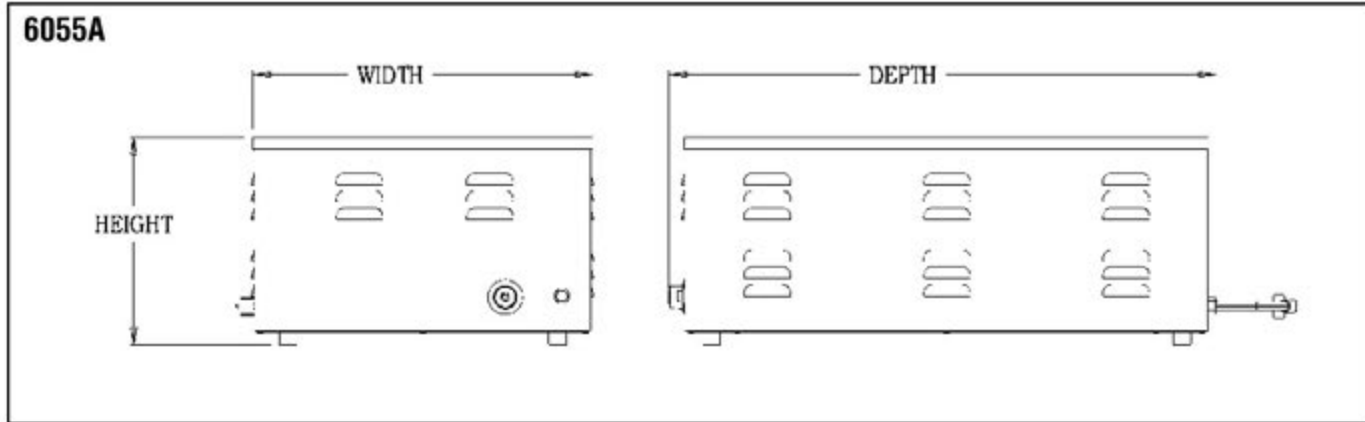

Specifications:

Model No.	Pre-heat time to 180° F	Width Inches/(cm)	Depth Inches/(cm)	Height Inches/(cm)	Voltage	Rated Wattage	Nominal Amps	Plug Configuration	Unit Weight lbs./(Kg)	Shipping Weight lbs./(Kg)
6055A	12 min.	14 5/8 (37.1)	23 7/8 (60.7)	9 (22.9)	120	1200	10	NEMA 5-15P	18 (8.2)	23 (10.4)
6055A-CW	10 min.	14 5/8 (37.1)	23 7/8 (60.7)	10 1/2 (26.7)	120	1500	12.5	NEMA 5-15P	19.1 (8.6)	23 (10.4)
6055A-220	12 min.	14 5/8 (37.1)	23 7/8 (60.7)	9 (22.9)	220	1200	5.5	CEE-7-7	19 1/2 (8.9)	24 (11)
6055A-43	14 min.	14 5/8 (37.1)	31 (78.8)	10 1/2 (26.7)	120	1500	12.5	NEMA 5-15P	28 (12.7)	34 (15.4)

Accessories for 6055A	Description
<input type="checkbox"/> 66092	Two-hole adaptor plates for one 7qt. & one 11qt. inset
<input type="checkbox"/> 66093	Two-hole adaptor plate for two 7qt. insets
<input type="checkbox"/> 66095	20" adaptor bar
<input type="checkbox"/> 66096	12" adaptor bar
<input type="checkbox"/> 66097	6" adaptor bar
<input type="checkbox"/> 67860	Three-hole adaptor plate for three 4qt. insets
Accessories for 6055A-43	
<input type="checkbox"/> 67763	Two-hole adaptor plates for two 11qt. insets
<input type="checkbox"/> 68591	Three-hole adaptor plate for three 7qt. insets
<input type="checkbox"/> 68592	Four-hole adaptor plate for four 4qt. insets



Typical Specifications

NEMCO countertop warmers shall be constructed with 300 series stainless steel wells and 400 series stainless steel cabinets. They shall have tubular heating elements attached to an aluminum heat dissipating plate. All models shall have an adjustable (up to 212° F) conduction thermostat and a pilot light that cycles with the operation of the heating element. 120V models shall have a cord and NEMA 5-15P plug while the 220V model shall have a cord and CEE 7-7 plug. Models 6055A, 6055A-CW, and 6055A-43 shall be cETLus and NSF listed. Model 6055A-220 shall be CE and NSF listed.



NEMCO Food Equipment, LTD.
 301 Meuse Argonne, P.O. Box 305
 Hicksville, OH 43526
 Phone (419) 542-7751
 FAX (419) 542-6690
 www.nemcofoodequip.com

\\rumpoedaa\job_v02\21135\page 1 from 1 to 1\6055A.pdf Last Modified: D:\20110915\03948-05-00-2469.D.dpl (Screened Data File PDF, Right-Reading, Mono, Std-Off Simulated Spot Colors) [ABO:100 Sealing Percent: RT:100 WD:100 Usr:\j\lucy.c:175945] bleed: 0.125 margin size: 0.375
 25 Version: 3015.102 HQI Version 8.3 Revision 1 REV. Ripped on Thursday, September 15, 2011 10:33:57 AM
 121 Steve