



# Model P14, P18, P24, P34 Portable Filter System



Model P14, P18, P24, P34 Portable Filter System

Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

### STANDARD SPECIFICATIONS

#### CONSTRUCTION

- Filter pan and pump assembly enclosure are constructed of polished stainless steel.
- All other surfaces are nickel plated finish.
- Welded steel frame mounted on four ball-bearing swivel casters for easy movement.
- 1/3 HP heavy duty motor and pump assembly.
- 5 foot (1.5 meter) flexible, sanitary, high temperature return hose equipped with nozzle.
- Return hose nozzle is nickel plated steel with a non-heat conducting handle.
- Extra large filter area for large fryer filtering.
- Heater to soften solid shortening for quicker filter start-up (optional).

#### CONTROLS

- ON/OFF/HEATER ON switch for operating pump.

#### OPERATIONS

- Four swivel caster design allows for easy movement and storage of the filter.
- Quick disconnect hose connections make it easy to assemble and disassemble.
- Low profile allows for easy placement under the fryer drain.
- Easy to remove filter media assembly for quick and easy filter paper replacement.
- Lift out filter pan for easy cleaning.

#### STANDARD ACCESSORIES

- 10 Foot (3.05 meters) oil proof supply cord
- Filter Pan
- Filter catch basket
- Sample filter paper (flat)
- Sample filter powder packets
- 1 sediment clean out scoop
- 1 - 7 inch (17.8 cm.) drain nipple

#### AVAILABLE OPTIONS & ACCESSORIES

- Filter heater (for solid shortening use)
- Filter powder packets
- Filter paper (flat)
- Cover

#### APPROVALS

- CSA Certified (AGA, CGA)
- NSF Listed
- MEA Approved
- CE Certified
- UL Listed




Patent Pending

Pitco Frialator, Inc., P.O. Box 501, Concord, NH 03302-0501 • 509 Route 3A, Bow NH 03304, USA  
(603) 225-6684 • Fax (603) 225-8472 • [www.pitco.com](http://www.pitco.com)



L10-037 Rev 8 (11/09)


## Model P14, P18, P24, P34 Portable Filter System

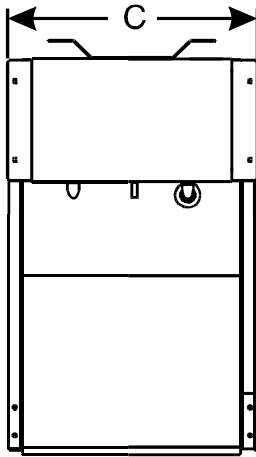

If you have: (Fryer Model #)	You need: (Filter Model #)
14, 14R, 14T, 35C+, 45C+	P14
18, SE18R	P18
20F, 20P	P24
24P, 24F, 24FF	P24
34P, 34F, 34FF	P34

\* Models 20F, 26F(FF), & 34F(FF) must have 8" legs or casters.

NOTE: Model numbers above represent both gas and electric units unless otherwise indicated (i.e. Both Model SG14 and Model SE14 use the P14 filter).

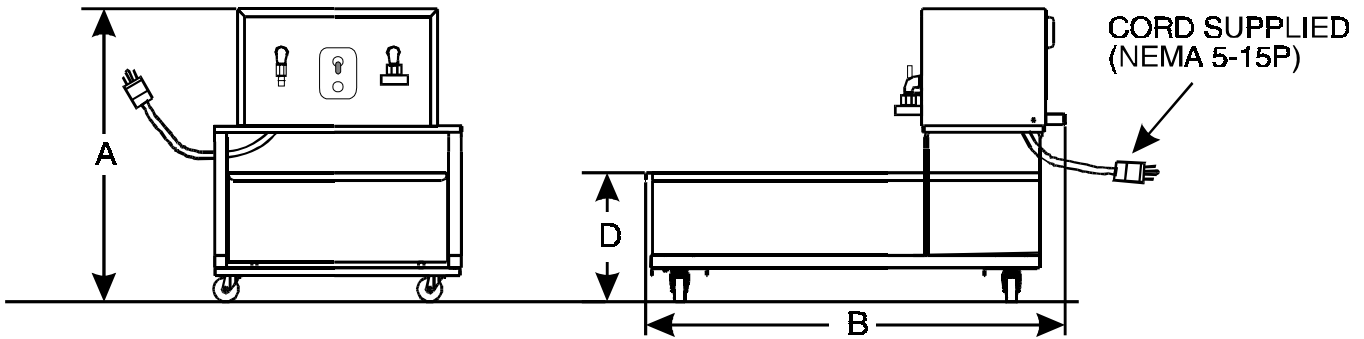

MODEL	LETTERED DIMENSIONS				MODEL	Pan Capacity	Shipping Information
	A	B	C	D			
P-14	24 in (61 cm)	30 in (76.2 cm)	17 in (43.2 cm)	10-1/2 in (28 cm)	P-14	55 lbs (24.9 Kg.)	131 lbs (59.4 Kg.) 10 cu. ft. (0.28 cu. meters)
P-18	24 in (61 cm)	34 in (86.4 cm)	20-1/4 in (51.4 cm)	10-1/2 in (28 cm)	P-18	75 lbs (34.0 Kg.)	150 lbs (68.0 Kg.) 14 cu. ft. (0.40 cu. meters)
P-24	26 in (66 cm)	42 in (106.7 cm)	20-1/4 in (51.4 cm)	12-1/2 in (33 cm)	P-24	160 lbs (72.6 Kg.)	181 lbs (82.1 Kg.) 18 cu. ft. (0.51 cu. meters)
P-34	29 in (73.7 cm)	42 in (106.7 cm)	20-1/4 in (51.4 cm)	15-1/2 in (40.6 cm)	P-34	210 lbs (95.3 Kg.)	206 lbs (93.4 Kg.) 20 cu. ft. (0.57 cu. meters)

Pumps up to 5.6 gallons (21.2 liters) per minute.

120 VAC / 60 Hz / 10 AMP  
220/240 VAC / 50 Hz / 4 AMP

Provide Pitco Model P \_\_\_\_ (14, 18, 24, 34) Portable Filter System. Unit shall have the ability to receive oil gravity drained from fryers. Model P-14 shall have 300 square inches (1,936 square cm) of filter area. Models P-18, 24 & 34 shall have 450 square inches (2,903 square cm) of filter area. Unit shall have a polished stainless steel filter pan and pump enclosure; all other surfaces to be nickel plated. Provide accessories as follows:

Mobile filtering of all of your frying appliances. Filter can be used with gravity drain fryers.



**Pitco Frialator, Inc.**, P.O. Box 501, Concord, NH 03302-0501 • 509 Route 3A, Bow NH 03304, USA  
(603) 225-6684 • Fax (603) 225-8472 • [www.pitco.com](http://www.pitco.com)

L10-037 Rev 8 (11/09) Specifications subject to change without notice.

Printed in the USA