

## SLICING

**Berkel****350 SERIES**  
VACUUM PACKAGE MACHINES

Model 350D



- 350** One 19" seal bar
- 350D** Two 19" seal bars

**STANDARD FEATURES**

- Tabletop models with a stainless steel housing and single 20" (508 mm) x 18" (457 mm) x 6.8" (172 mm) chamber.
- Model 350 includes a single 19" (485 mm) seal bar; Model 350D includes two 19" (485 mm) seal bars; provide high integrity double sealing with electric cut-off.
- Powerful, high quality 21 m<sup>3</sup>/h Busch pump and vacuum dial gauge.
- 1-speed, 1/4 H.P. motor, totally enclosed, permanently lubricated ball bearings, thermally protected.
- Model 350 furnished in 115/60/1, 14.2 amp, AC, ETL listed; Model 350D furnished in 115/60/1, 20.0 amp, AC, ETL listed.
- Variable vacuum setting with new vacuum sensor.
- Gas flush for the addition of an anaerobic gas mixture and/or pillow-pack seal.
- Vacuum cycle of 25-35 seconds.
- Simple to operate electronic, touch pad controls with up to 30 storable programs.
- Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

**FEATURES**

Berkel Models 350 and 350D are reliable tabletop vacuum package machines designed to meet most mid- to high-volume foodservice portion control, product storage and food retail needs. The units offer a spacious stainless steel chamber, powerful, high quality pump and single 19" (double on 350D) seal bar providing a high integrity double seal with electric cut-off. Both models offer an anaerobic gas flush to maintain product color in the vacuum package, extend shelf life and/or to provide a pillow-pack seal to protect the product. The units are simple to operate and maintain.

**OPTIONS**

- Liquid control system

**NEW LONGER 19" SEAL BARS****Berkel**

a division of ITW Food Equipment Group LLC

www.berkequipment.com

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote &amp; Order Fax: 1-800-444-0602



## 350 SERIES VACUUM PACKAGE MACHINES

### SPECIFICATIONS

**Finish/Construction:** Tabletop models with stainless steel housing and single chamber.

**Pump:** Powerful, high quality 21 m<sup>3</sup>/h Busch pump and vacuum dial gauge.

**Electrical:** Model 350 furnished in 115/60/1, 14.2 amp, AC, ETL listed. Model 350D furnished in 115/60/1, 20 amp, AC, ETL listed.

**Vacuum Chamber:** Single, stainless steel 18" (457 mm) x 18" (457 mm) x 6.8" (172 mm) chamber. Vacuum intervals of 1 to 99 seconds.

**Seal Bar(s):** Model 350 includes a single 19" (485 mm) seal bar; Model 350D includes two, 19" (485 mm) seal bars; provide high integrity double sealing with electric cut-off.


**Gas Flush:** Provides for the addition of an anaerobic gas mixture and/or pillow-pack seal.

**Controls:** Simple to operate electronic, touch pad controls with up to 30 storable programs.

**Motor:** 1-speed, 1¼ HP, totally enclosed, permanently lubricated ball bearings, thermally protected.

**Cord and Plug:** Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

**Warranty:** All parts, service and travel coverage for one year, excluding wear items.

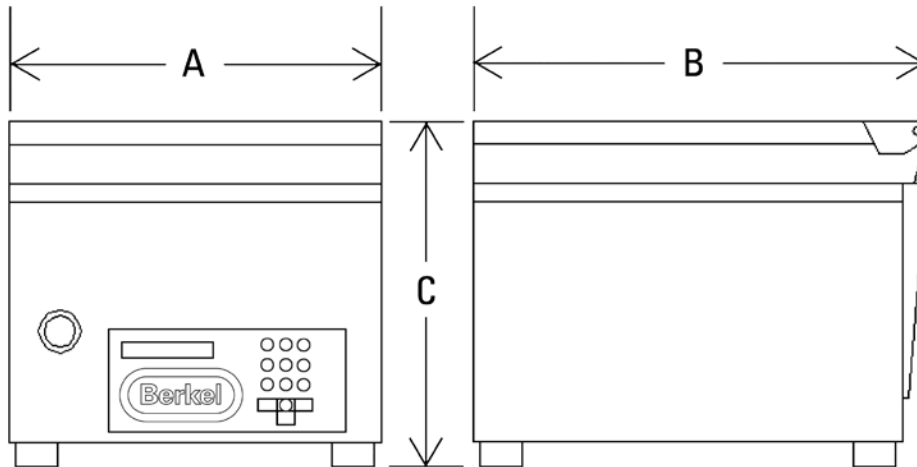

MODEL NUMBER	CHAMBER SIZE			SEAL BAR	SEAL BAR LENGTH	PRODUCT DIMENSIONS		
	WIDTH	DEPTH	HEIGHT			WIDTH A	DEPTH B	HEIGHT C
350	20" (508 mm)	18" (457 mm)	6.8" (172 mm)	1	19" (485 mm)	23" (585 mm)	24" (610 mm)	20½" (445 mm)
350D	20" (508 mm)	18" (457 mm)	6.8" (172 mm)	2	19" (485 mm)	23" (585 mm)	24" (610 mm)	20½" (445 mm)

MODEL NUMBER	PUMP m <sup>3</sup> /h	ELECTRICAL	WEIGHT	BOX DIMENSIONS		
				WIDTH	DEPTH	HEIGHT
350	21	115/60/1	Net 171 lbs. (78 kg) Ship 231 lbs. (105 kg)	32" (813 mm)	25" (635 mm)	30" (686 mm)
350D	21	115/60/1	Net 184 lbs. (84 kg) Ship 244 lbs. (111 kg)	32" (813 mm)	25" (635 mm)	30" (686 mm)

**Berkel** a division of ITW Food Equipment Group LLC

www.berkelequipment.com

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

**NOTE:** As we continually strive to improve our products, specifications are necessarily subject to change without notice.