





**MODELS** 

KGL-OU-(48)

**COMBINATION TYPE CASE** 

CASE HOLDS 36°F TO 40°F • UPPER SECTION CAN BE OPERATED AS REFRIGERATED OR DRY MULTIPLE USES • FORCED AIR REFRIGERATION • OPEN FRONT LOWER SECTION FRONT LOADING LOWER SECTION • TEMPERED GLASS, REAR SLIDING DOORS IN UPPER SECTION














SELF CONTAINED	Model	O.A. Length (inches)	Volume FT³	Electrical					Weight lbs		Crate Size (inches)		
				Compressor		LIGHTS	Evap	Total	No	With			
				Н.Р	F.L.A 115V	Fans HTRS	PAN	Amps 115 V	Crate	Crate	L"	W"	H″
S	KGL-OU-48-S	48.03	11	3/4	16	1.33	6.67	24	564	708	53	40	71

## STANDARD FEATURES

CFC free injected foam insulation
Silver colored PVC coated steel front panel
PVC coated steel gray interior
Wood laminate covered end panels
LED lighting in canopy and under all shelves
Height adjustable shelves can be tilted
Temperature and defrost regulated by a digital controller
Removable condensate evaporating pan for easy cleaning
Slide out condensing unit on self-contained units

## **OPTIONAL FEATURES**

Stainless steel front panel
Stainless steel base and / or interior
Mirror rear sided doors (upper section)
Mirrored side glass
Front panel bumper protector
PVC coated gray steel folding rear shelf
Stainless steel folding rear shelf
Acrylic product partitions
Shelf price tag moldings
Casters add 4-3/8" to height
Stainless steel legs are adjustable from 5-1/8" to 7-5/8"
Please specify grey or white when ordering

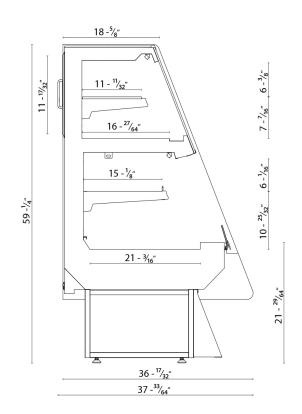



## NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient).

## **WARRANTY**

One year parts and labor with an additional four years on the compressor (part only)

