HORIZONTAL BOTTLE COOLERS

EBC - Series • EBC37 • EBC50 • EBC65 • EBC80 • EBC95











▲ EBC80



▲ EBC95

Cabinet Construction

Heavy duty stainless steel countertop, rail and lids, with textured and laminated black vinyl exterior. Galvanized steel interior. 1 3/4" thick high density foamed-in-place polyurethane insulation. Built-in caster thread receptacles for all units.

Refrigeration System

- · Side mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- · Forced-air cooling with multiple evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- · Environmentally friendly CFC free R-134A refrigerant
- · Air defrost controlled by electrical timer
- · Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- · Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Lighting

 Shielded vertical LED interior lighting with on/off switch for energy efficiency, minimal heat generation and enhanced illumination (available from 2017 models)

Lids & Locks, Openers

- · Heavy duty stainless steel, easy glide and removable lids
- \cdot 3/4" thick lids, foamed-in-place polyurethane insulation
- · Ratchet lock to secure lids (standard)
- · Removable bottle cap opener and cap catcher

Shelving

- \cdot Epoxy coated floor wire shelves for cold air circulation
- · Adjustable epoxy coated wire bin dividers

Temperature Control


- · Factory preset temperature, 35°F
- · Temperature setting range from 32°F to 42°F
- · Easy to set analog thermostat

Option

· 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)



Dimensions

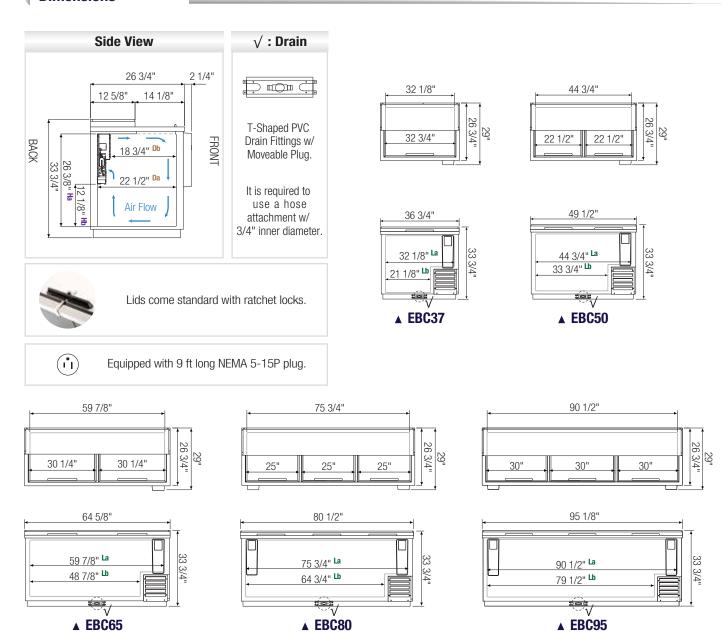

Model	Ref/ Frz/ Dual	# of Lids	НР	Refrigerant	# of Bin Dividers	Capacity		# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions (Inches)			Interior Dimensions (Inches)		
							Bottles	Ononvoo	(* 112 111)		(LBS)	L	D [*]	Н	L	D	Н
EBC37	Ref	1	1/4+	R-134A	2	348	264	1	115-60-1	4.20	204	36 3/4	26 3/4	33 3/4	32 1/8 ^{La} 21 1/8 ^{Lb}	22 1/2 ^{Da} 18 3/4 ^{Db}	26 3/8 Ha 12 3/8 Hb
EBC50	Ref	2	1/4+	R-134A	3	576	396	2	115-60-1	4.20	245	49 1/2	26 3/4	33 3/4	44 3/4 ^{La} 33 3/4 ^{Lb}	22 1/2 ^{Da} 18 3/4 ^{Db}	26 3/8 Ha 12 3/8 Hb
EBC65	Ref	2	1/4+	R-134A	4	780	528	2	115-60-1	4.20	286	64 5/8	26 3/4	33 3/4	59 7/8 ^{La} 48 7/8 ^{Lb}	22 1/2 ^{Da} 18 3/4 ^{Db}	26 3/8 Ha 12 3/8 Hb
EBC80	Ref	3	1/3	R-134A	5	1,008	720	3	115-60-1	5.30	348	80 1/2	26 3/4	33 3/4	75 3/4 ^{La} 64 3/4 ^{Lb}	22 1/2 ^{Da} 18 3/4 ^{Db}	26 3/8 Ha 12 3/8 Hb
EBC95	Ref	3	1/3	R-134A	6	1,320	900	3	115-60-1	5.30	428	95 1/8	26 3/4	33 3/4	90 1/2 ^{La} 79 1/2 ^{Lb}	22 1/2 ^{Da} 18 3/4 ^{Db}	26 3/8 Ha 12 3/8 Hb
* : Depth	n does r	not inc	lude b	ottle cap open	er with inte	egrated	cap rece _l	otacle.								Ref =	Refrigerato

La, Lb: Interior Length Da, Db: Interior Depth Ha, Hb: Interior Height









