

DRAWERED SANDWICH PREP TABLES

Back Mounted Condensing Unit

EPBN – Series

- EPBNR1-D2 • EPBNSR2-D2 • EPBNR2-D4
- EPBNWR2-D4 • EPBNR3-D2



▲ EPBNR1-D2



▲ EPBNSR2-D2



▲ EPBNR2-D4



▲ EPBNWR2-D4



▲ EPBNR3-D2

Cabinet Construction

Heavy duty stainless steel interior and exterior, galvanized steel finished bottom and back wall of exterior. High quality 16 gauge stainless steel worktop, top lid and hood. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door and drawer heater installed around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Back mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Slide-out condensing unit for convenient repair and maintenance
- Front air breathing for built-in applications
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief ports for rapid re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Option

- 2 1/2" diameter casters (3 1/2" overall height)

Doors & Drawers

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door and drawer gaskets for easy replacement
- Heavy duty recessed door and drawer handles for a flat surface
- Heavy duty 304 stainless steel drawer frames with low-friction ball bearing slides (*note: refer to the website for pan configurations*)

Preparation Area

- 1/2" thick foam insulated lids to prevent moisture build-up and heat exchange
- Removable and adjustable sanitary 12 1/4" deep cutting board
- Sanitary polycarbonate pans (*note: refer to the website for pan configurations*)

Shelving (model EPBNR3-D2)

- One epoxy coated wire shelf
- Stainless steel pilasters and shelf clips


Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat







Dimensions

Side View

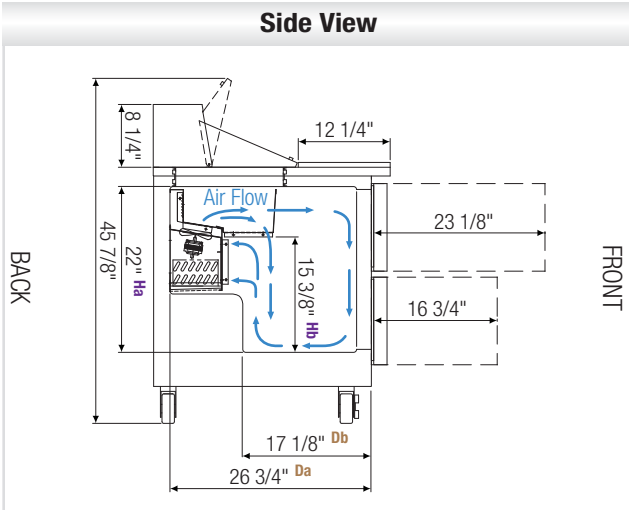







ⓘ Equipped with 9 ft long NEMA 5-15P plug.

√ : Mounting space for standard aftermarket overshef.

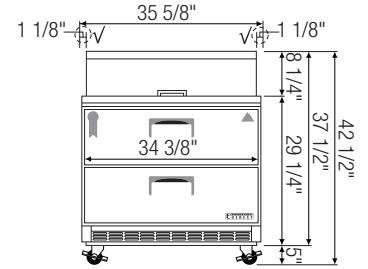

▲ EPBNR1-D2

▲ EPBNSR2-D2

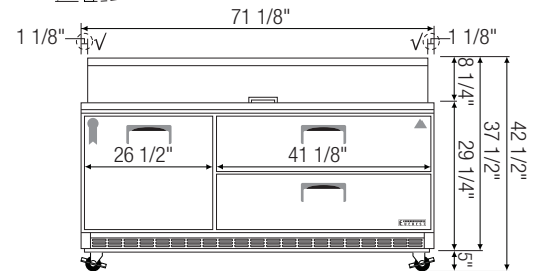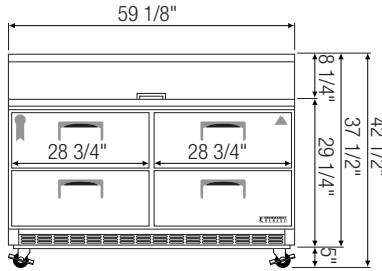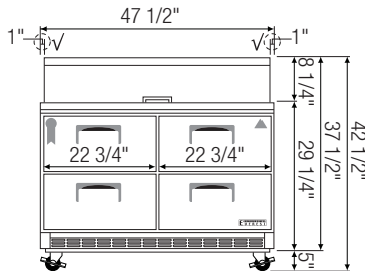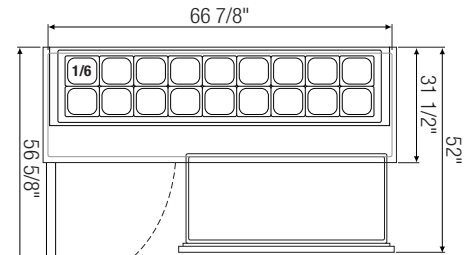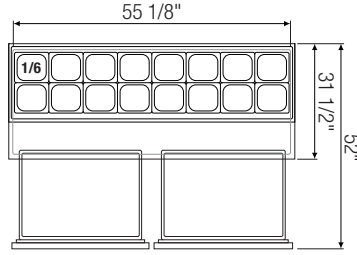

▲ EPBNR2-D4

▲ EPBNWR2-D4

▲ EPBNR3-D2

Model	Ref/ Frz/ Dual	# of Doors & Drawers	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	# of Pans (Top)	# of Pan (Drawer)	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			Interior Dimensions (Inches)				
												L	D	H*	L	D	H		
EPBNR1-D2	Ref	2(DR)	6.5	1/5	R-134A	N/A	1/6x8 ^a	1/2x4 1/4x2	115-60-1	3.98	242	27 3/4	31 1/2	37 1/2	23 5/8	26 3/4 17 1/8	Da Db	22 15 3/8	Ha Hb
EPBNSR2-D2	Ref	2(DR)	8.5	1/5	R-134A	N/A	1/6x8	1/2x4, 1/3x2 1/4x2, 1/6x1	115-60-1	3.98	282	35 5/8	31 1/2	37 1/2	31 1/2	26 3/4 17 1/8	Da Db	22 15 3/8	Ha Hb
EPBNR2-D4	Ref	4(DR)	11.8	1/4+	R-134A	N/A	1/6x12	1/2x4, 1/3x2 1/4x2, 1/6x1	115-60-1	4.11	364	47 1/2	31 1/2	37 1/2	43 1/4	26 3/4 17 1/8	Da Db	22 15 3/8	Ha Hb
EPBNWR2-D4	Ref	4(DR)	15	1/3	R-134A	N/A	1/6x16 ^a	1/2x4, 1/3x2 1/4x2, 1/6x1	115-60-1	5.20	421	59 1/8	31 1/2	37 1/2	55 1/8	26 3/4 17 1/8	Da Db	22 15 3/8	Ha Hb
EPBNR3-D2	Ref	1(D) 2(DR)	18.3	1/3	R-134A	1	1/6x18	1/2x4, 1/3x2 1/4x2, 1/6x1	115-60-1	5.20	466	71 1/8	31 1/2	37 1/2	66 7/8	26 3/4 17 1/8	Da Db	22 15 3/8	Ha Hb

* : Height does not include 5" for casters.

a : Pan count applicable for units manufactured from April 2016.

† : Drawer pans are not included.

Da, Db : Interior Depth Ha, Hb : Interior Height

Ref = Refrigerator | (DR) = Drawer | (D) = Door

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.