

SIDE MOUNT GLASS DOOR UNDERCOUNTER REFRIGERATORS

Side Mounted Condensing Unit



ETG – Series • ETGSR2 • ETGR2 • ETGWR2



▲ ETGSR2



▲ ETGR2



▲ ETGWR2

Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished bottom and back wall of exterior. High quality 16 gauge stainless steel worktop. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes).

Refrigeration System

- Side mounted condensing unit for extra interior space use compared to back mounted units
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Removable condenser coil air filter for easy cleaning
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost, temperature initiated and terminated
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief ports for rapid re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Lighting

- Shielded vertical LED interior lighting with on/off switch for energy efficiency, minimal heat generation and enhanced illumination

Doors

- Grey PVC door frames
- Low emissivity double pane glass system reflects UV rays and improves insulation for maximized energy efficiency
- Automatic self-close by weight
- Removable doors and stainless steel door tracks for easy cleaning

Shelving

- Two epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Temperature Control




- Factory preset temperature, 35°F
- Temperature setting range from 33°F to 54°F
- Easy to read digital temperature display
- Easy to program push-button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature

Options

- 4" high stainless steel backsplash for worktop use
- 2 1/2" diameter casters (3 1/2" overall height)



Dimensions

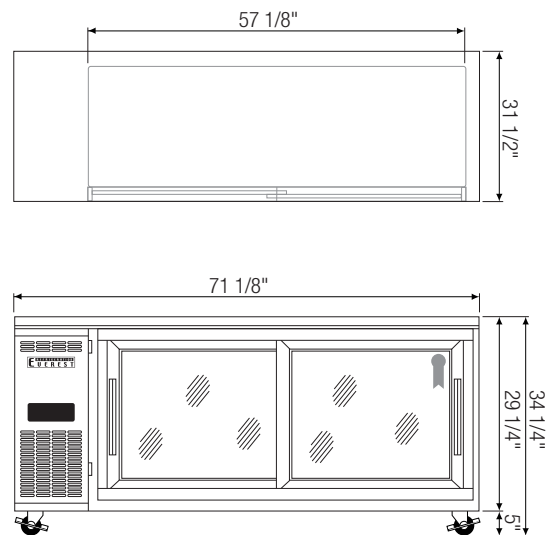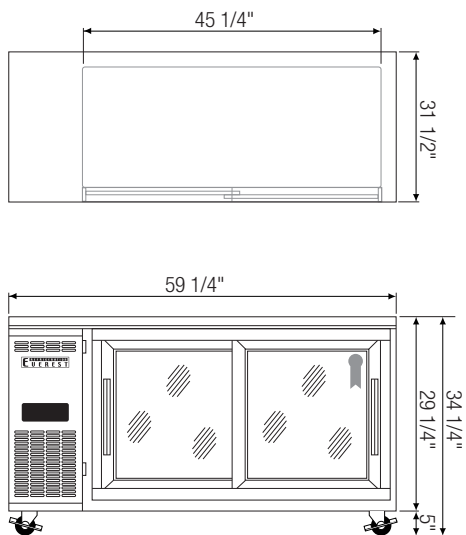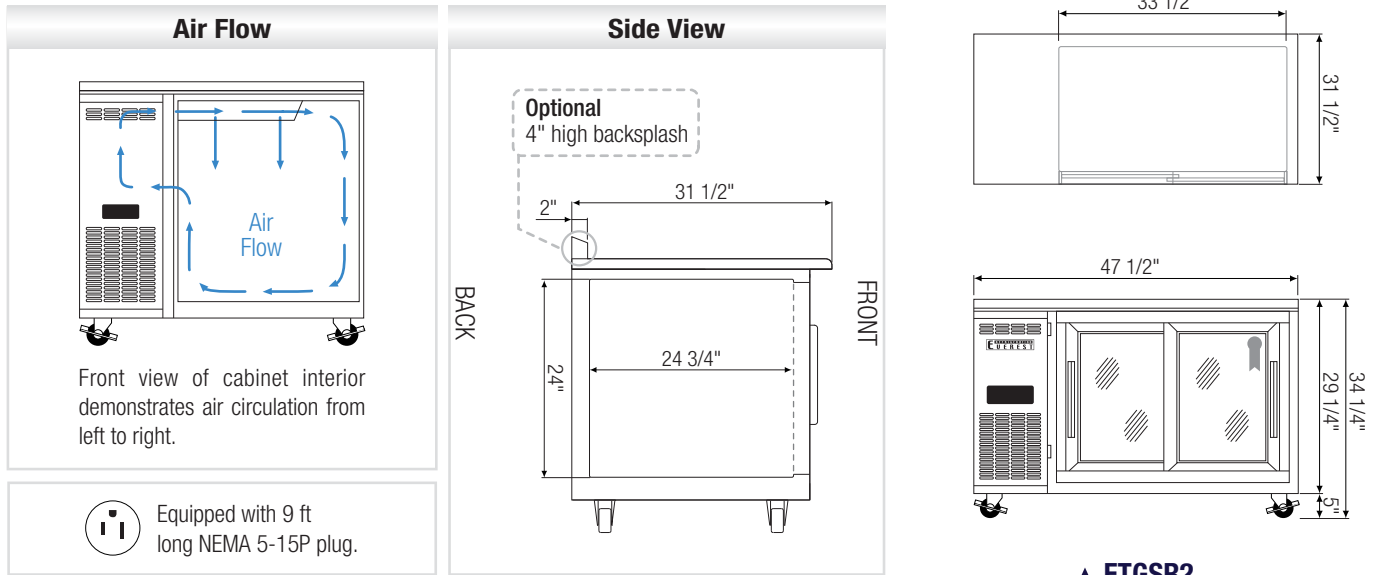

| Model | Ref/ Frz/ Dual | # of Doors | Capacity (Cu.Ft.) | HP | Refrigerant | # of Shelves | BTU/HR [†] | Power (V-Hz-Ph) | Amps | Crated Weight (LBS) | Exterior Dimensions (Inches) | | | Interior Dimensions (Inches) | | |
|---------------|----------------------|---------------|----------------------|------|-------------|-----------------|---------------------|--------------------|------|---------------------------|---------------------------------|--------|--------|---------------------------------|--------|----|
| | | | | | | | | | | | L | D | H* | L | D | H |
| ETGSR2 | Ref | 2 (sliding) | 13 | 1/4+ | R-134A | 4 | 2,075 | 115-60-1 | 4.08 | 282 | 47 1/2 | 31 1/2 | 29 1/4 | 33 1/2 | 25 1/8 | 24 |
| ETGR2 | Ref | 2 (sliding) | 18 | 1/4+ | R-134A | 4 | 2,075 | 115-60-1 | 4.13 | 318 | 59 1/4 | 31 1/2 | 29 1/4 | 45 1/4 | 25 1/8 | 24 |
| ETGWR2 | Ref | 2 (sliding) | 23 | 1/3 | R-134A | 4 | 2,555 | 115-60-1 | 5.24 | 355 | 71 1/8 | 31 1/2 | 29 1/4 | 57 1/8 | 25 1/8 | 24 |

* : Height does not include 5" for casters.

† : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.