

Delta® 5-E

ľ				•	_	•		_	
٨	Λ	-1	Ι.						

M	0	d	е	S
١V	IU	u	C	2

Delta® 5-E



Standard Features

- Functions as both a glasswasher and a dishwasher, accommodating wares up to 11-1/2" (292 mm) high
- Push-button start
- · Electromechanical controls
- Easily accessible controls
- Built-in chemical pumps and priming switches
- Stainless steel wash pump
- Lower rotary wash arm and fixed upper jets
- Door switch
- · Adjustable bullet feet
- Swing-out control box for easy service and access
- Side control panel for easy access to switches
- Dial temperature gauge for constant monitoring of temperature
- · Side skirt panels
- · Latch-type front (lower) panel
- · Delime/manual wash switch

Options

Project _

Quantity_

Approval _

☐ Water Hammer Arrestor

CSI Section 11400 _____

- ☐ Scale Prevention System (SPS)
- Replacement cartridge for SPS (2-pack)

Accessories

- ☐ 36-Compartment Rack
 - __ 4-1/8" tall (105 mm)
 - 5-5/8" tall (143 mm)
 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack
- ☐ Flat Rack
- ☐ Half Rack

Specifications

Uses only 1.16 gallons (4.39 liters) of water per cycle

Cleans 40 racks per hour

1,440 glasses per hour

90-second operating cycle

Powerful 1 hp wash pump motor

Built-in chemical pumps and priming switches

Air-gap water inlet

11-1/2" (292 mm) wash chamber clearance

Gravity drain

Built-in waste accumulator

Sustaining heating element maintains final rinse between 120°F (49°C) and 140°F (60°C)

Removable end plugs on lower wash arm and removable upper jets


Durable stainless steel construction









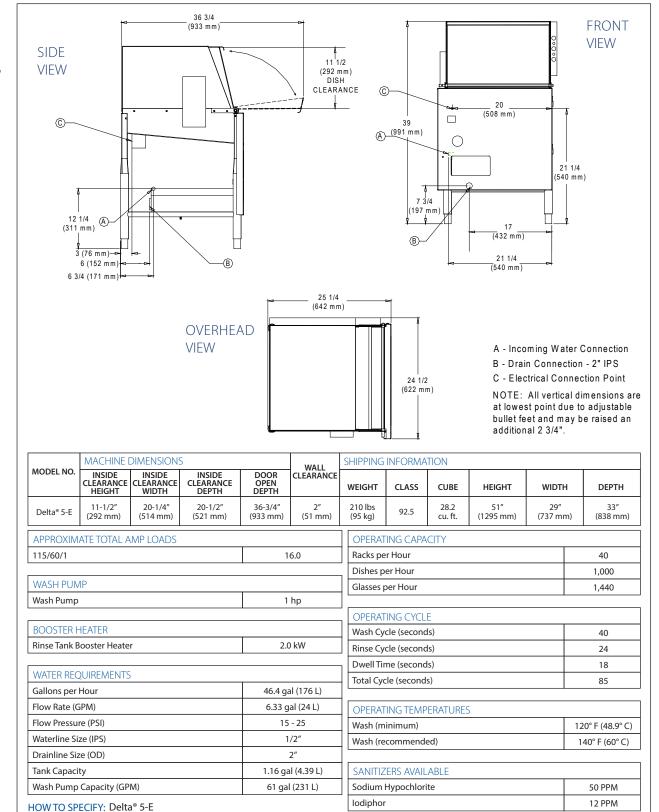

Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734 Mailing Address: P.O. Box 1060, Barbourville, KY 40906 Telephone: 888-800-5672 • Fax: 606-523-1799 Email: info@jacksonwws.com 07610-004-13-56 [01/05/16]

www.jacksonwws.com