

# REACH-IN REFRIGERATORS

Model:  69K-031HC  69K-032HC  69K-033HC



69K-031HC



69K-032HC



69K-033HC

Central Reach-In Refrigerators keep frequently accessed ingredients within reach and at the proper storage temperature to preserve freshness and prolong shelf life. Capacity options range from 23 to 72 cubic feet. Single or multi-door models are available to accommodate various volume requirements. Each reach-in refrigerator is constructed from stainless steel and has features that are meant to meet high-demand applications, including an oversized refrigeration system, door operated interior LED lighting and self closing doors.

### FEATURES

- Top-mounted refrigeration system
- Oversized evaporator and condensing unit for quick cooling, temperature recovery and energy efficiency
- Self-contained, energy efficient refrigeration system
- Automatic, programmable defrost system
- Automatic interior LED lighting
- Open door alert, beeps when door has been inadvertently left open
- Hinged, self closing doors with recessed handles
- Door locks for security
- 4" diameter swivel casters (2 with brakes – shorter casters are an available option)
- Integral condensate evaporator eliminates need for a floor drain connection

### TEMPERATURE


- Holding temperature: 34° to 41°F (1° to 5°C)
- Digitally controlled system maintains optimum temperature
- LED temperature display is easily viewed up to 15 feet away

### CONSTRUCTION

- Exterior Material: Stainless Steel
- Interior Material: White, Painted Aluminum
- Comes with 6' NEMA 5-15 Cord Set
- Shelving: Heavy duty PE coated wire shelves.
  - 69K-031HC Three (3) Shelves
  - 69K-032HC Six (6) Shelves – 3 per door section.
  - 69K-033HC Nine (9) Shelves – 3 per door section.

**REFRIGERANT**  
Environmentally-friendly R290a

**ELECTRIC**  
120V/60Hz/1 Ph (NEMA 5-15P)  
\* Plugs into conventional dedicated 115V wall outlet




### WARRANTY (USA / CANADA)

Three (3) year parts  
Three (3) year on-site labor  
Administered by Central, 800-289-3637

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Central Product will deliver years of trouble free, reliable, low maintenance, efficient operation.


# REACH-IN REFRIGERATORS

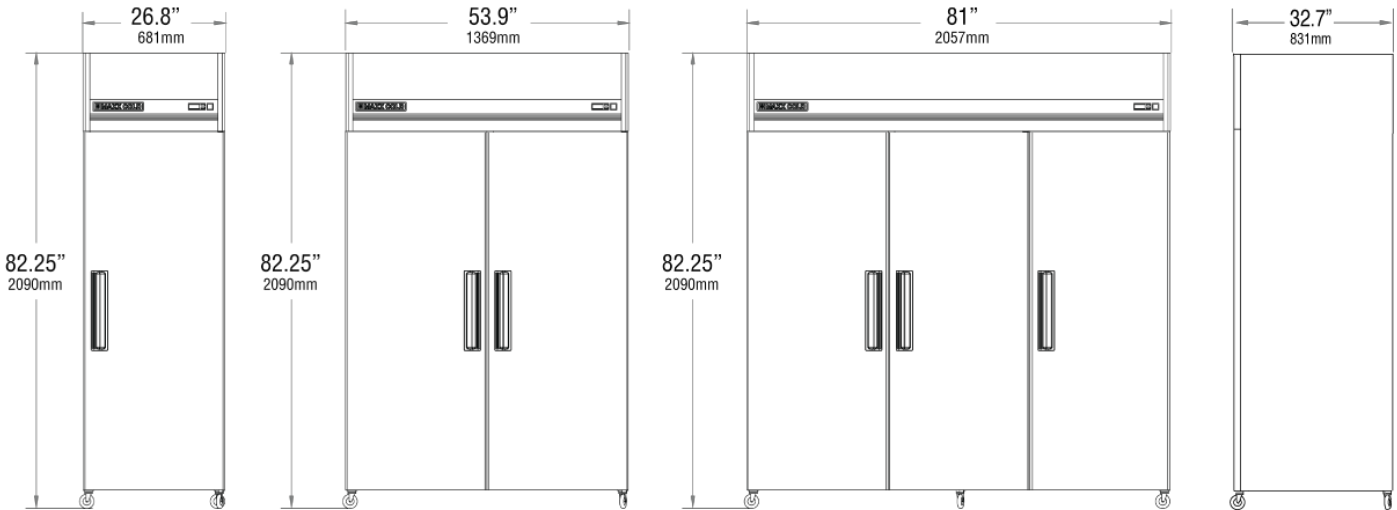

69K-031HC

69K-032HC

69K-033HC

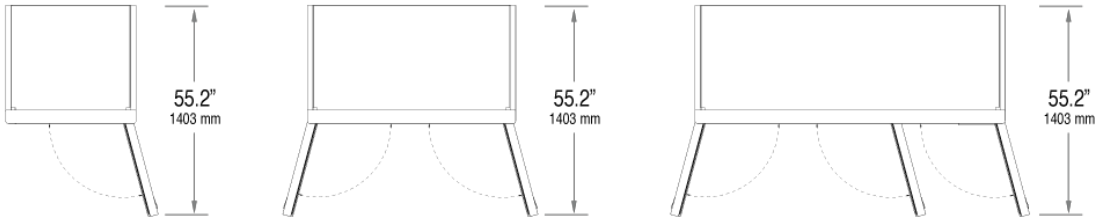

	69K-031HC	69K-032HC	69K-033HC
	** Dimensions include Standard Caster Height**		
<b>In: External Dimensions W x D x H</b>	26.8 x 32.7 x 82.25	53.9 x 32.7 x 82.25	81 x 32.7 x 82.25
<b>mm: External Dimensions W x D x H</b>	681 x 831 x 2090	1369 x 831 x 2090	2057 x 831 x 2090
<b>In: Internal Dimensions W x D x H</b>	21.9 x 26.5 x 52.1	49.1 x 26.5 x 52.1	76.1 x 26.5 x 52.1
<b>mm: Internal Dimensions W x D x H</b>	556 x 673 x 1324	1246 x 673 x 1324	1933 x 673 x 1324
<b>Capacity</b>	23 Cu Ft / 651 L	49 Cu Ft / 1,387 L	72 Cu Ft / 2,039 L
<b>Hinged Doors</b>	1	2	3
<b>Shelves</b>	3	6	9
<b>Max Amp Draw</b>	6	9	10
<b>Electrical Service</b>	115V/60Hz/1Ph	115V/60Hz/1Ph	115V/60Hz/1Ph
<b>Provided NEMA Cord Set</b>	5-15	5-15	5-15
<b>R290a Charge Size</b>	3 oz	3.7 oz	5.29 oz
<b>Unit Weight</b>	282 lb / 128 kg	457 lb / 207 kg	468 lb / 212 kg
<b>Shipping Weight</b>	311 lb / 143 kg	536 lb / 244 kg	639 lb / 291 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.