

UNDERCOUNTER FREEZERS

Model: 69K-052HC 69K-053HC 69K-110HC



69K-052HC



69K-053HC



69K-110HC

Central Undercounter Freezers are designed for optimal performance, durability and reliability. Three space efficient sizes ensure your application storage requirements can be cost-effectively satisfied.

FEATURES

- Easy to grip recessed drawer handles
- 3” casters are standard
- Adjustable shelves (one (1) per section/door)
- Available in multiple sizes to suit your needs
- Large LED temperature display is easily visible from up to 15 feet away

TEMPERATURE

- Holding temperature: -10° to 10°F (-23° to -12°C)
- Comes factory set to -4°F (-20°C)
- Forced-air refrigeration delivers consistent temperature regulation
- Solid-state controls deliver consistent, easily adjustable temperature performance
- Automatic defrost system maintains the ideal storage conditions at all times

CONSTRUCTION


- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Painted Aluminum
- Urethane insulated walls and doors
- Heavy duty epoxy coated shelves

REFRIGERANT

Environmentally-friendly R290a propane

ELECTRIC

120/60Hz/1 Ph (NEMA 5-15)



NEMA 5-15P



Intertek
Conforms to
ANSI-NSF 7



Intertek
Conforms to
ANSI UL 471



Environmentally
Friendly



DOE 2017
Compliant


WARRANTY (USA / CANADA)

Three (3) year parts and on-site labor
Five (5) year compressor
Administered by Central, 800-289-3637


Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

UNDERCOUNTER FREEZERS




69K-052HC

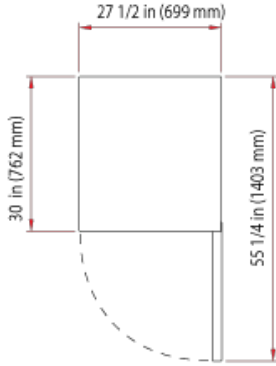

69K-053HC



69K-110HC

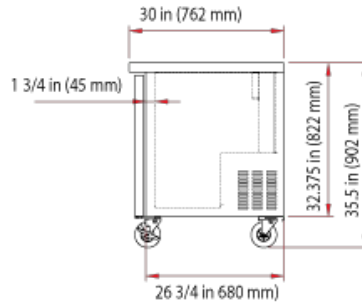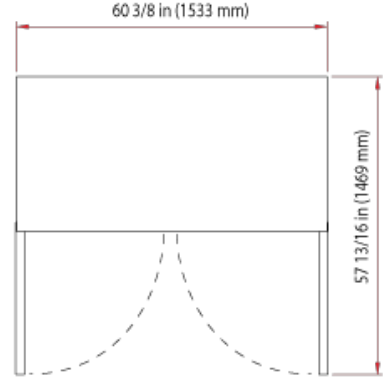

	External Dimensions in / mm	Internal Dimensions in / mm	Capacity	Temperature Range	Voltage	Max Amp Draw	Shelves	R290a Charge Size	Unit Weight	Shipping Weight
69K-052HC	27.5 x 30 x 35.5 699 x 762 x 902	22.9 x 18.8 x 24.5 581 x 478 x 622	6.5 Cu Ft 184 L	-4° to 10°F -20° to -12° C	120V/60Hz	5	1	2.47 oz	192 lb 87 kg	224 lb 102kg
69K-053HC	48.3125 x 30 x 35.5 1227 x 762 x 902	43.5 x 18.8 x 24.5 1104 x 478 x 622	12 Cu Ft 340 L	-4° to 10°F -20° to -12° C	120V/60Hz	5	2	2.65 oz	278 lb 126 kg	310 lb 141 kg
69K-110HC	60.375 x 30 x 35.5 1533 x 762 x 902	56.2 x 18.8 x 24.5 1428 x 478 x 622	15.5 Cu Ft 439 L	-4° to 10°F -20° to -12° C	120V/60Hz	5	2	2.82 oz	327 lb 148 kg	362 lb 166 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.