

7750 Georgetown Road Indianapolis, IN 46268 800-289-3637 • Fax 800-882-0086

| Project Name: |                     |
|---------------|---------------------|
| Location:     |                     |
| Item #:       | Qty:                |
| Model:        |                     |
| www.Ce        | ntralRestaurant.com |

## GLASS DOOR MERCHANDISER | 72 Cu Ft REFRIGERATOR

Model:



69K-116HC



69K-056HC (Color: Black)



69K-123HC (Door: Sliding)



69K-113HC

(Color Black. Door Sliding)

Glass door merchandisers are designed for durability and visual appeal in promoting your product. Glass door merchandisers are energy efficient and effective at keeping product at exactly the right temperature to preserve freshness and prolong shelf life. Simple-touse, programmable solid-state digital controls deliver accurate temperature regulation. An oversized refrigeration system provides energy efficiency, rapid recovery and consistent minimal change in the

internal environment even if the door is opened frequently.





69K-116HC







69K-123HC (Doors: Sliding) 69K-113HC (Black, Doors: Sliding)

#### REFRIGERANT

Environmentally Friendly R290a

#### **ELECTRIC**

115/60Hz/1 Ph (NEMA 5-15)



NEMA 5-15P

# **FEATURES**

- Self-closing doors with magnetic gasket
- Double pane heated glass glass doors enhance energy efficiency inhibiting temperature loss and minimizing condensation
- Interior LED lighting
- Bottom mounted oversized compressor
- Twelve (12) heavy-duty, PE (polyethylene) coated wire shelves
- Pre-programmed automatic defrost cycle for ideal, trouble-free storage conditions
- Temperature reading visible from up to 15 feet away
- Door lock for security
- Four (4) rollers (2 with levelling feet swivel casters are an available option)
- Sliding door models are perfect for tight spaces

#### TEMPERATURE

- Holding temperature: 34° to 41°F (1° to 5°C)
- Digitally controlled system maintains optimum temperature
- Oversized refrigeration system provides rapid temperature recovery

#### CONSTRUCTION

- Exterior Material: Powder coated steel.
- Interior Material: Powder coated aluminium. Easy to clean, low maintenance.
- Integral condensate evaporator so there is no need for a floor drain
- Illuminated merchandising panel to promote product(s)







Friendly



Environmentally Exceeds today's energy consumption standards

### WARRANTY (USA / CANADA)

Three (3) year parts and on-site labor Five (5) year compressor

Administered by Central, 800-289-3637


Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



7750 Georgetown Road Indianapolis, IN 46268 800-289-3637 • Fax 800-882-0086

| Project Name: |                    |
|---------------|--------------------|
| Location:     |                    |
| Item #:       | Qty:               |
| Model:        |                    |
| www.Cen       | tralRestaurant.com |

## GLASS DOOR MERCHANDISER | 72 Cu Ft REFRIGERATOR

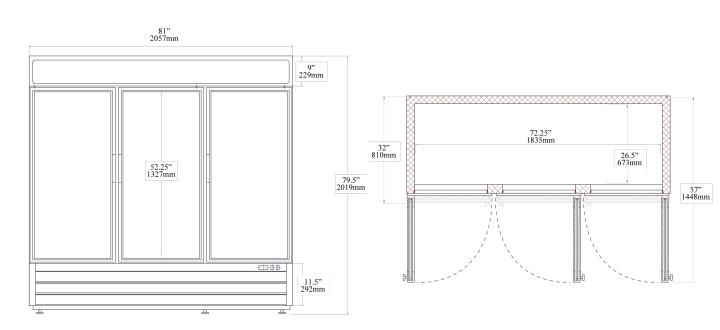

### Backlit Display Panel



|                                   | 69K-116HC / 69K-056HC / 69K-123HC / 69K-113HC |
|-----------------------------------|---|
|                                   |   |
| In: External Dimensions W x D X H | 81 x 32 x 79.5                                |
| mm: External Dimensions W x D X H | 2057 x 810 x 2019                             |
| In: Internal Dimensions W x D X H | 72.25 x 26.5 x 52.25                          |
| mm: Internal Dimensions W x D X H | 1835 x 673 x 1327                             |
| Nominal Capacity                  | 72 Cu Ft / 2039 L                             |
| R290a Charge Size                 | 5.29 oz                                       |
| Shelves                           | 12  |
| Max Amp Draw                      | 10 Amps                                       |
| Unit Weight                       | 618 lb / 280 kg                               |
| Shipping Weight                   | 670 lb / 305kg                                |

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.