

# SELF CONTAINED ICE MAKER

Model:  69K-080

International Model: Add -50 (220V/50Hz/1Ph)  
or -60 (220V/60Hz/1Ph)



The compact 69K-080 produces up to 65 pounds of ice per day (under ideal conditions) and includes a self-contained 25 pound storage bin. The unit produces crystal clear ice cubes and features a reversible stainless steel door. Suitable for freestanding or built in applications, this unit will run on standard household electrical current and is NSF and UL approved for commercial use.

### ICE PRODUCTION

Air Temp 70°F (21°C) Water Temp 50°F (10°C)  
Daily Ice Production: 65 lbs (23kg)  
Energy Consumption 10.1kWh/100lb of ice produced  
Water Usage 13.8 gal./100lb of ice produced

Air Temp 90°F (32°C) Water Temp 70°F (21°C)  
Daily Ice Production: 51 lbs (31kg)

Storage Bin holds 25lbs of ice with automatic overflow prevention  
Gravity Drain connection is required, along with a water supply line.

### OPERATING REQUIREMENTS

Ambient Temperature Range 50° to 99°F (10° to 37°C)  
Water Temperature Range 40° to 90°F (4° to 32°C)  
Water Supply Line Connection 1/4" O.D. Compression  
Water Pressure Range  
Min PSI 15 Max PSI 75 (above 75 requires a regulator)  
Min Bar 1.0 Max Bar 5.5

### FEATURES and CONSTRUCTION

- Exterior Material: Stainless Steel with Black Trim
- Air Cooled Compressor
- Built-In Self Cleaning Mode for use with nickel safe cleaning solution
- Includes: Scoop

• Tubing for Supply and Drain Lines  
NEMA 5-15 cord set for simple installation

\* A Water filter is recommended for a more efficient operation with less required maintenance and cleaning.

\* 3<sup>rd</sup> Party Approvals: ANSI NSF 12, ANSI UL 563 & DOE2017

### REFRIGERANT

- CFC & HCFC free R-134A

### ELECTRIC

120V/60Hz/1 Ph (NEMA 5-15P)  
(220V/50Hz/1ph available as an option)



Certified to  
ANSI-NSF 12



Certified to  
ANSI UL 563



### WARRANTY (USA / CANADA)

One (1) year parts


One (1) year on-site labor

Administered by Central, 800-289-3637

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Central Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

# SELF CONTAINED ICE MAKER

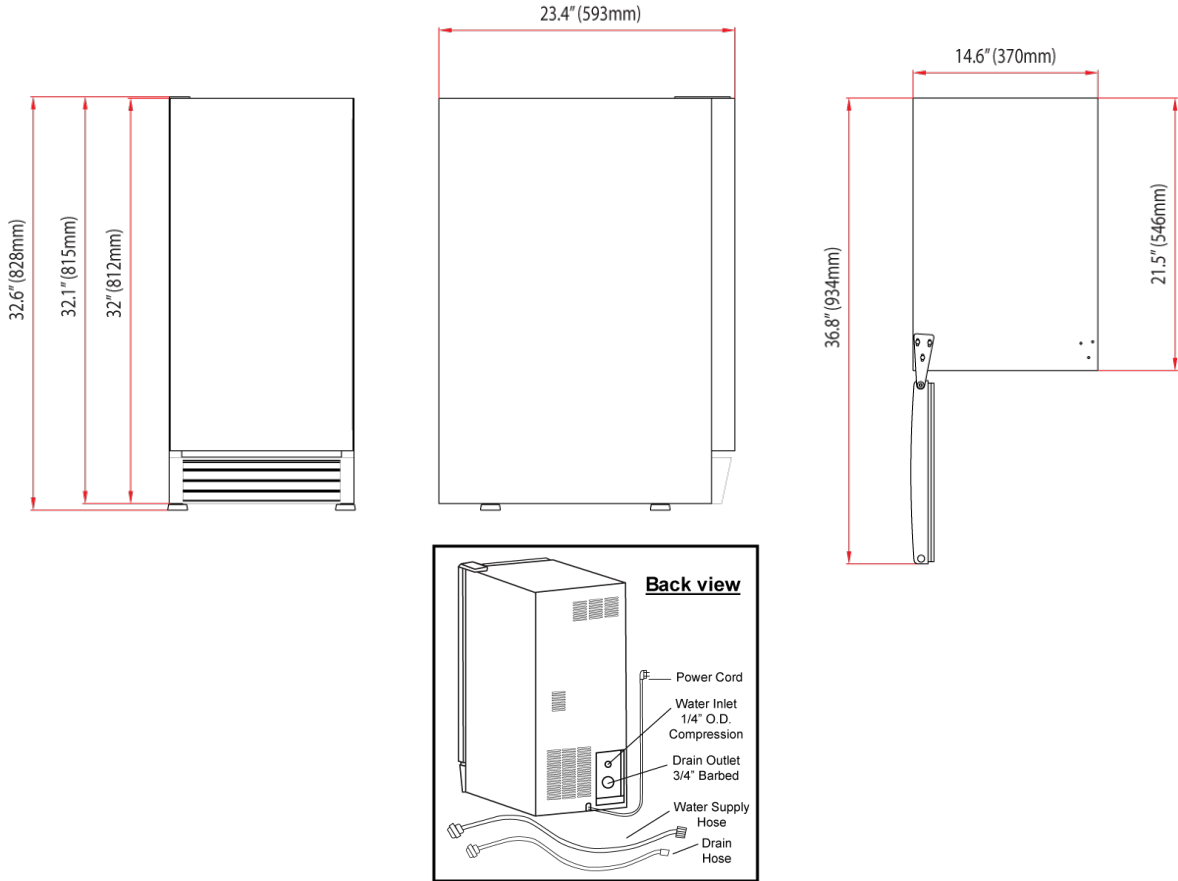

<b>69K-080</b>	
<b>In: External Dimensions W x D x H</b>	14.6 x 23.4 x 32.6
<b>mm: External Dimensions W x D x H</b>	370 x 593 x 828
<b>Average Amp Draw</b>	1.9
<b>Unit Weight</b>	84 lb / 38 kg
<b>Shipping Weight</b>	93 lb / 42 kg
<b>Production based on ambient conditions</b>	
<b>50°F Water / 70°F Air</b>	Up to 65 lbs of ice/day
<b>70°F Water / 90°F Air</b>	Up to 51 lbs of ice/day
<b>Ice Cube Produced (Dimensions)</b>	Clear Slab Cube (3/4 x 3/4 x 1" / 19 x 19 x 25mm)

Minimum cutout size for undercounter installation: 15" x 33"

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.