



7750 Georgetown Road  
Indianapolis, IN 46268  
800-289-3637 • Fax 800-882-0086

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

www.CentralRestaurant.com

# GLASS DOOR MERCHANDISER | 72 Cu Ft FREEZERS

Model:  69K-119 (White)  69K-059 (Black)



69K-119



69K-059  
(Color: Black)

Glass door merchandisers are designed for durability and visual appeal in promoting your product. Glass door merchandisers are energy efficient and effective at keeping product at exactly the right temperature to preserve freshness, prolong shelf life and prevent freezer burn. Simple-to-use, programmable solid-state digital controls deliver accurate temperature regulation. An oversized refrigeration system provides energy efficiency, rapid recovery and consistent minimal change in the internal environment even if the door is opened frequently.

## FEATURES

- Hinged Door Models: Self-closing, magnetic gasket
- Triple pane heated glass glass doors enhance energy efficiency by inhibiting heat loss and minimizing condensation
- Interior LED lighting
- Bottom mounted oversized compressor
- Twelve (12) heavy-duty, PE (polyethylene) coated wire shelves
- Pre-programmed automatic defrost cycle for ideal, trouble-free storage conditions
- Temperature reading visible from up to 15 feet away
- Door lock for security
- Four (4) rollers (2 with levelling feet – swivel casters are an available option)

## TEMPERATURE

- Holding temperature: -10° to 10°F (-23° to -12°C)
- Comes factory set to -4°F (-20°C)
- Digitally controlled system maintains optimum temperature
- Oversized refrigeration system provides rapid temperature recovery

## CONSTRUCTION

- Exterior Material: Powder coated steel.
- Interior Material: Powder coated aluminium. Easy to clean, low maintenance.
- Integral condensate evaporator so there is no need for a floor drain
- Illuminated merchandising panel to promote product(s)

**REFRIGERANT**  
CFC & HCFC free R-404A



NEMA L14-20

**ELECTRIC**  
208-230/60Hz/1 Ph 4 wire (NEMA L14-20)  
\* Requires a current protected, designated circuit



Certified to ANSI-NSF 7



Certified to ANSI UL 471



Environmentally Friendly



Exceeds today's energy consumption standards

## WARRANTY (USA / CANADA)


Three (3) year parts and on-site labor  
Two (2) year additional parts only compressor  
Administered by Central, 800-289-3637

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.


By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Central Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

**GLASS DOOR MERCHANDISER | 72 Cu Ft FREEZERS**

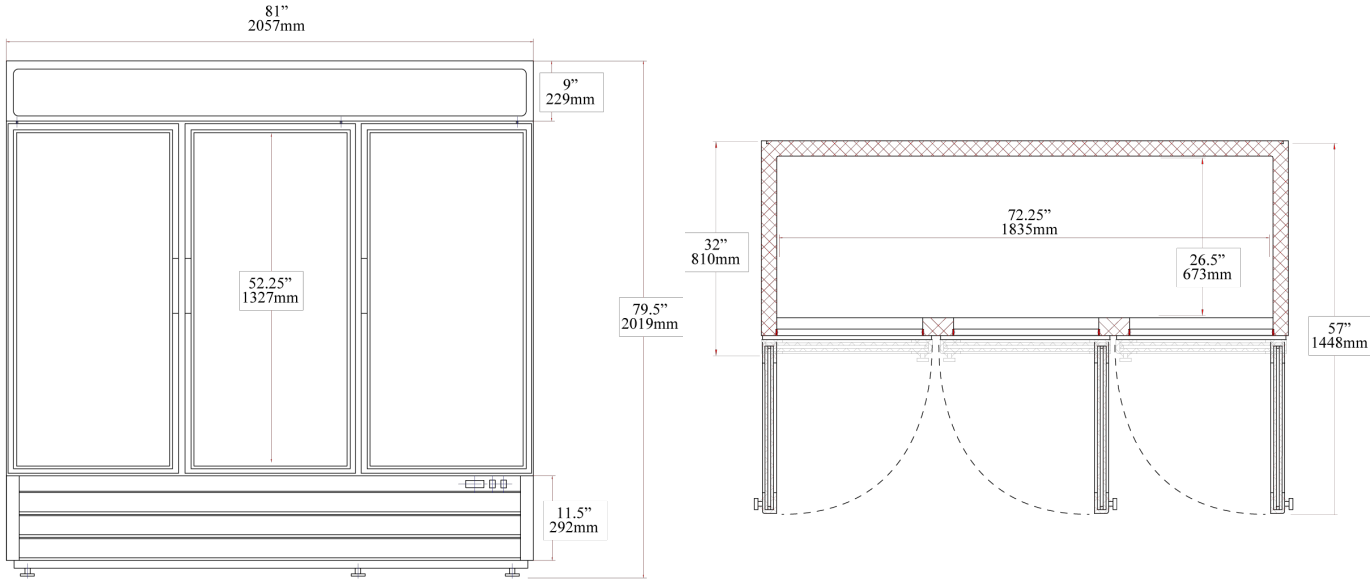

**Backlit Display Panel**



	<b>69K-119 / 69K-059</b>
<b>In: External Dimensions W x D x H</b>	81 x 32 x 79.5
<b>mm: External Dimensions W x D x H</b>	2057 x 810 x 2019
<b>In: Internal Dimensions W x D x H</b>	76.5 x 26.5 x 52.375
<b>mm: Internal Dimensions W x D x H</b>	1943 x 673 x 1330
<b>Nominal Capacity</b>	72 Cu Ft / 2039 L
<b>Shelves</b>	(12) shelves. (4) per door.
<b>Maxx Amp Draw</b>	12 Amps
<b>Unit Weight</b>	618 lb / 280 kg
<b>Shipping Weight</b>	670 lb / 305 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.