

# MODULAR ICE MAKERS (Bin Not Included)

Model:  69K-124

69K-125

International Model: Add -50 (220V/50Hz/1Ph)  
or -60 (220V/60Hz/1Ph)



**Half Dice Ice Cubes**  
Inches: 1/2 x 7/8 x 7/8  
mm: 13 x 22 x 22 mm

Modular ice maker. Can produce 475 to 915 pounds of ice per day (under the right conditions) depending on the model. Stainless steel construction provides durability to a unit that is low-maintenance and easy to clean. Vertical evaporator and proven ice making technology assures years of reliable ice production. These models can be stacked for even more ice production, if needed.

## ICE PRODUCTION

Air Temp 70°F (21°C) Water Temp 50°F (10°C)  
69K-125 Daily Ice Production: 615 lbs (278kg)  
69K-124 Daily Ice Production: 475 lbs (215kg)

Air Temp 90°F (32°C) Water Temp 70°F (21°C)  
69K-125 Daily Ice Production: 468 lbs (212kg)  
69K-124 Daily Ice Production: 368 lbs (164kg)

Storage Bin is Not Included. Maxx Ice has storage bins available. Gravity Drain connection is required, along with a water supply line.

## OPERATING REQUIREMENTS

Ambient Temp Range 45° to 99°F (7° to 37°C)  
Water Temp Range 40° to 90°F (4° to 32°C)  
Water Usage 100lbs (45.4kg) of Ice 16 Gallons (60.6 L)  
Water Supply Line Connection 3/8" FPT  
Water Pressure Range  
Min PSI 15 Max PSI 80 (above 80 requires a regulator)  
Min Bar 1.0 Max Bar 5.5  
Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)  
69K-125: 6.5 kWh/100 lb  
69K-124: 7.1 kWh/100 lb

## FEATURES and CONSTRUCTION

- Exterior Material: Stainless Steel
- Air Cooled Compressor
- Automatic Cleaning Cycle

\*A Water filter is recommended for a more efficient operation with less required maintenance and cleaning.

\* 3<sup>rd</sup> Party Approvals: ANSI NSF 12, ANSI UL 563 & DOE2017

## REFRIGERANT

- CFC & HCFC free R-404A

## ELECTRIC

69K-125 220V/60Hz/1 Ph (Hard Wired)  
69K-124 120V/60Hz/1 Ph (NEMA 5-15P)  
(220V/50-60Hz/1ph available as an option)



## WARRANTY (USA / CANADA)


One (1) year parts  
One (1) year on-site labor  
Administered by Central, 800-289-3637

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.


The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Central Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

# MODULAR ICE MAKERS (Bin Not Included)

## 69K-124 and 69K-125

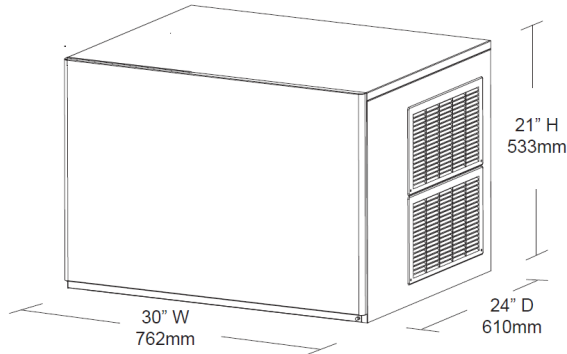

### As Shown on Bin (not included)

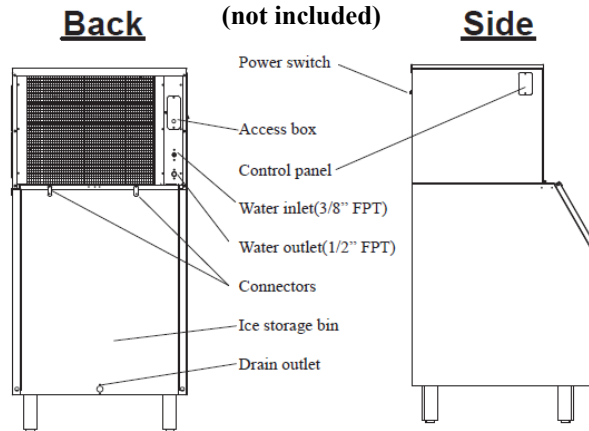

	69K-125	69K-124
<b>In: External Dimensions W x D x H</b>	30 x 24 x 21	30 x 24 x 21
<b>mm: External Dimensions W x D x H</b>	762 x 610 x 533	762 x 610 x 533
<b>Electrical Amp Draw</b>	10 Amps at 220V	15.3 Amps at 120V
<b>Unit Weight</b>	155 lbs (70 kg)	130 lbs (59 kg)
<b>Shipping Weight</b>	165 lbs (75 kg)	148 lbs (67 kg)
<b>Production based on ambient conditions</b>		
<b>50°F Water / 70°F Air</b>	Up to 615 lbs of ice/day	Up to 475 lbs of ice/day
<b>70°F Water / 90°F Air</b>	Up to 468 lbs of ice/day	Up to 368 lbs of ice/day
<b>Ice Cube Produced</b>	Half Dice Cube	Half Dice Cube

Installation must conform to applicable local codes and ordinances.

Use of a qualified licensed technician is suggested.

Gravity drain with adequate slope and no trap or flow interruption is required.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.