

GLASS DOOR REACH-IN REFRIGERATION

Model: 69K-129HC 69K-130HC



69K-129HC



69K-130HC

Central Glass Door Reach-In Refrigeration pairs durability and longevity with visual appeal. Featuring an energy efficient bottom mounted compressor, these glass door refrigerators effectively keep product at the ideal temperature to preserve freshness and extend shelf life. The simple to use but precise solid state digital controls allow for accurate and flexible use of the unit.

FEATURES

- 4" diameter swivel casters come standard
- Three (3) heavy-duty, adjustable, PE coated wire shelves per section
- Locking doors to prevent unauthorized access
- LED interior lighting
- Available in 115V/60Hz/1

TEMPERATURE


- Holding temperature: 34° to 41°F (1° to 5°C)
- Digitally controlled temperature regulation maintains optimum storage temperature
- LED display is easily viewed from exterior
- Automatic defrost system maintains the ideal storage conditions at all times

CONSTRUCTION

- Exterior and interior material: Durable, easy to clean stainless steel
- CFC-free polyurethane insulated walls and doors
- Oversized bottom mounted compressor delivers rapid cooling and temperature recovery
- Integral condensate evaporator eliminates need for a floor drain connection
- Dual-pane glass doors with heavy-duty hinges

REFRIGERANT
Environmentally-friendly R290a

ELECTRIC
120/60Hz/1 Ph (NEMA 5-15)



NEMA 5-15P



Intertek
Conforms to
ANSI-NSF 7



Intertek
Conforms to
ANSI UL 471



Environmentally
Friendly



Exceeds today's energy
consumption standards


WARRANTY (USA / CANADA)

Three (3) year parts and on-site labor
Five (5) year compressor


Administered by Central, 800-289-3637

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

GLASS DOOR REACH-IN REFRIGERATION

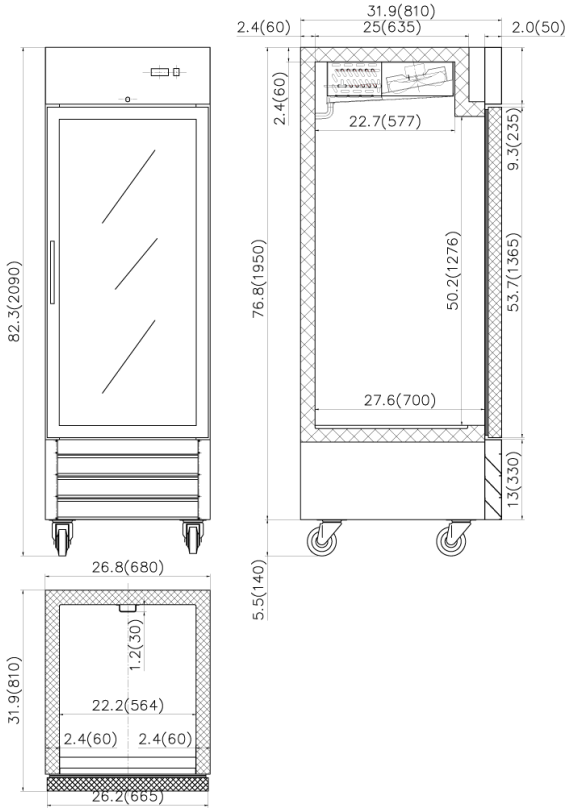

69K-129HC

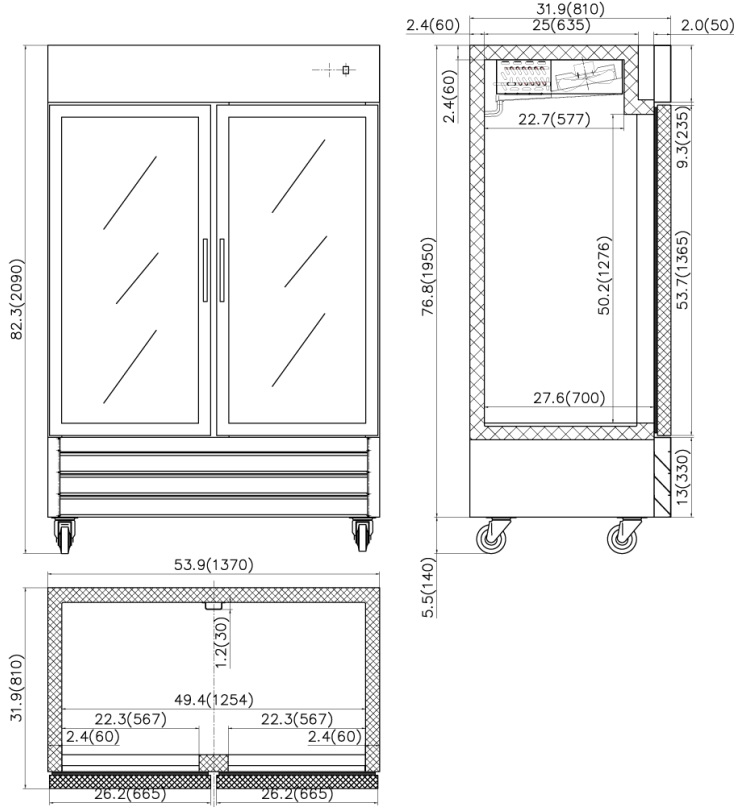

69K-130HC

	Exterior Dimensions in / mm	Interior Dimensions In / mm	Capacity	Temperature Range	Voltage	Max Amp Draw	Adjustable Shelves	R290a Charge Size	Unit Weight	Shipping Weight
69K-129HC	26.8 x 31.9 x 82.3 681 x 810 x 2090	22.2 x 27.6 x 50.2 564 x 700 x 1276	23 Cu Ft 603 L	33°-41°F 1°-5° C	115V/60Hz/1	6	3	3 oz	293 lb 133 kg	366 lb 166 kg
69K-130HC	53.9 x 31.9 x 82.3 1370 x 810 x 2090	49.4 x 27.6 x 50.2 1254 x 700 x 1276	49 Cu Ft 512.5 L	33°-41°F 1°-5° C	115V/60Hz/1	9	6	3.7 oz	478.4 lb 217 kg	597 lb 272 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.