



KRATOS EQUIPMENT  
 7750 Georgetown Road, Indianapolis, IN 46268  
 Sales: (317) 634-2550  
 Tech Service: (887) 368-2797

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Model: \_\_\_\_\_

# SOLID DOOR BACK BAR COOLERS

Model:  69K-731HC  69K-722HC  69K-736HC



69K-731HC



69K-722HC



69K-736HC

Back Bar Coolers are an excellent option for keeping bottled or canned beverages at their ideal serving temperature. The spacious stainless steel interior houses a LED light to illuminate the stored contents. Units are built to perform in either built-in, stationary, or mobile applications. The forced air, oversized refrigeration system with solid-state digital controls provides a consistent holding environment and rapidly cools the contents.

## FEATURES

- Door locks for security
- Bright, long lasting and energy efficient LED lighting.
- Solid State Controls. Easy-to-adjust and monitor and delivers reliable, consistent performance.
- Foamed in place, high R-value urethane insulation
- 5" casters (front 2 lock in place) for mobility. Can be placed on stationary leveling legs.
- Includes internal condensate evaporator, so no drain hook-ups are needed.
- NEMA 5-15 cord set included

## TEMPERATURE

- Holding temperature: 34° to 41°F (1° to 5° C)
- Automatic programmable defrost cycle ensures the selected holding temperature is continuously maintained.
- Forced air cooling delivers consistent holding temperatures that will rapidly cool the contents.

## CONSTRUCTION

- Exterior Material: Steel painted black
- Interior Material: Stainless Steel
- Countertop: Stainless Steel
- Shelving: Heavy duty PVC coated wire shelves
  - 69K-731HC / 69K-722HC: Four (4) adjustable shelves
  - 69K-736HC: Six (6) adjustable shelves

## REFRIGERANT

Environmentally-friendly R290a

## ELECTRIC

120/60Hz/1 Ph (NEMA 5-15)



Intertek  
 Conforms to  
 ANSI-NSF 7



Intertek  
 Conforms to  
 ANSI UL 471



Environmentally  
 Friendly



DOE 2017  
 Compliant

## KRATOS WARRANTY (USA / CANADA)

One (1) year parts  
 One (1) year on-site labor  
 Four (4) additional years (Five (5) total) for the compressor (part only)  
 Administered by KRATOS EQUIPMENT, 887.368.2797  
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.







The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each KRATOS will deliver years of trouble free, reliable, low maintenance, efficient operation.



KRATOS EQUIPMENT  
 7750 Georgetown Road, Indianapolis, IN 46268  
 Sales: (317) 634-2550  
 Tech Service: (887) 368-2797

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Model: \_\_\_\_\_

# SOLID DOOR BACK BAR COOLERS

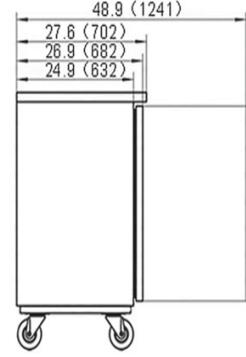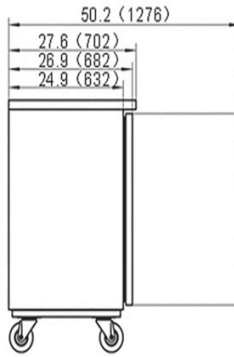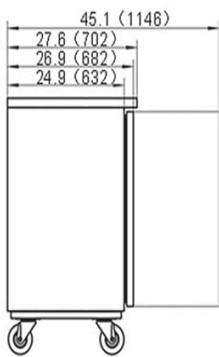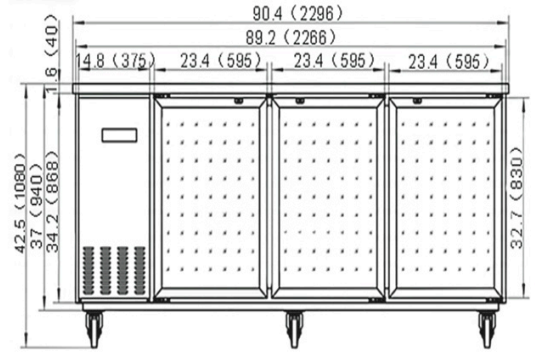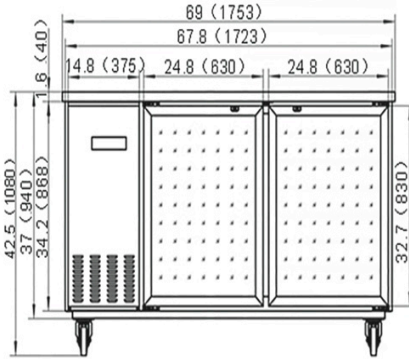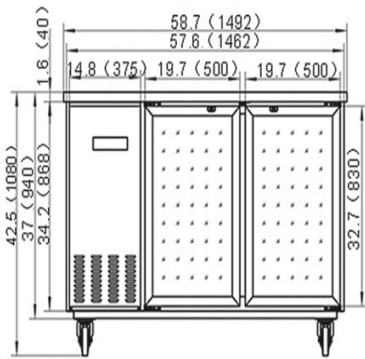

69K-731HC

69K-722HC

69K-736HC

	69K-731HC	69K-722HC	69K-736HC
	** Dimensions include 5" (127mm) Caster height **		
<b>In: External Dimensions W x D x H</b>	58.7 x 27.6 x 42.5	69.2 x 27.6 x 42.5	90.4 x 27.6 x 42.5
<b>mm: External Dimensions W x D x H</b>	1492 x 702 x 1080	1753 x 702 x 1080	2296 x 702 x 1080
<b>Capacity</b>	13.8 Cu Ft / 390 L	14.5 Cu Ft / 410 L	25.3 Cu Ft / 716 L
<b>Doors</b>	2	2	3
<b>Shelves</b>	4	4	6
<b>Max Amp Draw</b>	5	6.25	7
<b>R290a Charge Size</b>	3.88 oz	3.88 oz	4.59 oz
<b>Can / Bottle Capacity</b>	528 Cans / 240 Bottles	775 Cans / 352 Bottles	1254 Cans / 570 Bottles
<b>Unit Weight</b>	276 lb / 125 kg	300 lb / 136 kg	346 lb / 157 kg
<b>Shipping Weight</b>	302 lb / 137 kg	355 lb / 161 kg	412 lb / 187 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.