



KRATOS EQUIPMENT
 7750 Georgetown Road, Indianapolis, IN 46268
 Sales: (317) 634-2550
 Tech Service: (887) 368-2797

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

UNDERCOUNTER FREEZERS

Model: 69K-766HC
1 Door

69K-764HC
2 Door

69K-753HC
2 Doors

International Model:
Add -50 (220V/50Hz/1Ph)



69K-766HC
1 Door



69K-764HC
2 Door



69K-753HC
2 Door

KRATOS Undercounter Freezers hold your products at their ideal storage conditions, promote longer shelf life, preserve freshness and avoid freezer burn. These undercounter freezers are energy and space efficient and easily serviced. The corrosion-resistant stainless steel exterior provides durability and ensures years of reliable service if properly maintained. A programmable, solid-state control system delivers precise temperature regulation.

FEATURES

- Easy to grip, stainless steel, self-closing doors with integrated door handles
- 4 Casters (2 locking, 2 non-locking)
- Integrated condensate evaporator pan eliminates the need for a floor drain connection
- Available in various sizes to suit your spatial and storage volume application requirements

TEMPERATURE


- Holding temperature: -10° to 10°F (-23° to -23°C)
- Factory set at -4°F (-20°C)
- Efficient, forced-air refrigeration system delivers even temperature regulation throughout the food storage compartment
- Automatic defrost system to maintain peak performance
- Programmable solid state control scheme with digital temperature display visible up to 15 feet away
- Oversized refrigeration and efficient foam insulation provide for rapid recovery and excellent temperature regulation

CONSTRUCTION

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Easy to clean painted aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Adjustable PE-coated shelves (one per section/door)
- Rear-accessed utility compartment provides space efficiency as well as easier servicing while conserving energy consumption
- Easily replaceable dart-style magnetic compression gaskets

REFRIGERANT

Environmentally-friendly R-290A, with the lowest global warming potential value (3) of any commercially available refrigerant



NEMA 5-15P

ELECTRIC

115/60Hz/1 Ph (NEMA 5-15)



Intertek
Conforms to
ANSI-NSF 7



Intertek
Conforms to
ANSI UL 471



Environmentally
Friendly



EPA
Approved
Insulation &
Refrigerant



DOE 2017
Compliant

KRATOS WARRANTY (USA / CANADA)

One (1) year parts
 One (1) year on-site labor
 Four (4) additional years (Five (5) total) for the compressor (part only)
 Administered by KRATOS EQUIPMENT, 887.368.2797
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.


The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each KRATOS will deliver years of trouble free, reliable, low maintenance, efficient operation.



KRATOS EQUIPMENT
 7750 Georgetown Road, Indianapolis, IN 46268
 Sales: (317) 634-2550
 Tech Service: (887) 368-2797

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

UNDERCOUNTER FREEZERS

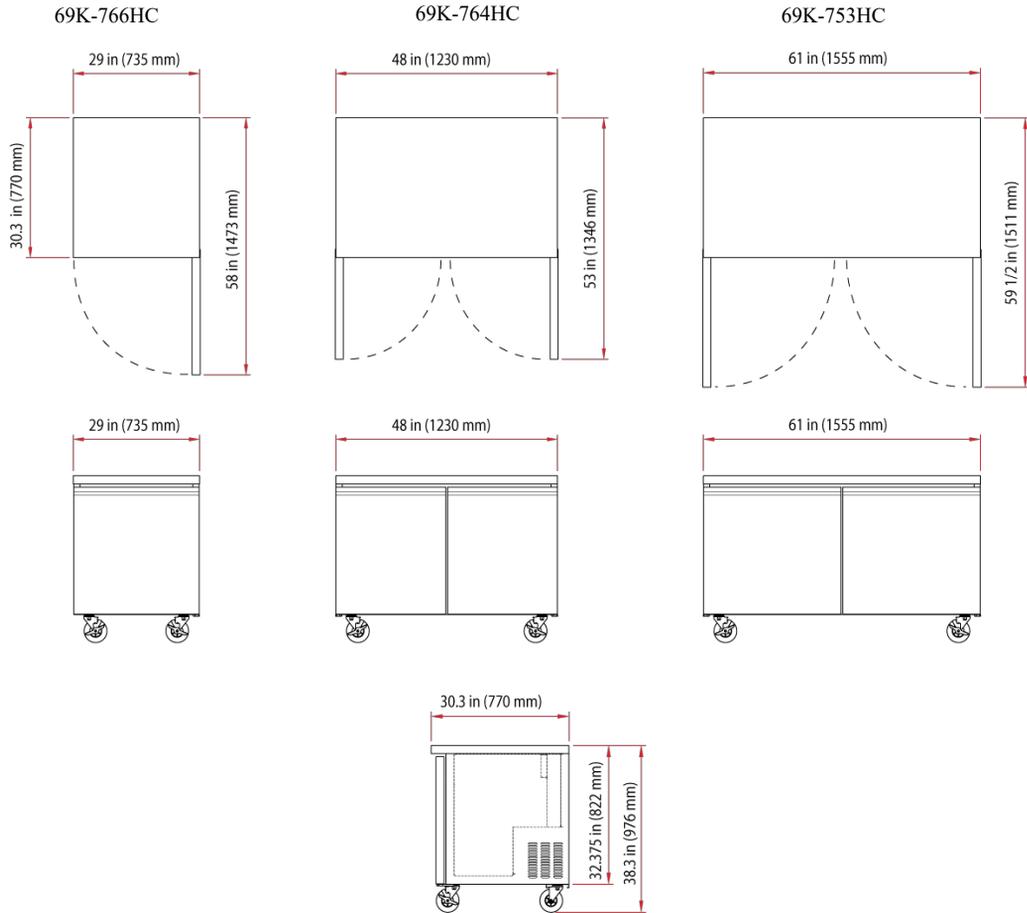

*Shorter or taller optional caster sets are available to suit your application requirements

	Exterior Dimensions in / mm	Interior Dimensions in / mm	Depth With Door(s) Open in / mm	Storage Capacity	R290a Charge Size	Average Amp Draw	Shelves	Unit Weight	Shipping Weight
69K-766HC	29 x 30.3 x 38.3 735 x 770 x 976	24 x 23.4 x 26.6 610 x 636 x 676	58 / 1473	6.7 Cu Ft 184 L	2 oz	3.6	1	143 lb 65 kg	175 lb 79 kg
69K-764HC	48 x 30.3 x 38.3 1230 x 770 x 976	43 x 23.4 x 26.6 1105 x 636 x 676	53 / 1346	11.1 Cu Ft 340 L	3.5 oz	4.3	2	242 lb 110 kg	275 lb 125 kg
69K-753HC	61 x 30.3 x 38.3 1555 x 770 x 976	56 x 23.4 x 26.6 1430 x 636 x 676	59.5 / 1511	14.1 Cu Ft 439 L	4.2 oz	5.6	2	265 lb 120 kg	298 lb 135 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.