



KRATOS EQUIPMENT  
 7750 Georgetown Road, Indianapolis, IN 46268  
 Sales: (317) 634-2550  
 Tech Service: (887) 368-2797

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Model: \_\_\_\_\_

# SANDWICH/SALAD PREP TABLES

Model:  69K-769HC 1 Door     69K-770HC 2 Door     69K-771HC 2 Doors



69K-769HC



69K-770HC



69K-771HC

KRATOS Sandwich Prep Tables are an energy efficient, productive and ergonomically-friendly way to prepare a variety of menu items. Hinged food covers keep the food well contents fresh and cool throughout the day. A high quality stainless steel exterior delivers years of reliable operation and easy cleaning.

### FEATURES

- Solid stainless steel doors with easy to grip, integrated handles
- 4 Casters (2 locking, 2 non-locking)
- Comes with removable, reversible cutting board
- Integrated condensate evaporator pan eliminates the need for a floor drain connection
- Available in various lengths/capacities to suit your storage and layout needs

### TEMPERATURE


- Holding temperature: 34° to 41°F (1° to 5°C)
- Utilizes environmentally friendly refrigerant R290A
- Factory set at 38°F
- Programmable solid state control scheme with digital temperature display visible up to 15 feet away
- Oversized, forced-air refrigeration system delivers even temperature regulation and air circulation throughout the appliance

### CONSTRUCTION

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Easy to clean painted aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Dart style magnetic compression gaskets are replaceable without requiring tools
- Heavy duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Open well is designed to hold 1/3, 1/2 or Full Size pans without requiring adapters
- Open well includes slots for industry standard adapter bars to allow use of 1/6 pans

### REFRIGERANT

Environmentally-friendly R-290A, with the lowest global warming potential value (3) of any commercially available refrigerant



NEMA 5-15P

### ELECTRIC

115/60Hz/1 Ph (NEMA 5-15)

Intertek	Intertek	Environmentally Friendly	EPA Approved Insulation & Refrigerant	DOE 2017 Compliant
Conforms to ANSI-NSF 7	Conforms to ANSI UL 471			

### KRATOS WARRANTY (USA / CANADA)

One (1) year parts  
 One (1) year on-site labor  
 Four (4) additional years (Five (5) total) for the compressor (part only)  
 Administered by KRATOS EQUIPMENT, 887.368.2797  
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.


The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each KRATOS will deliver years of trouble free, reliable, low maintenance, efficient operation.



KRATOS EQUIPMENT  
 7750 Georgetown Road, Indianapolis, IN 46268  
 Sales: (317) 634-2550  
 Tech Service: (887) 368-2797

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Model: \_\_\_\_\_

# SANDWICH/SALAD PREP TABLES

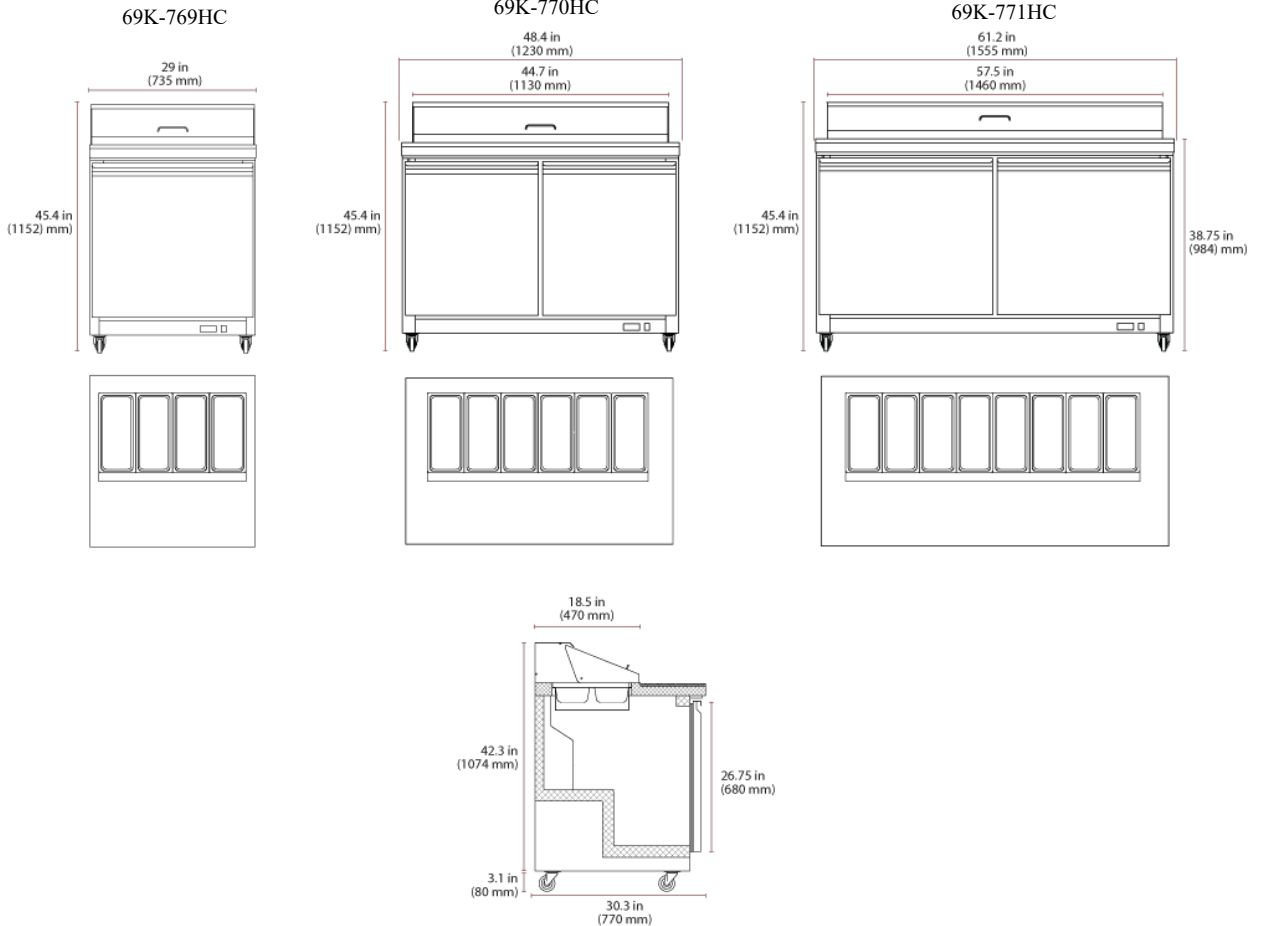

\*Shorter or taller optional caster sets are available to suit your application requirements

	Exterior Dimensions in / mm	Interior Dimensions in / mm	Depth With Door(s) Open in / mm	Storage Capacity	R290a Charge Size	Average Amp Draw	Shelves	Pan Capacity 1/3 (1/6)	Unit Weight	Shipping Weight
<b>69K-769HC</b>	29 x 30.3 x 45.4 735 x 770 x 1152	24 x 25 x 26.6 610 x 636 x 676	58 / 1473	7.59 Cu Ft 215 L	2 oz	3.6	1	4 (8)	150 lb 68 kg	181 lb 82 kg
<b>69K-770HC</b>	48.4 x 30.3 x 45.4 1230 x 770 x 1152	43.5 x 25 x 26.6 1105 x 636 x 676	53 / 1346	13.77 Cu Ft 390 L	2.5 oz	4.3	2	6 (12)	256 lb 116 kg	290 lb 131 kg
<b>69K-771HC</b>	61.2 x 30.3 x 45.4 1555 x 770 x 1152	56.3 x 25 x 26.6 1430 x 636 x 676	59.5 / 1511	17.83 Cu Ft 505 L	3.5 oz	5.6	2	8 (16)	298 lb 135 kg	338 lb 153 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.  
 While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.  
 By using the information provided, the user assumes all risks in connection with such use.