



KRATOS EQUIPMENT
 7750 Georgetown Road, Indianapolis, IN 46268
 Sales: (317) 634-2550
 Tech Service: (887) 368-2797

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

KEG COOLERS WITH TOWERS

Model: 69K-832HC 69K-833HC 69K-834HC



69K-832HC



69K-833HC



69K-834HC

KRATOS Keg Coolers with direct draw beer towers feature a sanitary stainless steel top and black powder coated steel exterior for durability and easy cleaning. Forced air refrigeration system distributes cold air evenly to keep the cabinet contents cooled at the optimum serving temperature. Standard 3-inch polished stainless steel draft tower dispensers are mounted to the stainless steel counter with integral drain trough and are cooled by continuous cold air circulation through a directed cold air distribution system. This maintains a cold product and tap serving temperature that reduces foam.

FEATURES

- 3" (77mm) diameter stainless steel insulated beer tower(s)
- Insulated door(s) with lock and key set
- 4" Caster Set Is Included (shorter casters and stationary levelling legs are an available option)

TEMPERATURE

- Holding temperature: 34° to 41°F (1° to 5°C)
- Factory set at 36°F
- Self-contained forced air refrigeration system cools the base cabinet and tower, maintaining an even temperature throughout the unit
- Digital solid-state controls allow for easily selected and adjusted temperature setting

CONSTRUCTION

- Black powder coated steel exterior
- White powder coated steel interior
- Stainless steel interior floor plate included to prevent damage or denting
- Stainless steel top
- High R-value CFC-free foamed in place polyurethane 2"/50mm insulated walls and doors
- Slide out condensing unit for easy cleaning and servicing
- Epoxy coated evaporator coils to resist corrosion
- Operation requires CO2 tank and regulator (not included)


**It is suggested that your beer distributor hook up this appliance initially for proper dispensing, show the operators how to store and change the kegs as well as teaching them the needed sanitation and cleaning procedures to serve your customers cold, fresh & delicious product*

REFRIGERANT

69K-832HC: R600a
 69K-833HC/69K-834HC: R290a

ELECTRIC

115/60Hz/1 Ph (NEMA 5-15)



NEMA 5-15P



Intertek
 Conforms to
 ANSI-NSF 7



Intertek
 Conforms to
 ANSI UL 471



Environmentally
 Friendly



DOE 2017
 Compliant

KRATOS WARRANTY (USA / CANADA)

One (1) year parts
 One (1) year on-site labor
 Four (4) additional years (Five (5) total) for the compressor (part only)
 Administered by KRATOS EQUIPMENT, 887.368.2797
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each KRATOS will deliver years of trouble free, reliable, low maintenance, efficient operation.




KRATOS EQUIPMENT
 7750 Georgetown Road, Indianapolis, IN 46268
 Sales: (317) 634-2550
 Tech Service: (887) 368-2797



Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

KEG COOLERS WITH TOWERS

69K-832HC

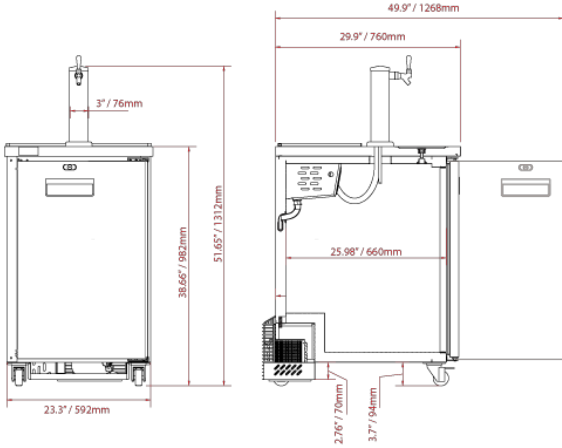


69K-833HC

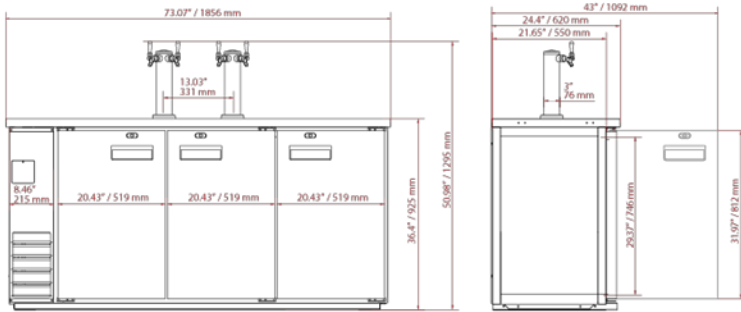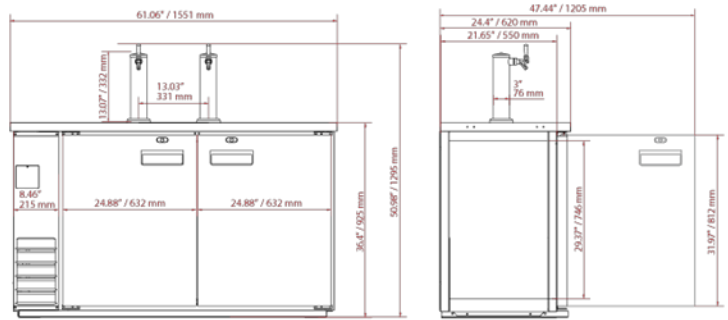

69K-834HC

TYPICAL KEG SIZES



QUARTER BARREL: 16.125 x 13.375, 7.75 Gallons
 SLIM QUARTER: 11.125 x 23.375, 7.75 Gallons
 HALF BARREL: 16.125 x 23.375, 15.5 Gallons

	Dimensions* in / mm	Capacity	Temperature Range	Charge Size	Peak Amp Draw	Unit Weight	Shipping Weight	Rated Refrigeration System HP
69K-832HC	23.3 x 29.9 x 51.65 592 x 760 x 1312	7.2 Cu Ft 204 L	34° - 41°F 1° - 5° C	R600a / 2.82 oz	2.2	132 lb 60 kg	161 lb 73 kg	1/8
69K-833HC	61.06 x 24.4 x 50.98 1551 x 620 x 1295	14.2 Cu Ft 402 L	34° - 41°F 1° - 5° C	R290a / 3.88 oz	3	275 lb 125kg	304 lb 138 kg	2/5
69K-834HC	73.07 x 24.4 x 50.98 1856 x 620 x 1295	17.3 Cu Ft 490 L	34° - 41°F 1° - 5° C	R290a / 4.59 oz	3	318 lb 145 kg	351 lb 159 kg	1/2

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.
 While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.
 By using the information provided, the user assumes all risks in connection with such use.