

Project Name: _
Location:
Item #:
Model:

Qty: ____

69K-902 UNDERCOUNTER ICE MACHINE - FULL DICE

MODEL: 69K-902



69K-902

ELECTRIC -

115V / 60Hz / 1Ph International voltage available 6' (2m) NEMA 5-15P cord set included

3RD PARTY APPROVALS









Zero Ozone Depletion Potential

NEMA 5-15P

KRATOS ICE WARRANTY (USA) -

One (1) year parts and on-site labor

Contact Central Restaurant Products for warranty statement at www.centralrestaurant.com or 888.908.8051

The Kratos Ice 69K-902 self-contained, air-cooled ice machine is perfect for any freestanding or built-in application. Each unit features a self-contained storage bin and a durable, easy to clean stainless steel and black plastic trim exterior. The easy-touse controls, front-breathing design with vertical evaporator with its proven ice making technology will deliver years of reliable ice production.

FEATURES AND CONSTRUCTION -

- Stainless steel exterior with black plastic trim •
- Air cooled compressor .
- Programmable, solid state, digital electronic control system
- Built-in self cleaning mode
- Includes scoop
- Includes tubing for supply and drain lines
- Polyethylene storage bin liner for improved sanitation

DAILY ICE PRODUCTION -

Air Temp 70°F (21°C) / Water Temp 50°F (10°C) 69K-902 80 lbs (36 kg)

Air Temp 90°F (32°C) / Water Temp 70°F (21°C)

ICE BIN STORAGE CAPACITY —


69K-902 25 lbs (11 kg)

OPERATING REQUIREMENTS -

Ambient Air Temperature Range 50° to 100°F (10° to 38°C)							
Water Temperature Range 41° to 90°F (5° to 32°C)							
Water Usage per 100 lbs of ice 21 Gallons (80L)							
Water Supply Line Connection 3/8" FPT							
Water Pressure Range:							
Min PSI 15 N	flax PSI75*						
Min Bar 1.0 N	lax Bar5.5						
*Above 75 PSI requires a regulator							
Energy Consumption per 100 lbs of ice:							
69K-90211.96 kWh/100 lbs							



69K-902 UNDERCOUNTER ICE MACHINE - FULL DICE

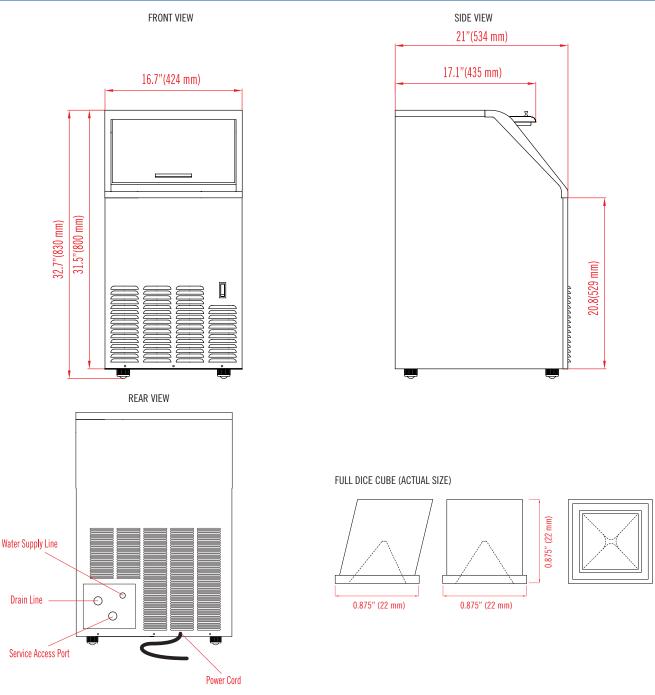

MODEL	EXTERNAL DIMENSIONS	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE Capacity	NET WEIGHT / Shipping weight	AMP DRAW (Making / Harvesting)	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
69K-902	16.7" x 21" x 32.7" (424 x 534 x 830 mm)	80 lbs (36 kg)	25 lbs (11kg)	93 lbs (42 kg) 104 lbs (47 kg)	3.8A / 4.7A	R-134a 8.47oz (240g)	115V / 60Hz / 1Ph

INSTALLATION

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation •
- A gravity drain line is required to install this ice machine •
- For optimal performance, the use of a water filter is recommended •

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we

01/17/23 exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the

specifications. By using the information provided, the user assumes all risks in connection with such use.