



Model: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Project: \_\_\_\_\_



(18-24-7 shown)

**1800 or 2100 Series Available**  
 (see reverse)

### Accessories


- Standard Single Tier Keyhole Speedrail (available sizes: 24", 30", 36", and 48")
- Standard Double Tier Keyhole Speedrail (available sizes: 24", 30" and 36")
- Upgrade to Eight Circuit Cold Plate
- Stainless Steel Divider (specify ice bin model)
- Perforated bottom (on units without cold plates)
- Stainless Steel Sliding Cover (specify ice bin model and if bottle holders are bring used)
- Condiment Tray
- 3-Well Bottle Holder (two included with all ice bins)
- Stainless Steel Legs (upgrade)
- Bottle Wells

- **Interior:**  
20 gauge stainless steel with 3/8" radius corners welded and sealed. Available in 12" and 15" depth.
- **Cold Plate:**  
Cast aluminum post mix plate with seven circuits. Plate is sealed into bottom. Each circuit is 5/16" OD stainless steel tubing. Two full with remainder to be half circuits. Bump and swedge fittings on ends.
- **Front Apron:**  
22 gauge stainless steel clad over 20 gauge galvanized.
- **Backsplash:**  
22 gauge stainless steel.
- **Sides:**  
20 gauge stainless steel.
- **Back and Bottom:**  
20 gauge galvanized.
- **Legs:**  
1-5/8" tubular 16 gauge galvanized steel. Each leg to have grey plastic bullet foot.
- **Plumbing:**  
1/2" IPS drain connection with cold plate (4" nipple provided).  
1" IPS drain connection without cold plate.

Approved By: \_\_\_\_\_


Model: \_\_\_\_\_ Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_ Project: \_\_\_\_\_

### 1800 Series

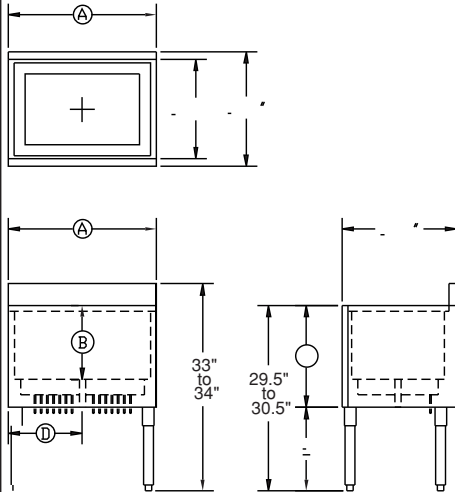

Model Numbers	Length Ⓐ	Bin Depth Ⓑ	Overall Depth Ⓒ	Left Side to Drain Ⓓ	Inside Bin. Dim.	Cold Plate Circuits	Ice Capacity lbs	Leg Size Ⓔ	Weight lbs
18-24	2'-0"	12"	13.5"	12"	15" x 22"	-	80	16"	55
18-30	2'-6"	12"	13.5"	15"	15" x 28"	-	97	16"	65
18-36	3'-0"	12"	13.5"	18"	15" x 34"	-	115	16"	69
18-24-7	2'-0"	12"	16.5"	12"	15" x 22"	7	80	13"	105
18-30-7	2'-6"	12"	16.5"	15"	15" x 28"	7	97	13"	113
18-36-7	3'-0"	12"	16.5"	18"	15" x 34"	7	115	13"	115
18-24DP	2'-0"	15"	16.5"	12"	15" x 22"	-	100	13"	62
18-30DP	2'-6"	15"	16.5"	15"	15" x 28"	-	120	13"	69
18-36DP	3'-0"	15"	16.5"	18"	15" x 34"	-	138	13"	80
18-24DP-7	2'-0"	15"	19.5"	12"	15" x 22"	7	100	10"	132
18-30DP-7	2'-6"	15"	19.5"	15"	15" x 28"	7	120	10"	135
18-36DP-7	3'-0"	15"	19.5"	18"	15" x 34"	7	138	10"	145

### 2100 Series

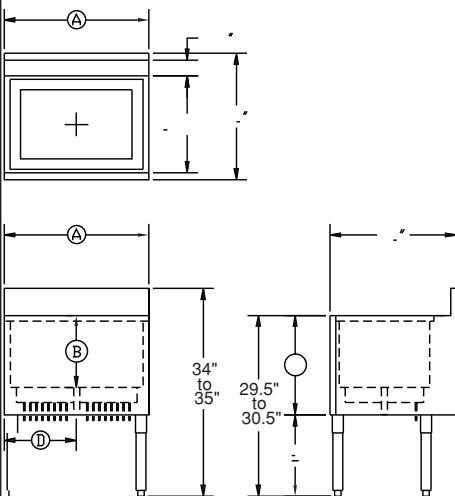

Model Numbers	Length Ⓐ	Bin Depth Ⓑ	Overall Depth Ⓒ	Left Side to Drain Ⓓ	Inside Bin. Dim.	Cold Plate Circuits	Ice Capacity lbs	Leg Size Ⓔ	Weight lbs
21-24	2'-0"	12"	13.5"	12"	15" x 22"	-	80	16"	55
21-30	2'-6"	12"	13.5"	15"	15" x 28"	-	97	16"	65
21-36	3'-0"	12"	13.5"	18"	15" x 34"	-	115	16"	80
21-24-7	2'-0"	12"	16.5"	12"	15" x 22"	7	80	13"	120
21-30-7	2'-6"	12"	16.5"	15"	15" x 28"	7	97	13"	130
21-36-7	3'-0"	12"	16.5"	18"	15" x 34"	7	115	13"	135
21-24DP	2'-0"	15"	16.5"	12"	15" x 22"	-	100	13"	65
21-30DP	2'-6"	15"	16.5"	15"	15" x 28"	-	120	13"	80
21-36DP	3'-0"	15"	16.5"	18"	15" x 34"	-	138	13"	95
21-24DP-7	2'-0"	15"	19.5"	12"	15" x 22"	7	100	10"	150
21-30DP-7	2'-6"	15"	19.5"	15"	15" x 28"	7	120	10"	155
21-36DP-7	3'-0"	15"	19.5"	18"	15" x 34"	7	138	10"	160

#### Mechanical Requirements:

- 1" IPS Drain Connection without Cold Plate.
- 1/2" IPS Drain Connection with Cold Plate.

Approved By: \_\_\_\_\_