
# C2410C EZ-FIT® CUP DISPENSER INSTALLATION INSTRUCTIONS

I. CUT HOLE IN COUNTER SURFACE




- 2. REMOVE TRIM RING TURNING COUNTER CLOCKWISE
- 3. SECURE CUP DISPENSER TO COUNTER WITH SUPPLIED SCREWS

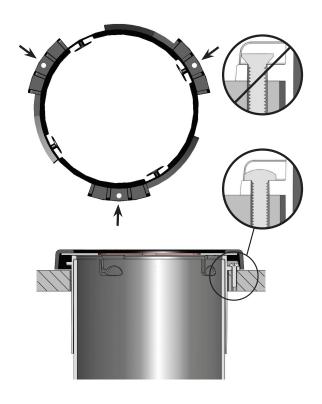

4. SELECT PROPER SIZE GASKET FOR CUP (SEE TABLE ON BACK)


5. INSTALL GASKET OVER POSTS IN UNDERSIDE OF RING

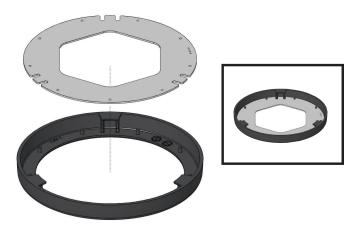

6. REPLACE COVER RING WITH GASKET BY TURNING CLOCKWISE OVER MOUNTING RING UNTIL SECURE



7. LOAD CUPS THROUGH GASKET



**REPLACEMENT PARTS & ACCESSORIES** (see reverse side for replacement gaskets)

X24MT Black Mounting Ring (new low profile)
X24TR Black Trim Ring (new low profile)
XC24KIT Replacement Trim Rings (old & new)

C2415 Spring
C2413BK End Cap
100458BK Cup Pusher

C2412SV C24XC Wire Cage for Surface Mount Chrome Finish Trim Ring


## **GASKET SIZING GUIDE**

|                                 |                             |                                   |                | RE           | PLACEMENT GA | ASKET KITS                       |
|---------------------------------|-----------------------------|-----------------------------------|----------------|--------------|--------------|----------------------------------|
| Approximate Cup<br>Rim Diameter |                             | Approximate Cup<br>Size Range     | Gasket<br>Size | Part Numbers |              | Quantity<br>of Gaskets<br>in Kit |
| minimum                         | maximum                     |                                   |                | black        | white        |                                  |
| 2 <sup>7</sup> /8" (73 mm)      | 3 <sup>1</sup> /8" (79 mm)  | 8 oz (236 mL) to 14 oz (414 mL)   | SMALL          | XC2422SBK    | XC2422S      | 3                                |
| 3½" (89 mm)                     | 3 <sup>7</sup> /8" (98 mm)  | 16 oz (474 mL) to 24 oz (710 mL)  | MEDIUM         | XC2422MBK    | XC2422M      | 3                                |
| 4 <sup>3</sup> /16" (106 mm)    | 4 <sup>3</sup> /8" (111 mm) | 32 oz (947 mL)                    | LARGE          | XC2422LBK    | XC2422L      | 3                                |
| 4½" (114 mm)                    | 43/4" (121 mm)              | 32 oz (947 mL) to 46 oz (1360 mL) | EXTRA LARGE    | XC2422XLBK   | XC2422XL     | 3                                |

Additional intermediate gasket sizes are available. Please call Customer Care for more information.


| XC2426          |   |
|-----------------|---|
| One each-Small, | 4 |
| Medium, Large,  |   |
| Extra Large     |   |

## **HOW TO DETERMINE WHICH GASKET TO USE**



- I. Turn cup upside down.
- 2. Affix gasket over cup. Gasket should rest about <sup>2</sup>/<sub>3</sub> of the way down from rim of cup.
- When gasket fits appropriately, this indicates the correct gasket size to use.

# SMALL GROUPING OF HOLES ON EDGE INDICATE GASKET SIZE (SEE CHART)

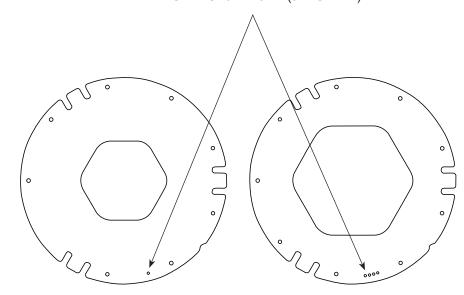

| # OF<br>HOLES | GASKET SIZE | PART #   |
|---------------|-------------|----------|
| •             | SMALL       | XC2422S  |
|               |             | 71021220 |
| 0 0           | MEDIUM      | XC2422M  |
| 0 0 0         | LARGE       | XC2422L  |
| 0 0 0 0       | EXTRA LARGE | XC2422XL |

#### San Jamar

555 Koopman Lane Elkhorn, Wisconsin 53121 USA

T: +1.262.723.6133 F: +1.262.723.4204 info@sanjamar.com www.sanjamar.com

#### Canada

15252 32nd Avenue Suite 309 Surrey, BC V3S 0R7 CANADA T: +1.262.723.6133 F: +1.262.723.4204

canada@sanjamar.com

#### **Europe**

Schoorstraat 26a, bus 1 2220 Heist op-den Berg BELGIUM T: +32 1522 8140 F: +32 1522 8148 emea@sanjamar.com

### México

Av. Universidad #1377-701 Colonia Axotla CP 01030 Del. Alvaro Obrego MEXICO, D.F. T: +52 (55) 3626 0772 F: +52 (55) 5273 4495 mexico@sanjamar.com



© Copyright San Jamar, Inc. 2015