

## NON-INSULATED TRANSPORT STORAGE CABINETS 100 SERIES

### FEATURES AND BENEFITS:

- Non-insulated all purpose cabinet for transport and storage.
- Same size top and base extend past sidewalls to act as natural bumpers for protection. Extruded frame fully welded
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility
- Reinforced, full length door swings 270° and can be latched to the cabinet side for convenience. Card clip included.
- Gravity type latch secures door during transport.
- Corrugated sidewalls securely hold 18" x 26" pans on 1-1/2" centers without tipping. Provides added strength.
- Interior pan stops on door allow proper air flow.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.



100-1841D



### ACCESSORIES and OPTIONS (Available at extra cost):

- Lock Hasp
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- Floor Lock (for use with 5" casters)
- Plexiglas Door
- Push Handle
- Bail Handle Kit
- Left-Hand Hinged Door
- Pass-Thru version of 100-1841D
- Kold Keepers

See page A-20 for accessory details.

## NON-INSULATED TRANSPORT STORAGE CABINETS 100 SERIES

### FEATURES AND BENEFITS:

- Non-insulated all purpose cabinet for transport and storage.
- Same size top and base extend past sidewalls to act as natural bumpers for protection. Extruded frame fully welded
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility
- Reinforced, full length door swings 270° and can be latched to the cabinet side for convenience. Card clip included.
- Gravity type latch secures door during transport.
- Corrugated sidewalls securely hold 18" x 26" pans on 1-1/2" centers without tipping. Provides added strength.
- Interior pan stops on door allow proper air flow.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.



100-1841D




### ACCESSORIES and OPTIONS (Available at extra cost):

- Lock Hasp
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- Floor Lock (for use with 5" casters)
- Plexiglas Door
- Push Handle
- Bail Handle Kit
- Left-Hand Hinged Door
- Pass-Thru version of 100-1841D
- Kold Keepers

See page A-20 for accessory details.

# 100 Series

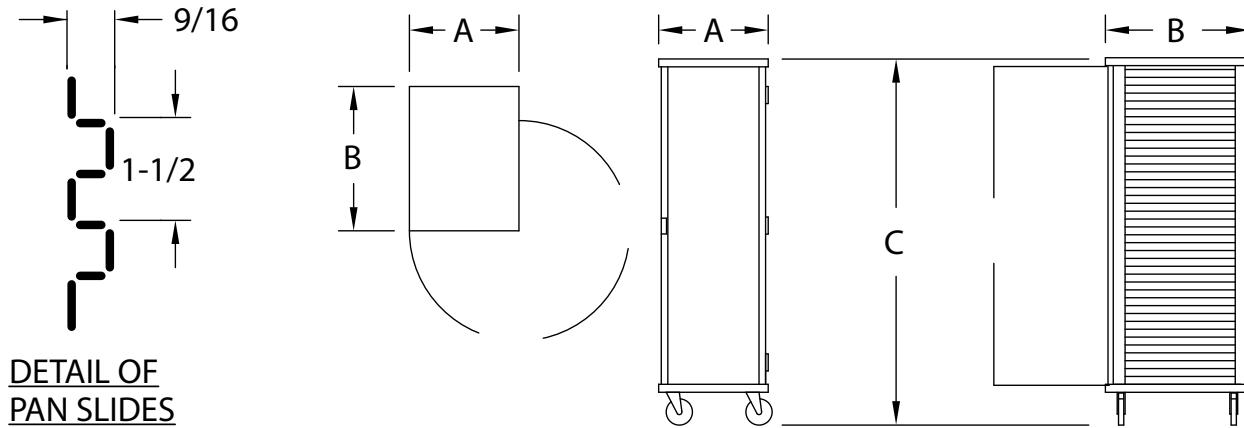

**DETAIL OF  
PAN SLIDES**

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
100-1841D	40	18 X 26	IN	20-7/8	27-1/2	69-3/4	18-1/16	26	61-1/2	LBS	105
		460 X 660	MM	530	700	1775	460	660	1565	KG	48
100-1833D	32	18 X 26	IN	20-7/8	27-1/2	57-3/4	18-1/16	26	49-1/2	LBS	93
		460 X 660	MM	530	700	1470	460	660	1260	KG	42
100-1822D	22	18 X 26	IN	20-7/8	27-1/2	42	18-1/16	26	33-3/4	LBS	75
		460 X 660	MM	530	700	1070	460	660	860	KG	34

NOTE: Send sample pan or tray with order when using any that are not an 18" x 26" pan with heavy beaded edge. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

### CABINET:

- Posts: Extruded channels, 7/8 x 2-1/4 x .102, welded to top and base, form a solid frame.
- Sides: .063 corrugations riveted to posts.
- Back panel: Fitted into posts, riveted to top and reinforced.
- Tie rod: Applied at front of all cabinets 57-3/4" high and over.
- Top: One piece .100 aluminum.

### BASE:

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

### DOOR:

- Panel: Formed .100 aluminum.
- Reinforcement: 1/4 x 1-1/2 extruded bars riveted horizontally to top, center and bottom.
- Latch: Gravity type, nickel plated steel.
- Swings 270° on 2 or 3 butt hinges, riveted to posts and door.
- Pan stop channel.

### PAN SLIDES:

- Corrugations act as pan slides on 1-1/2" centers.

### SHORT FORM SPECIFICATIONS

Cres Cor Utility Cabinet Model 100-18\_\_\_D. Formed and welded .100 aluminum top, .190 aluminum base. No-tip .063 corrugated aluminum sides for (\_\_\_) 18" x 26" pans on 1-1/2" centers. Formed .100 aluminum reinforced door. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_. NSF listed.




5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.

# 100 Series

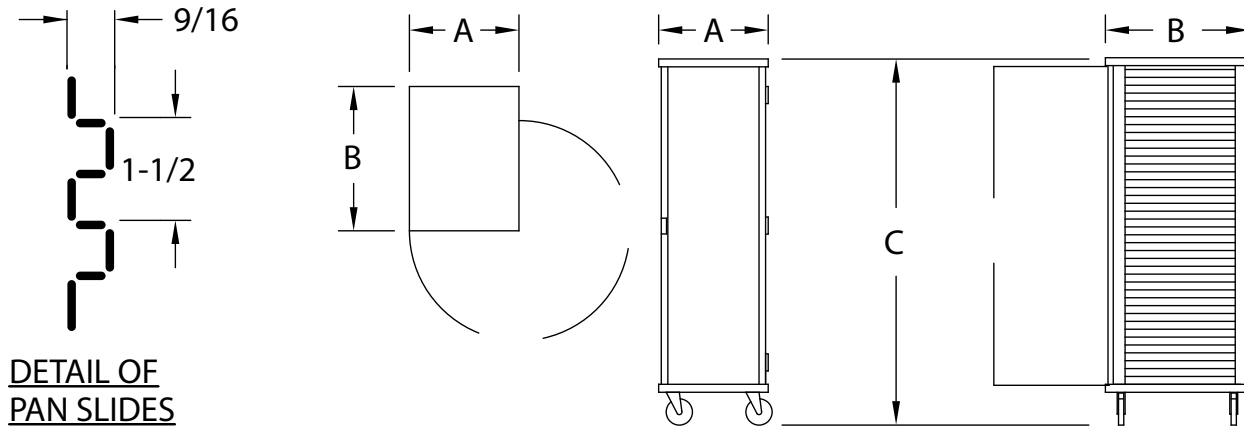

**DETAIL OF  
PAN SLIDES**

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
100-1841D	40	18 X 26	IN	20-7/8	27-1/2	69-3/4	18-1/16	26	61-1/2	LBS	105
		460 X 660	MM	530	700	1775	460	660	1565	KG	48
100-1833D	32	18 X 26	IN	20-7/8	27-1/2	57-3/4	18-1/16	26	49-1/2	LBS	93
		460 X 660	MM	530	700	1470	460	660	1260	KG	42
100-1822D	22	18 X 26	IN	20-7/8	27-1/2	42	18-1/16	26	33-3/4	LBS	75
		460 X 660	MM	530	700	1070	460	660	860	KG	34

NOTE: Send sample pan or tray with order when using any that are not an 18" x 26" pan with heavy beaded edge. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

### CABINET:

- Posts: Extruded channels, 7/8 x 2-1/4 x .102, welded to top and base, form a solid frame.
- Sides: .063 corrugations riveted to posts.
- Back panel: Fitted into posts, riveted to top and reinforced.
- Tie rod: Applied at front of all cabinets 57-3/4" high and over.
- Top: One piece .100 aluminum.

### BASE:

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

### DOOR:

- Panel: Formed .100 aluminum.
- Reinforcement: 1/4 x 1-1/2 extruded bars riveted horizontally to top, center and bottom.
- Latch: Gravity type, nickel plated steel.
- Swings 270° on 2 or 3 butt hinges, riveted to posts and door.
- Pan stop channel.

### PAN SLIDES:

- Corrugations act as pan slides on 1-1/2" centers.

### SHORT FORM SPECIFICATIONS

Cres Cor Utility Cabinet Model 100-18\_\_\_D. Formed and welded .100 aluminum top, .190 aluminum base. No-tip .063 corrugated aluminum sides for (\_\_\_) 18" x 26" pans on 1-1/2" centers. Formed .100 aluminum reinforced door. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.