

NON-INSULATED HOT CABINETS 131UA SERIES

FEATURES AND BENEFITS:

- Non-Insulated hot cabinet to keep prepared foods at serving temperatures.
- Powerful, yet efficient, heating system maintains the right temperature to properly hold products. 2000 Watt cabinet holds foods at up to 180°F (82°C).
- Body constructed of non-corrosive, Hi-Tensile aluminum with extruded frame fully welded for strength and ease of mobility.
- Perimeter door gasket minimizes heat loss.
- Reinforced, field reversible brushed aluminum door for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Magnetic type latch secures door during transport.
- Wire universal angles accommodate a large variety of pan sizes on adjustable 1-1/2" centers.
- Controls accessible without opening door; allows adjustments without interrupting process.
- Slanted control panel has easy-to-read thermometer; entire assembly removable for cleaning and maintenance.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

NOTE: *This product does not pass California energy standards and therefore cannot be sold into the state.*




Model shown: 131UA11D



ACCESSORIES and OPTIONS (Available at extra cost):

- Lock Hasp
- Lexan Door
- Extra Universal Angles
- Dutch Doors
- Corner Bumpers
- Perimeter Bumper (three sided)
- Push Handle
- Various Caster Options
- Digital Thermometer
- 208 or 240 Volt Service

See page B-30 for accessory details.

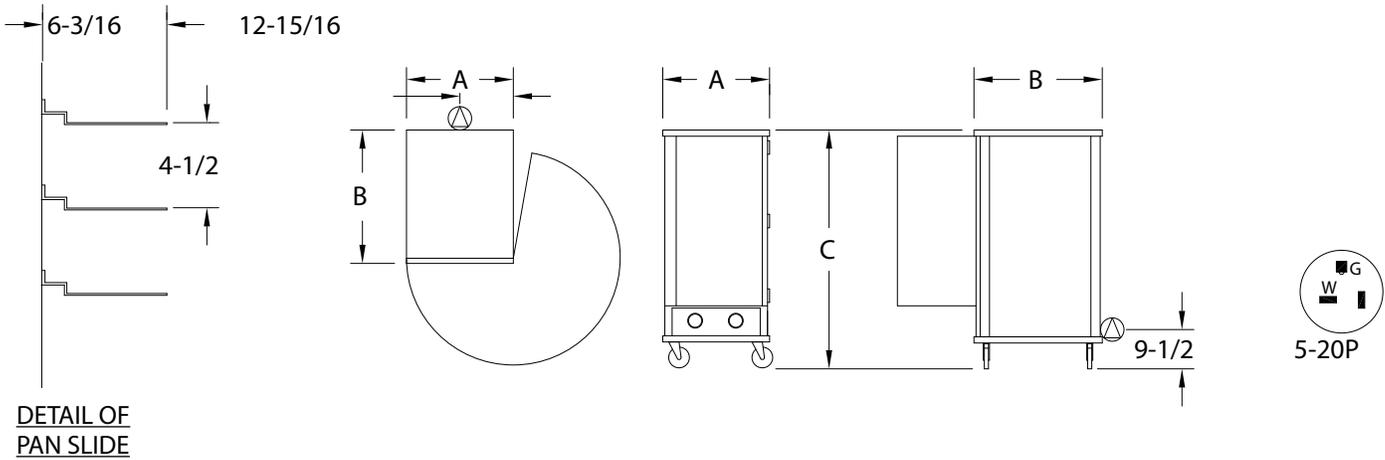

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP/ ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
131UA9D	9 SETS	SEE NOTE BELOW	IN	24-1/4	32	57-3/4	21-1/4	28-1/4	42-3/8	LBS	173
			MM	620	815	1470	540	718	1080	KG	78
131UA11D	11 SETS	SEE NOTE BELOW	IN	24-1/4	32	69-3/4	21-1/4	28-1/4	54-3/8	LBS	198
			MM	620	815	1775	540	718	1385	KG	90

NOTES: 1. Pan sizes 22" x 20" (560 x 510) Roast & Bake Pans, 10" x 20" (255 x 510) Roast & Bake Pans, 18" x 26" (460 x 660) Bun Pans, 14" x 18" (355 x 460) Service Trays, 12" x 20" (305 x 510) Steam Table Pans. Refer to Pan Size Chart at end of section.
 2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:

- Top: One piece .063 aluminum; riveted to sides and back.
- Side panels: Formed .063 aluminum; fastened to base and top.
- Back: .063 aluminum; fastened to base and top.
- Air tunnel: .063 aluminum; lift-out type, mounted to the back panel.

BASE:

- One piece construction, .125 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

DOOR:

- Field reversible.
- Panel: .063 brushed aluminum, fitted into door frame extrusions, 13/16 x 1-11/16 x .154; Black powder coated.
- Latch: Chrome plated steel, magnetic type; mounted inboard
- Hinges (2): Chrome plated steel.
- Gasket: Perimeter type, Santoprene rubber.

PAN SLIDES:

- Wire angles, (.306 dia.) nickel chrome plated steel, mounted on lift-out posts.
- Spaced on 4-1/2" centers; adjustable on 1-1/2" centers.



Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Customer Service.

If you need a QR reader visit your App Store on your Smartphone or Tablet.

HOT UNIT COMPONENTS:

- Removable bottom mount hot unit.
- Body: Formed .063 aluminum with black control panel.
- Thermostat: Mechanical, room ambient to 180°F (82°C).
- Switch: ON-OFF rocker type.
- Power light
- Power cord: Permanent, 6 ft., 12/3 ga. with molded plug.
- Heater: 1850 Watts.
- Blower motor.
- Thermometer.

POWER REQUIREMENTS:

- 2000 Watts, 120 Volts, 60 Hz., single phase, 16.7 Amps., 20 Amp. service.

SHORT FORM SPECIFICATIONS

Cres Cor Hot Cabinet Model 131UA-___D. Formed and welded .063 aluminum top, .125 aluminum base. (___) sets extruded universal angles for multiple pan sizes, adjustable spacing every 1-1/2". Brushed .063 aluminum door. Removable 2000 Watt, 120 Volt power unit. Controls accessible without opening door. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 1-Year Parts / 90-Day Labor warranty. Provide the following accessories: _____ CSA-US, CSA-C, CSA to NSF4 listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2022 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Made in America Since 1936