### ITB-Low Profile, 120V

Height: 29.4" Width: 11.7" Depth: 23.7" (74.7cm) (29.7cm) (60.2cm)





- Sleek, modernized design language on the brewer, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Easy pulse display allows for simplified programming of pulse routine
- Compact, low-profile styling to accommodate a variety of spaces
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 7-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.

Additional Features

• Includes overlay kit for customization of brewer interface

#### Agency:





#### **Specifications**

**Product #:** 52000.0101 **Legs:** 4" Black Legs

Water Access: Plumbed

Finish: Stainless

Funnel: Translucent Tea Funnel

#### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	Yes	NEMA 5-15P	336	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements

PSI kPa		kPa	Fitting Supplied	Water Flow Required (GPM)				
	20-90	138-621	1/4" Male Flare Fitting	1.25				


## CAD Drawings

2D	Revit	KLC			

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

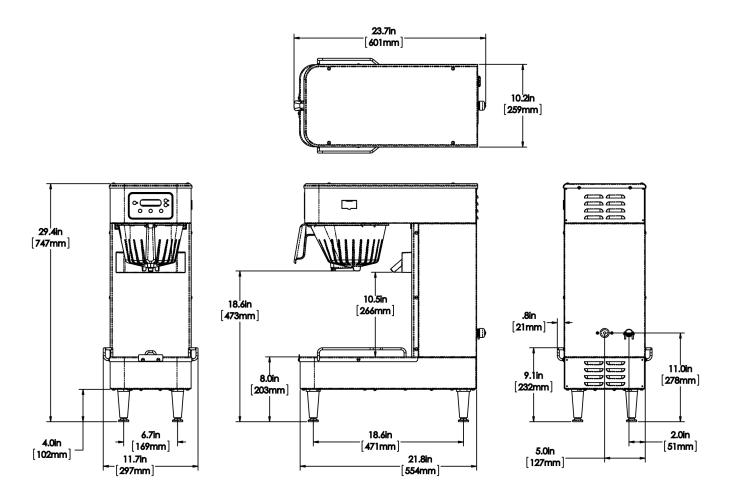

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	29.4 in.	11.7 in.	23.7 in.	33.8 in.	13.8 in.	26.4 in.	36.150 lbs	7.083 ft <sup>3</sup>
Metric	74.7 cm	29.7 cm	60.2 cm	85.7 cm	34.9 cm	67.0 cm	16.398 kgs	0.201 m³



## Related Products & Accessories: ITB-Low Profile, 120V(52000.0101)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



TEA

Product #: 39000.0007



FUNNEL ASSY, SMART COFFEE BLK-CLEARED

Product #: 53463.0021



NATURAL QUICK BREW

Product #: 53463.0023

FUNNEL ASSY, TEA NATURAL QUICK BREW

Product #: 53463.0036













# Serving & Holding Options: ITB-Low Profile, 120V(52000.0101)



