

APPLICATION:

PRODUCT NAME:
PRE-RINSE SPRAY VALVE HOSE


JOB NAME:

MODEL:

QUANTITY:

ITEM NO.:

- 12114 PRE-RINSE SPRAY VALVE HOSE 12"
- 2916-151/2 PRE-RINSE SPRAY VALVE HOSE 15"
- 12122 PRE-RINSE SPRAY VALVE HOSE 18"
- 12130 PRE-RINSE SPRAY VALVE HOSE 21"
- 2916-251/2 PRE-RINSE SPRAY VALVE HOSE 25"
- 12149 PRE-RINSE SPRAY VALVE HOSE 27"
- 12157 PRE-RINSE SPRAY VALVE HOSE 30"
- 2914 PRE-RINSE SPRAY VALVE HOSE 36"
- 12165 PRE-RINSE SPRAY VALVE HOSE 42"
- 12173 PRE-RINSE SPRAY VALVE HOSE 48"
- 12181 PRE-RINSE SPRAY VALVE HOSE 54"
- 2915 PRE-RINSE SPRAY VALVE HOSE 60"
- 12203 PRE-RINSE SPRAY VALVE HOSE 72"
- 12211 PRE-RINSE SPRAY VALVE HOSE 84"
- 12238 PRE-RINSE SPRAY VALVE HOSE 96"
- 12246 PRE-RINSE SPRAY VALVE HOSE 108"
- 12254 PRE-RINSE SPRAY VALVE HOSE 120"
- 12262 PRE-RINSE SPRAY VALVE HOSE 132"
- 12270 PRE-RINSE SPRAY VALVE HOSE 144"

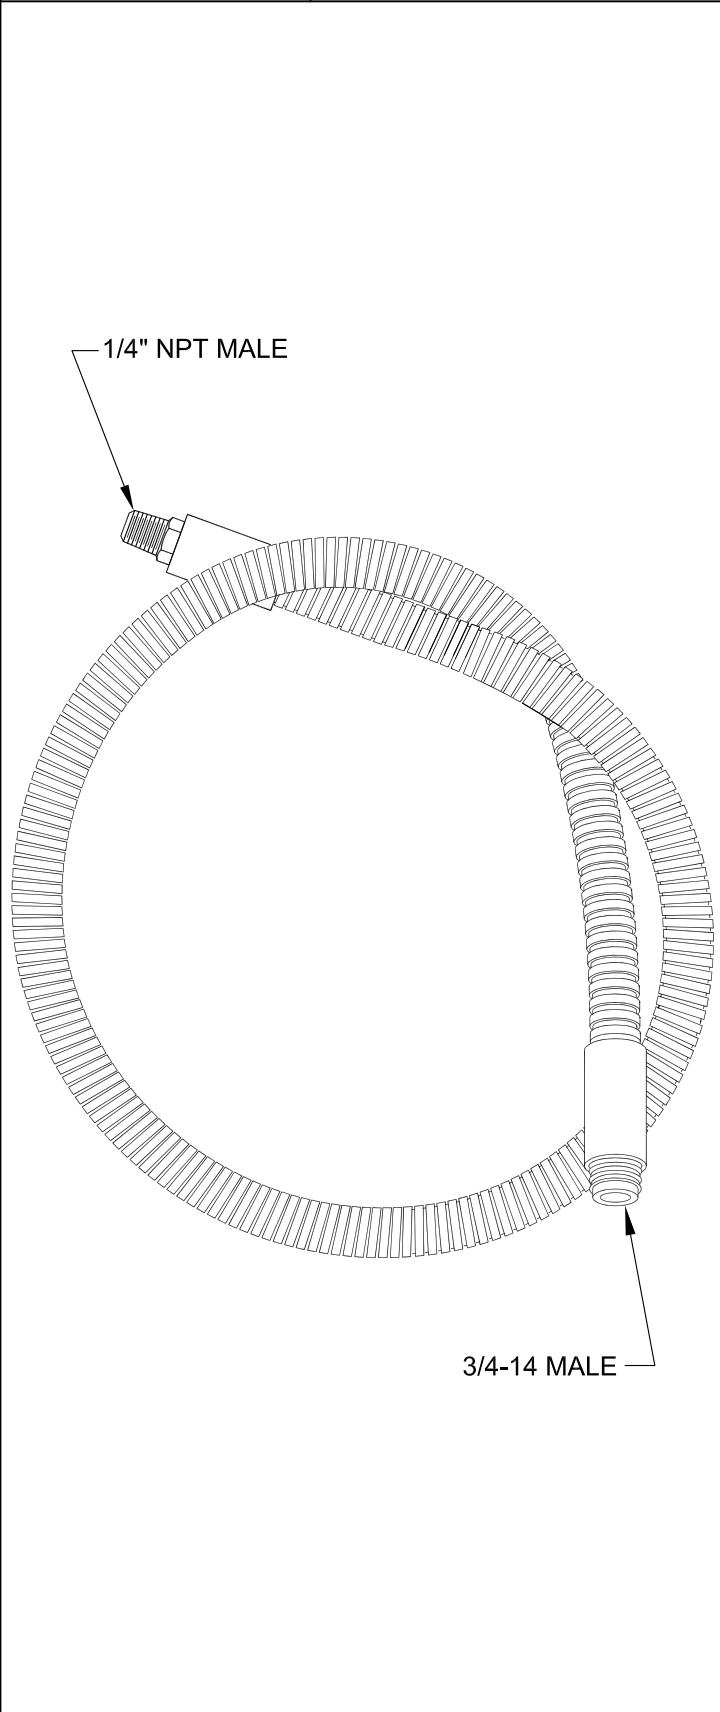

OPTIONS OR MODIFICATIONS:
 OTHER _____

FEATURES

- HOSE**
- * STAINLESS STEEL END FITTINGS
 - * STAINLESS STEEL EXTERNAL JACKET
 - * 3-PLY FIBER REINFORCED INTERNAL RUBBER

- HOSE**
- * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS

- SYSTEM LIMITS**
- * TEMP: 40°F MIN. TO 160°F MAX.
 - * PRESSURE: 200 PSI MAX. STATIC

- PRODUCT COMPLIANCE:**
- * ASME A112.18.1 / CSA B125.1
 - * NSF 61 - Section 9
 - * NSF 372 (Low Lead Content)

3/4-14 MALE



FISHER MANUFACTURING COMPANY
TOLL FREE: 800-421-6162 - FAX: 800-832-8238
information@fisher-mfg.com - www.fisher-mfg.com